

MOS FIELD EFFECT TRANSISTOR

2SK3434

SWITCHING N-CHANNEL POWER MOS FET INDUSTRIAL USE

DESCRIPTION

The 2SK3434 is N-channel MOS Field Effect Transistor designed for high current switching applications.

FEATURES

• Super low on-state resistance

 $R_{DS(on)1} = 20 \text{ m}\Omega$ MAX. (Vgs = 10 V, ID = 24 A)

 $R_{DS(on)2} = 31 \text{ m}\Omega$ MAX. (Vgs = 4.0 V, ID = 24 A)

- Low Ciss: Ciss = 2100 pF TYP.
- Built-in gate protection diode

ORDERING INFORMATION

PART NUMBER	PACKAGE
2SK3434	TO-220AB
2SK3434-S	TO-262
2SK3434-ZJ	TO-263
2SK3434-Z	TO-220SMD ^{Note}

Note TO-220SMD package is produced only in Japan.

(TO-220AB)

ABSOLUTE MAXIMUM RATINGS (TA = 25°C)

Drain to Source Voltage	VDSS	60	V
Gate to Source Voltage	Vgss	±20	V
Drain Current (DC)	I _{D(DC)}	±48	Α
Drain Current (pulse) Note1	D(pulse)	±120	Α
Total Power Dissipation (Tc = 25°C)	PT	56	W
Total Power Dissipation (T _A = 25°C)	PT	1.5	W
Channel Temperature	Tch	150	°C
Storage Temperature	T_{stg}	-55 to +150	°C
Single Avalanche Current Note2	IAS	28	Α
Single Avalanche Energy Note2	Eas	78	mJ

Notes 1. PW \leq 10 μ s, Duty cycle \leq 1%

2. Starting T_{ch} = 25°C, R_G = 25 Ω , V_{GS} = 20 \rightarrow 0 V



(TO-262)



(TO-263,TO-220SMD)



The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version. Not all devices/types available in every country. Please check with local NEC representative for availability and additional information.



ELECTRICAL CHARACTERISTICS (TA = 25 °C)


CHARACTERISTICS	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Zero Gate Drain Current	Inss	Vps = 60 V, Vgs = 0 V			10	μΑ
Gate Cut-off Voltage	VGS(off)	Vps = 10 V, Ip = 1 mA	1.5	2.0	2.5	V
Forward Transfer Admittance	y fs	V _{DS} = 10 V, I _D = 24 A	13	27		S
Drain to Source On-state Resistance	RDS(on)1	V _G S = 10 V, I _D = 24 A		16	20	mΩ
	RDS(on)2	Vgs = 4.0 V, ID = 24 A		22	31	mΩ
Input Capacitance	Ciss	V _{DS} = 10 V		2100		pF
Output Capacitance	Coss	V _G S = 0 V		340		pF
Reverse Transfer Capacitance	Crss	f = 1 MHz		170		pF
Turn-on Delay Time	td(on)	VDD = 30 V, ID = 24 A		40		ns
Rise Time	tr	V _{GS(on)} = 10 V		400		ns
Turn-off Delay Time	td(off)	R _G = 10 Ω		120		ns
Fall Time	t f			160		ns
Total Gate Charge	Q _G	VDD = 48 V		40		nC
Gate to Source Charge	Qgs	V _G S = 10 V		7		nC
Gate to Drain Charge	Q _{GD}	ID = 48 A		11		nC
Body Diode Forward Voltage	V _{F(S-D)}	IF = 48 A, VGS = 0 V		1.0		V
Reverse Recovery Time	trr	IF = 48 A, VGS = 0 V		43		ns
Reverse Recovery Charge	Qrr	di/dt = 100 A/μs		61		nC

TEST CIRCUIT 1 AVALANCHE CAPABILITY


$V_{CS} = 20 \text{ V} \rightarrow 0 \text{ V}$ V_{DD} V_{DD}

Starting Tch

TEST CIRCUIT 2 SWITCHING TIME



TEST CIRCUIT 3 GATE CHARGE



20


0


0 20

TYPICAL CHARACTERISTICS (TA = 25°C)



DERATING FACTOR OF FORWARD BIAS





FORWARD BIAS SAFE OPERATING AREA


80

Tch - Channel Temperature - °C

100 120


140 160

40 60

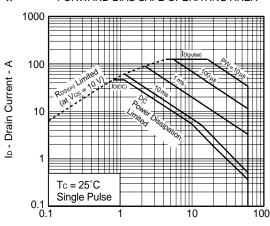


VDS - Drain to Source Voltage - V

TRANSIENT THERMAL RESISTANCE vs. PULSE WIDTH

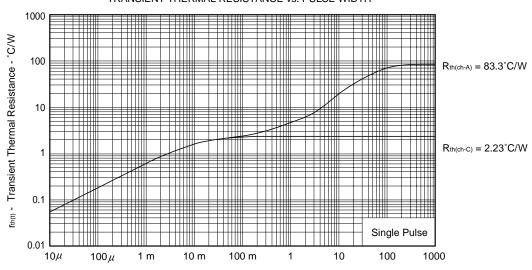


PW - Pulse Width - s

FORWARD TRANSFER CHARACTERISTICS

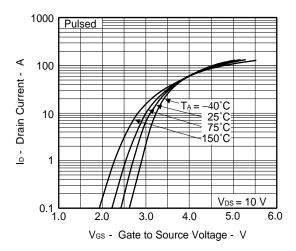


DRAIN CURRENT vs. DRAIN TO SOURCE VOLTAGE

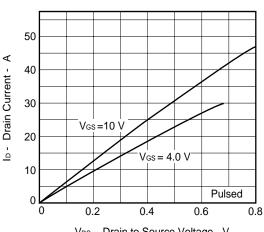


V_{DS} - Drain to Source Voltage - V


FORWARD TRANSFER ADMITTANCE vs. DRAIN CURRENT

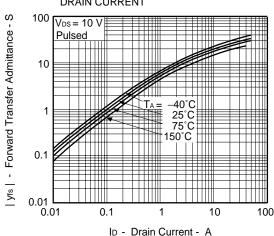


DRAIN TO SOURCE ON-STATE RESISTANCE vs. GATE TO SOURCE VOLTAGE

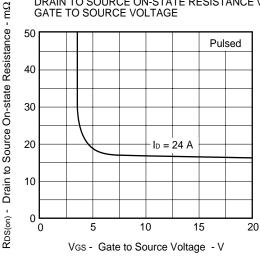



DRAIN TO SOURCE ON-STATE RESISTANCE vs. DRAIN CURRENT

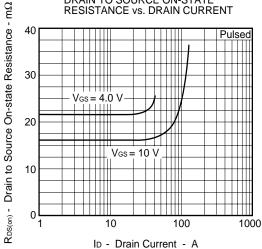

GATE TO SOURCE THRESHOLD VOLTAGE vs. CHANNEL TEMPERATURE

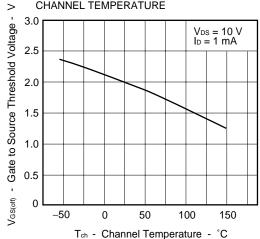

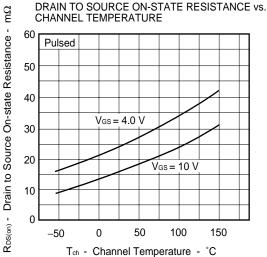

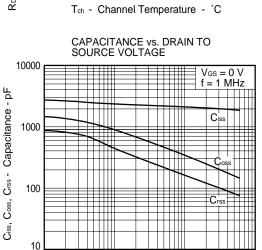


10


V_{DS} - Drain to Source Voltage - V

100


0.1

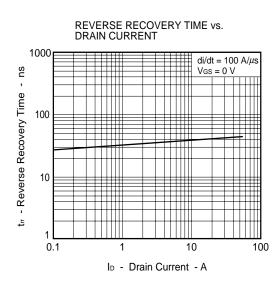


SOURCE TO DRAIN DIODE FORWARD VOLTAGE





SWITCHING CHARACTERISTICS



DYNAMIC INPUT/OUTPUT CHARACTERISTICS

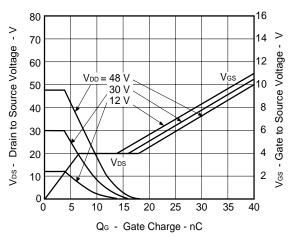


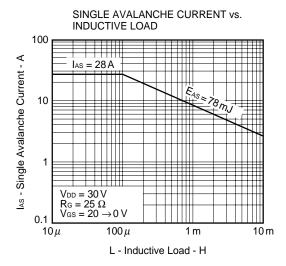

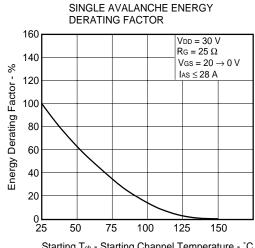


PACKAGE DRAWINGS (Unit: mm)


1) TO-220AB(MP-25)

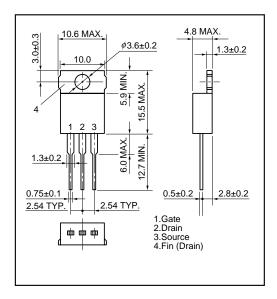


2) TO-262(MP-25 Fin Cut)

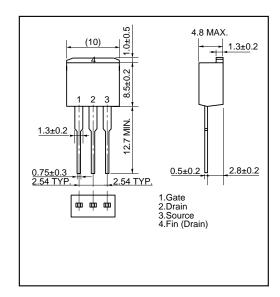

3) TO-263 (MP-25ZJ)

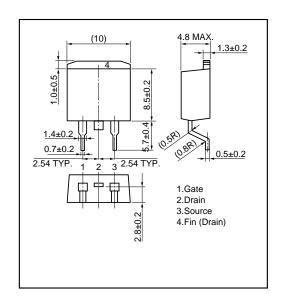


4) TO-220SMD(MP-25Z)^{Note}

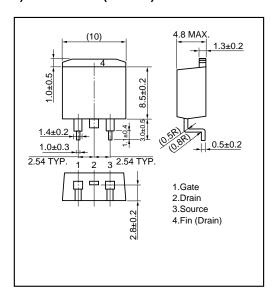

Note This package is produced only in Japan.

EQUIVALENT CIRCUIT



Remark

The diode connected between the gate and source of the transistor serves as a protector against ESD. When this device actually used, an additional protection circuit is externally required if a voltage exceeding the rated voltage may be applied to this device.

- The information in this document is current as of March, 2001. The information is subject to change
 without notice. For actual design-in, refer to the latest publications of NEC's data sheets or data
 books, etc., for the most up-to-date specifications of NEC semiconductor products. Not all products
 and/or types are available in every country. Please check with an NEC sales representative for
 availability and additional information.
- No part of this document may be copied or reproduced in any form or by any means without prior written consent of NEC. NEC assumes no responsibility for any errors that may appear in this document.
- NEC does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC semiconductor products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative
 purposes in semiconductor product operation and application examples. The incorporation of these
 circuits, software and information in the design of customer's equipment shall be done under the full
 responsibility of customer. NEC assumes no responsibility for any losses incurred by customers or third
 parties arising from the use of these circuits, software and information.
- While NEC endeavours to enhance the quality, reliability and safety of NEC semiconductor products, customers
 agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize
 risks of damage to property or injury (including death) to persons arising from defects in NEC
 semiconductor products, customers must incorporate sufficient safety measures in their design, such as
 redundancy, fire-containment, and anti-failure features.
- NEC semiconductor products are classified into the following three quality grades:
 - "Standard", "Special" and "Specific". The "Specific" quality grade applies only to semiconductor products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of a semiconductor product depend on its quality grade, as indicated below. Customers must check the quality grade of each semiconductor product before using it in a particular application.
 - "Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots
 - "Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)
 - "Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.

The quality grade of NEC semiconductor products is "Standard" unless otherwise expressly specified in NEC's data sheets or data books, etc. If customers wish to use NEC semiconductor products in applications not intended by NEC, they must contact an NEC sales representative in advance to determine NEC's willingness to support a given application.

(Note)

- (1) "NEC" as used in this statement means NEC Corporation and also includes its majority-owned subsidiaries.
- (2) "NEC semiconductor products" means any semiconductor product developed or manufactured by or for NEC (as defined above).

M8E 00.4