

DESCRIPTION


This device integrates high-speed 64K x18 SRAM core, address registers, data input registers, a 2-bit burst address counter and Non-pipelined output. All synchronous inputs pass through registers controlled by a positive-edge triggered clock(K).

The device is ideally suited for 486/Pentium system by including all necessary timing and control logic on a chip. Any external address latches, counters, or other timing and control logic are not necessary.

FEATURES

- Single 5.0V±5% Power Supply
- 15ns/20ns access times from clock
- Support up to 50MHz System Operation
- Optimized for use with Intel 486/Pentium secondary cache applications (Interleaved burst sequence and Linear burst sequence)
- Byte writable using separate upper/lower byte write input controls
- On-chip burst address counter
- On-chip clocked input and output registers
- 3-state buffered output with asynchronous output enable control
- Standard 52-lead PLCC package with JEDEC pinout


PIN CONNECTION



PART NUMBER EXAMPLES

Part No.	Burst Sequence
HY6718110	Interleaved
HY6718111	Linear

FUNCTION BLOCK DIAGRAM

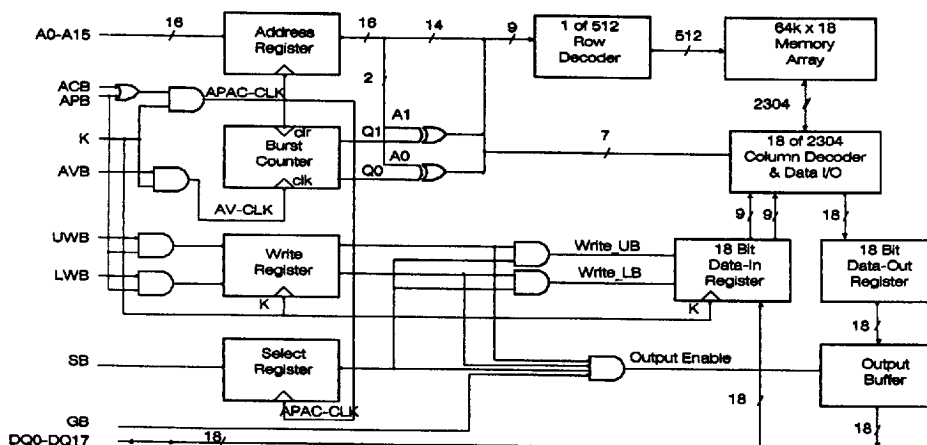

This document is a general product description and is subject to change without notice. Hyundai Electronics does not assume any responsibility for use of circuits described. No patent licences are implied.

1DH03-11-MAY95

4675088 0006256 990

245

PIN DESCRIPTIONS

SYMBOL	PIN NUMBER	TYPE	DESCRIPTION
K	51	Input	Clock. This signal is used to synchronize the device with the system timing. It registers the Addresses, Data inputs, Byte Write Enables and Chip Enable. It may clear or increment the burst counter depending on the state of APB, ACB and AVB.
A0-An	6, 7, 21, 22, 23, 24, 25, 26, 29, 30, 31, 32, 33, 47, 48, 49	Input	Synchronous Address. The addresses are registered at rising edge of the clock.
SB	5	Input	Chip Select. A synchronous control input used to enable(LOW state) and disable(HIGH state) the device. This input is sampled and registered only when a new base address cycle is initiated.
UWB/ LWB	3, 4	Input	Upper and Lower Byte Write Enable. Synchronous control input registered by rising edge of the clock. A LOW state allows data to be written into the device, and a HIGH state initiates a read cycle. UWB controls upper byte(DQ9-17) and LWB controls lower byte(DQ0-8).
APB	1	Input	Address Status from Processor. A synchronous control input registered by rising edge of the clock. A LOW state interrupts the burst sequence and loads in a new address. The device will read out the data at new address. This input over-rides ACB and UWB/LWB.
ACB	2	Input	Address Status from Cache Controller. A synchronous control input registered by rising edge of the clock. When this input is at LOW state and APB is HIGH state, burst sequence is interrupted and new addresses are loaded into the device. The device will perform a read or write cycle with new addresses.
AVB	52	Input	Burst Address Advance. A synchronous control input registered by rising edge of the clock. When this input is at LOW state, the burst counter increments at rising clock edge. A HIGH state will insert wait states into the burst sequence. The burst addresses will wrap around to the initial state after burst counter completed a burst sequence.
GB	50	Input	Output Enable. An asynchronous control input. A LOW state will enable the DQs and a HIGH state will tri-state the DQs.
DQ0-n	8, 9, 12, 13, 14, 15, 18, 19, 20, 34, 35, 38, 39, 40, 41, 44, 45, 46	Input/ Output	Data Input/Outputs. A bi-directional common I/O data pins. GB controls the pins when the device is outputting the data(read cycle) . At write cycle, input data are registered at rising edge of the clock.
Vcc	28	Supply	Positive Power Supply: +5.0V±5%
Vss	27	Supply	Negative Power Supply and Ground Return.
Vccq	10, 17, 36, 43	Supply	Isolated Output Buffer Supply: +5.0V±5%
Vssq	11, 16, 37, 42	Supply	Isolated Output Buffer Ground: GND

4675088 0006257 827

TRUTH TABLE

OPERATION	ADD.	SB	LWB	UWB	APB	ACB	AVB	K	GB	DQ
Deselected, Outputs High Z	X	H	X	X	X	L	X	L-H	X	Hi-Z
Output Disabled, Outputs High Z	X	X	X	X	X	X	X	X	H	Hi-Z
Register New Base Address, Read from Base Address During Next Cycle	NBA	L	X	X	L	X	X	L-H	L	VQ
Register New Base Address, Read from Base Address During Next Cycle	NBA	L	H	H	H	L	X	L-H	L	VQ
Increment Burst Address, Read from Incremented Address During Next Cycle	X	X	H	H	H	H	L	L-H	L	VQ
Read, Non-Incremented Burst Address : Wait-State	X	X	H	H	H	H	H	L-H	L	VQ
Register New Base Address, Write Both Bytes at Base Address	NBA	L	L	L	H	L	X	L-H	X	VD
Register New Base Address, Write Only the Lower Byte at Base Address	NBA	L	L	H	H	L	X	L-H	X	VD
Register New Base Address, Write Only the Upper Byte at Base Address	NBA	L	H	L	H	L	X	L-H	X	VD
Increment Burst Address, Write Both Bytes at Incremented Address	X	X	L	L	H	H	L	L-H	X	VD
Increment Burst Address, Write Only Lower Byte at Incremented Address	X	X	L	H	H	H	L	L-H	X	VD
Increment Burst Address, Write Only Upper Byte at Incremented Address	X	X	H	L	H	H	L	L-H	X	VD
Write Both Bytes, Non-Incremented Burst Address : Wait-State	X	X	L	L	H	H	H	L-H	X	VD
Lower Byte Write, Non-Incremented Burst Address : Wait-State	X	X	L	H	H	H	H	L-H	X	VD
Upper Byte Write, Non-Incremented Burst Address : Wait-State	X	X	H	L	H	H	H	L-H	X	VD

NOTE :

All inputs except GB must meet set-up and hold times on the rising edge(LOW to HIGH) of K. The burst counter is cleared or incremented by the rising edge of K combined with the control inputs APB, ACB and AVB.

Hi-Z = High Impedance
VQ = Valid Data Output
VD = Valid Data Input
NBA = New Base Address

X = Don't Care : Input
Changing : Output
L = Low
H = High

4675088 0006258 763

INTERLEAVED BURST SEQUENCE TABLE

Note that in every case the sequence starts with the initial address, then complements the RAM LSB, then complements both, and finally complements the RAM 2nd LSB, it is only when application-specific address weights are assigned that the sequence appears to differ.

APPLICATION TYPE	SEQUENCE 0	SEQUENCE 1	SEQUENCE 2	SEQUENCE 3
486 Application :				
Initial	00	04	08	0C
First in Burst	04	00	0C	08
Second in Burst	08	0C	00	04
Third in Burst	0C	08	04	00
Pentium Application :				
Initial	00	08	10	18
First in Burst	08	00	18	10
Second in Burst	10	18	00	08
Third in Burst	18	10	08	00
Arbitrary Application :				
Initial	RAM A1 A0	RAM A1 A0	RAM A1 A0	RAM A1 A0
First in Burst	RAM A1 A0B	RAM A1 A0B	RAM A1 A0B	RAM A1 A0B
Second in Burst	RAM A1B A0	RAM A1B A0	RAM A1B A0	RAM A1B A0
Third in Burst	RAM A1B A0B	RAM A1B A0B	RAM A1B A0B	RAM A1B A0B

LINEAR BURST SEQUENCE TABLE

	SEQUENCE 0	SEQUENCE 1	SEQUENCE 2	SEQUENCE 3
Initial	RAM A1B A0B	RAM A1B A0	RAM A1 A0B	RAM A1 A0
First in Burst	RAM A1B A0	RAM A1 A0B	RAM A1 A0	RAM A1B A0B
Second in Burst	RAM A1 A0B	RAM A1 A0	RAM A1B A0B	RAM A1B A0
Third in Burst	RAM A1 A0	RAM A1B A0B	RAM A1B A0	RAM A1 A0B

ABSOLUTE MAXIMUM RATINGS

Stress greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in the excess of those given in the operation sections of this data sheet. Exposure to Absolute Maximum Ratings for extended periods can adversely affect device reliability.

Parameter	SYMBOL	MIN	MAX	UNIT
Storage Temperature	T _{STG}	-55	125	°C
Junction Temperature	T _C	...	125	°C
Case Temperature Under Bias	...	-10	85	°C
V _{CC} Potential to V _{SS}	...	-0.5	6	V
Input Voltage(dc)	...	-0.5	V _{CC} +0.5	V

RECOMMENDED OPERATING CONDITIONS

Recommended Operating Conditions are defined as the range of operating conditions over which the device performance meets or exceeds the specified DC characteristics.

PARAMETER	SYMBOL	MIN	MAX	UNIT
Operating Supply	V _{CC}	4.75	5.25	V
Supply Return, Reference Level	V _{SS}	0.0	0.0	V
Input Low Voltage Level	V _{IL}	-0.5	0.8	V
Input High Voltage Level	V _{IH}	2.2	V _{CC} +0.5	V
Case Temperature	T _C	0	70	°C

4675088 0006260 311

ELECTRICAL CHARACTERISTIC

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Voltage : High Low	V _{IH}	...	2.2	...	V _{CC} +0.5	V
	V _{IL}	...	-0.5	...	0.8	V
Output Voltage : High Low	V _{OH}	I _{OH} =-4.0mA	2.4	V
	V _{OL}	I _{OL} =8.0mA	0.4	V
Input Leakage Current	I _{L1}	0V≤V _{IN} ≤V _{CC}	-2	...	2	μA
Output Leakage Current	I _{LO}	G _B ≥V _{CC} -0.2, 0V≤V _{OUT} ≤V _{CC}	-2	...	2	μA
Power Supply Current : Operating	I _{CC}	Device selected, all inputs≤V _{IL} or ≥V _{IH} , V _{CC} =MAX, T _{cy} ≥t _{KC} min, outputs open.	15ns	...	250	mA
			20ns	...	225	mA
			25ns	...	180	mA
CMOS Standby	I _{sb1}	Device deselected ; S ₁ ≥V _{CC} -0.2, A _C ≤V _{SS} +0.2, all inputs ≤V _{SS} +0.2 or ≥V _{CC} -0.2, all inputs static, V _{CC} =MAX, f _{CLK} =0.	3	mA
	I _{sb2}	Device deselected ; S ₁ ≥V _{CC} -0.2, A _C ≤V _{SS} +0.2, all inputs ≤V _{SS} +0.2 or ≥V _{CC} -0.2, all inputs static, V _{CC} =MAX, cycle time≥t _{KC} min.	80	mA
	I _{sb3}	Device deselected; S ₁ ≥V _{IH} , A _C ≤V _{IL} , all inputs ≤V _{IL} or ≥V _{IH} , all inputs static, V _{CC} =MAX, f _{CLK} =0.	20	mA
Short Circuit Output Current	I _{OS}	-	50	mA

4675088 0006261 258

TIMING CHARACTERISTICS

SYMBOL	'486/P5 Local Bus Rate	33MHz		40MHz		50MHz		Unit
	Cache RAM	25ns		20ns		15ns		
	Parameter	Min	Max	Min	Max	Min	Max	
tcyc	Cycle Time	30	...	25	...	20	...	ns
tkqv	Access Time from Clock	...	25	...	20	...	15	ns
tis	Input Setup Time	3	...	2.0	...	2.0	...	ns
tas	Address							
tss	Select							
taps	Address Status - μ P							
tacs	Address Status - Controller							
tavs	Address Advance							
tws	Write Enables(LWB, UWB)							
t ds	Data In							
tiH	Input Hold Time	3	...	2.0	...	2.0	...	ns
tAH	Address							
tSH	Select							
tAPH	Address Status - μ P							
tACH	Address Status - Controller							
tAVH	Address Advance							
tWH	Write Enables (LWB, UWB)							
tDH	Data In							
tkH	Clock High Pulse Width	10	...	7	...	5.5	...	ns
tkL	Clock Low Pulse Width	10	...	7	...	5.5	...	ns
tGLQX	Output Enable to Output Active	3	...	2	...	1	...	ns
tGLQV	Output Enable Time	...	7	...	6	...	6	ns
tGHQZ	Output Disable Time	...	7	...	6	...	6	ns
tkQX	Output Change from Clock & Output Enable from Clock	4	...	3	...	3	...	ns
tkQZ	Output Disable from Clock	...	10	...	8	...	7	ns


NOTE :

1. Switching measurements are from 1.5V levels on the inputs to 1.5V levels on the outputs, except for enable and disable times.
2. Enable and disable time measurements are from 1.5V levels on the inputs to change of 0.1V in the output levels.
3. See figure AC TEST LOAD A. for output load.
4. Input levels for switching measurements are 0V to 3.0V.
5. Input rise and fall times for switching measurements are $\leq 2.0\text{ns}$ (20% to 80%).
6. This unit is measured using output loading as specified in figure AC TEST LOAD B.

4675088 0006262 194

TIMING DIAGRAM

READ CYCLE

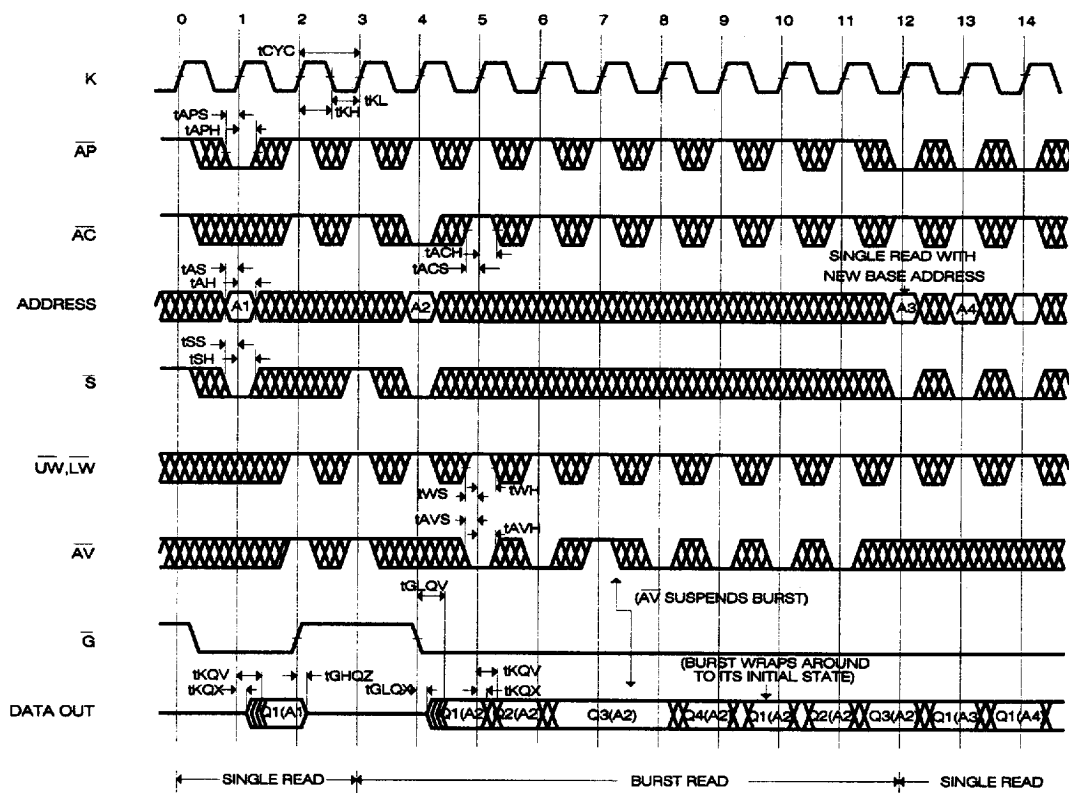

The timing diagram illustrates the sequence of signals for burst read and burst write operations over 12 clock cycles (0 to 11). The signals shown are:

- K**: Clock signal.
- AP**: Address Strobe (Active Low).
- AC**: Address Counter Enable (Active Low).
- ADDRESS**: Address bus signal, showing addresses A1, A2, and A3.
- S**: Status signal (Active Low).
- UW, LW**: User/Local Write Enable (Active Low).
- AV**: Address Valid (Active Low).
- G**: Global Enable (Active Low).
- DATA IN**: Data bus signal for burst read and burst write.
- DATA OUT**: Data bus signal for burst read and burst write.

Key timing parameters and annotations include:


- tCYC**: Clock cycle time.
- tAPL**: Address Pulse Low time.
- tAPH**: Address Pulse High time.
- tAS**: Address Setup time.
- tAH**: Address Hold time.
- tSS**: Status Setup time.
- tSH**: Status Hold time.
- tWS**: Write Strobe Setup time.
- tWH**: Write Strobe Hold time.
- tVS**: Valid Setup time.
- tVH**: Valid Hold time.
- tDS**: Data Setup time.
- tDH**: Data Hold time.
- tGHQZ**: Global Enable Hold time.
- AC EXTENDS BURST**: Annotation indicating that the Address Counter Enable signal extends the burst duration.
- AV SUSPENDS BURST**: Annotation indicating that the Address Valid signal suspends the burst.

Legend for burst operations:


- BURST READ**: Indicated by a horizontal line with a star at the start.
- SINGLE WRITE**: Indicated by a horizontal line with a star at the end.
- BURST WRITE**: Indicated by a horizontal line with a star at the start and end.
- EXTENDED BURST WRITE**: Indicated by a horizontal line with a star at the start and end, and a longer duration.

* When \overline{AP} initiates the burst sequence, the \overline{W} control input is ignored for the first cycle. The \overline{W} and DATA IN should be asserted and registered in the subsequent cycle.



READ AND WRITE

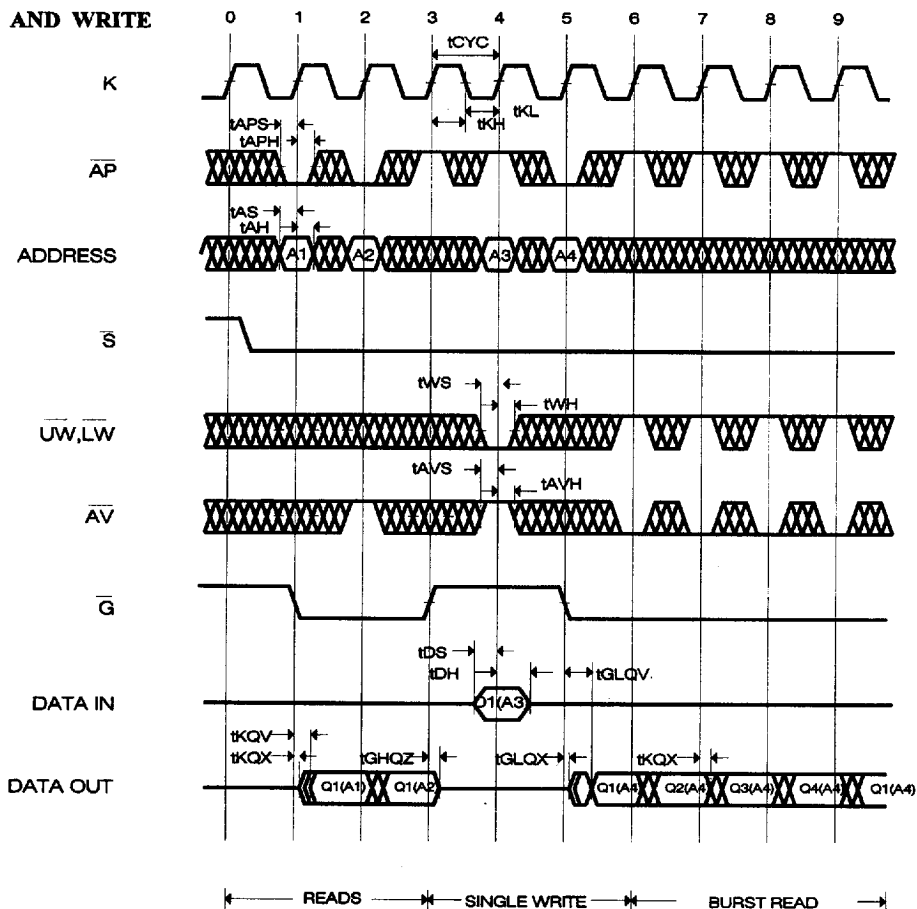

AC TEST LOAD

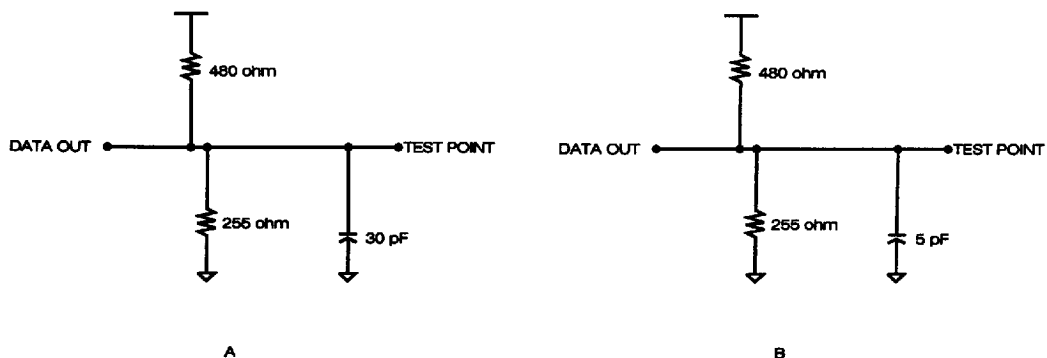

PACKAGE INFORMATION

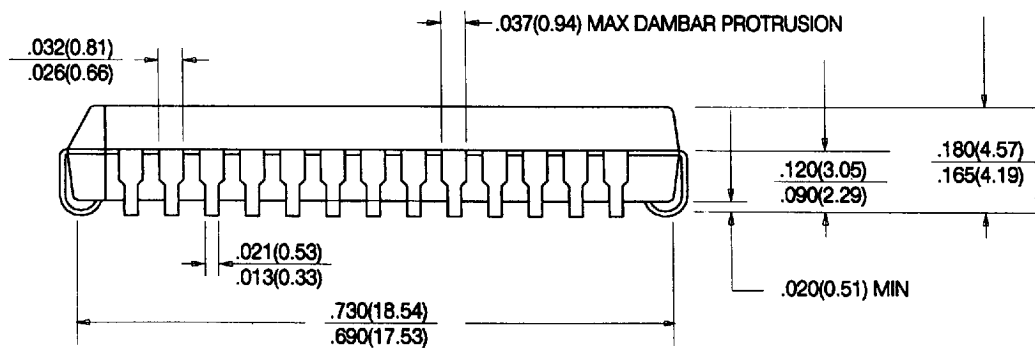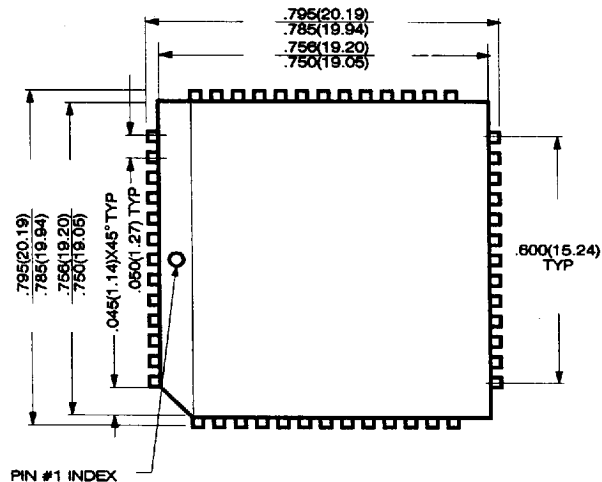

4675088 0006266 83T

ORDERING INFORMATION

PART NO.	SPEED(ns)	FEATURES	PACKAGE
HY6718110C	15/20/25	Non-Pipelined (Interleaved)	52pin PLCC
HY6718111C	15/20/25	Non-Pipelined (Linear)	52pin PLCC

■ 4675088 0006267 776 ■