



1. Dimensions:

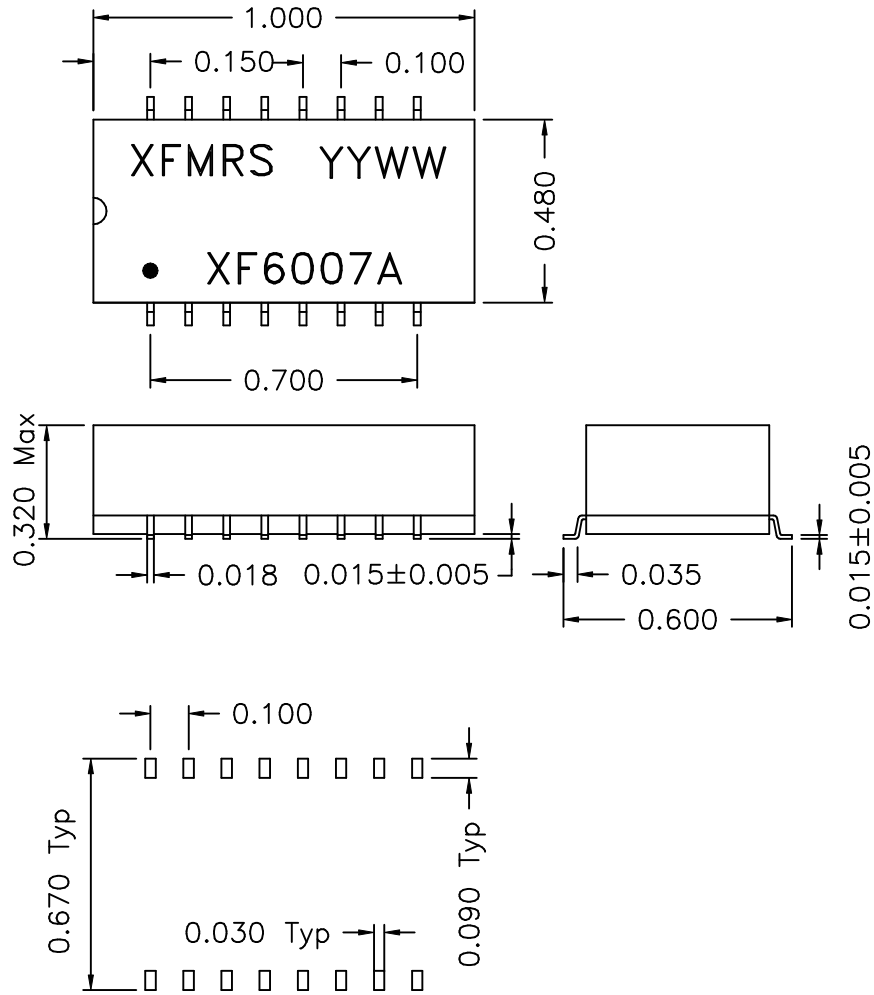

PAD LAYOUT

2. Schematic:

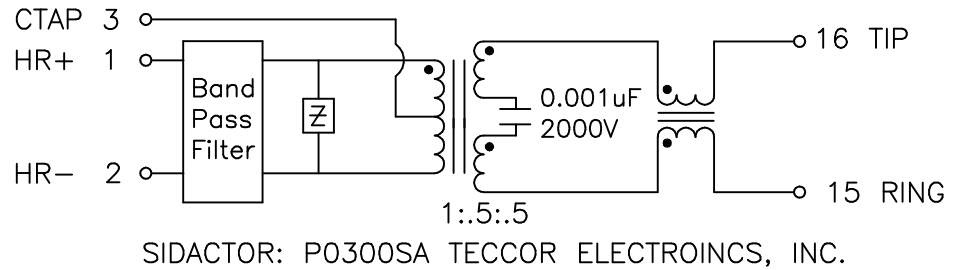

3. Electrical Specifications: @25°C

- Center Frequency: 7.5MHz
- Insertion Loss: 1.5dB Min 6 to 9MHz
- Insertion Loss: 3.0dB Max 6 to 9MHz
- Return Loss: 12dB Min 6 to 9MHz
- Attenuation @1MHz 70dB Min
- @27MHz 55dB Min
- CMRR (common mode to diff.): 50dB Min 5.5 to 9.5MHz
- line withstand voltage: 2000Vrms

DOC. REV: A/1

XFMR INC.	Title: BANDPASS FILTER								
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Inch Dimensions in Inch/mm	<table border="1" style="width: 100%;"> <tr> <td>P/N: XF6007A</td> <td>REV. A</td> </tr> <tr> <td>DWN. Buddy</td> <td>May-10-00</td> </tr> <tr> <td>CHK. Joe Huff</td> <td>May-10-00</td> </tr> <tr> <td>APP. AEI</td> <td>May-10-00</td> </tr> </table>	P/N: XF6007A	REV. A	DWN. Buddy	May-10-00	CHK. Joe Huff	May-10-00	APP. AEI
P/N: XF6007A	REV. A								
DWN. Buddy	May-10-00								
CHK. Joe Huff	May-10-00								
APP. AEI	May-10-00								
SCALE 2:1 SHT 1 OF 1									