




aptek microsystems

Hybrid Central Office Quality Receiver

DESCRIPTION

The AMS 3101 is a complete Multi-Frequency (MF) Receiver for use with either the U.S. R1 or European CCITT #5 signalling formats. It consists of six internal bandpass filters and limiters combined with a proprietary monolithic decoder. Eight outputs are provided. Six indicate the individual tones received. One indicates valid 2 of 6 code, and another indicates that an improper tone combination (single tone or more than two tones) has been received. The 3101 requires only a single 2.976 MHz crystal for proper operation. Since this crystal determines the frequency offset tolerance and the timing for detection, the receiver is unaffected by wide voltage and temperature variations.

Separate supplies are provided for the analog and digital portions of the receiver. This provides for optimum interfacing with output logic and with the analog circuitry at the input.

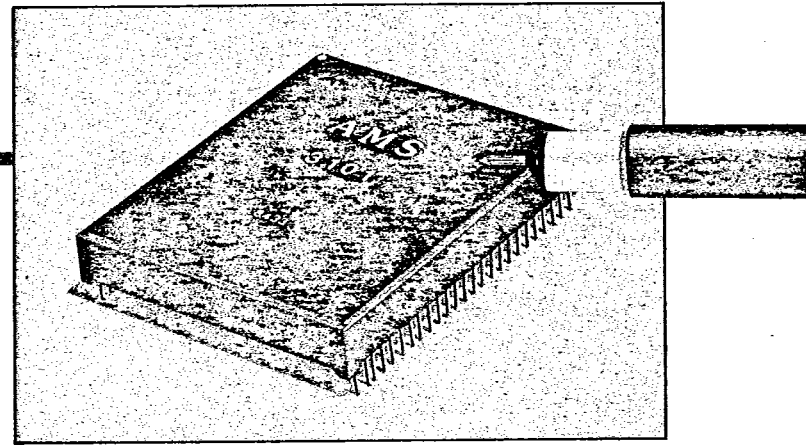


T-75-27-05

FEATURES

- Meets Bell MFR1 and CCITT #5 specifications
- Provides 2 of 6 detection
- Error Signal for Improper Codes
- Low power
- Adjustable Gain
- Requires only 2.976 MHz crystal
- Flexible power supply and interfacing requirements


BLOCK DIAGRAM

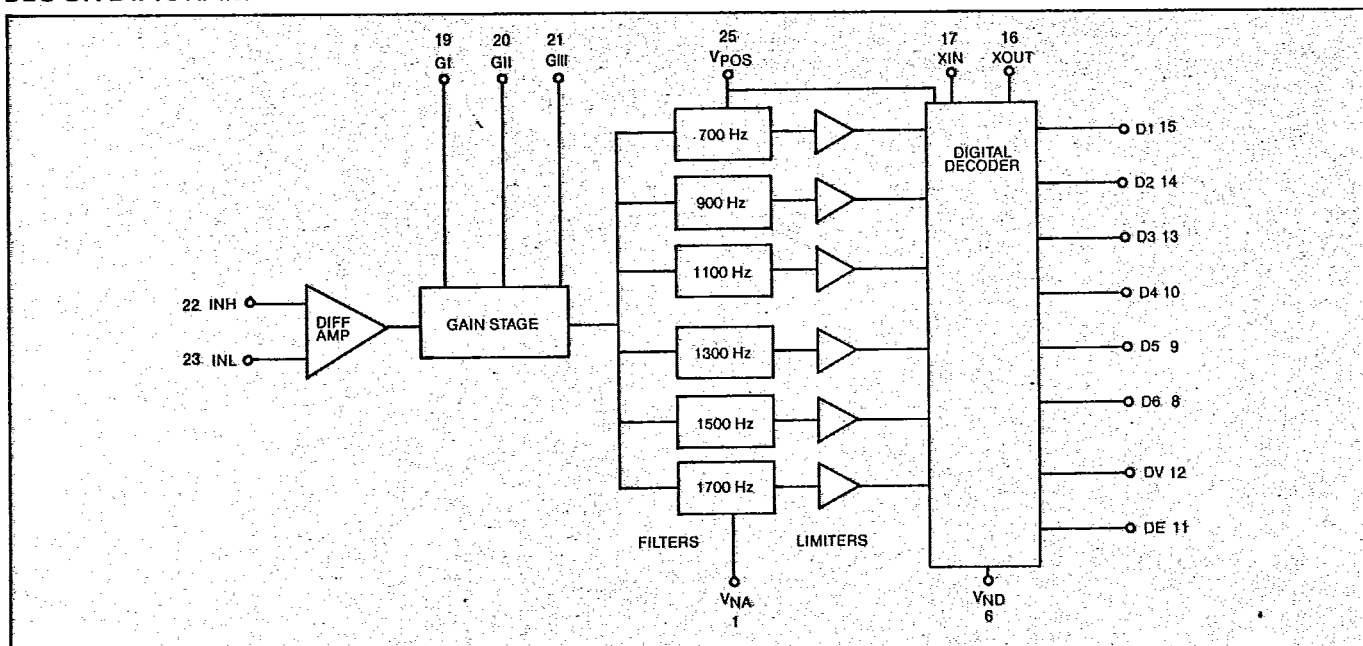

AMS 3101

Pin Description

PINOUT DRAWING

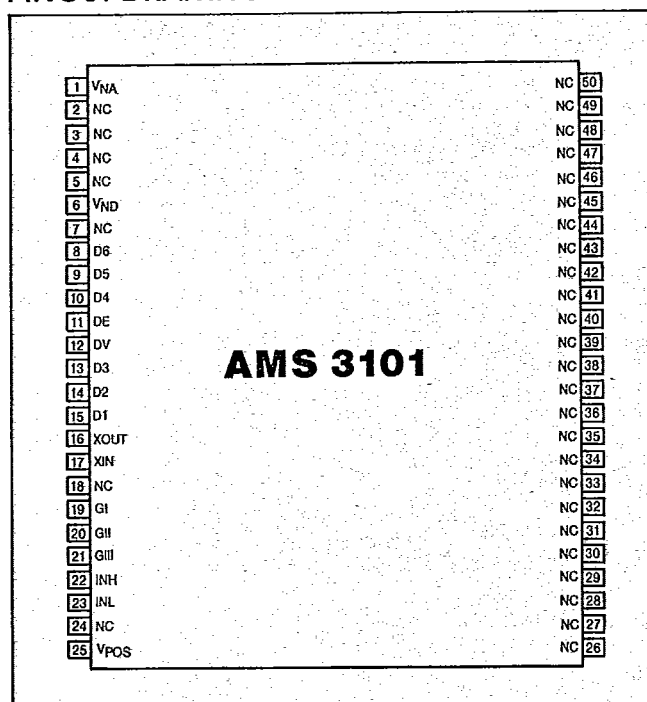

PIN	NAME	DESCRIPTION
22	INH	Input Signal High
23	INL	Input Signal Low
19	G1	Gain Adjust, Resistor from G1 to GII Increases
20	GII	Sensitivity, Resistor from GII to GIII Decreases
21	GIII	Sensitivity, GIII is Buffered Output of Signal from INH to INL
25	VPOS	Most Positive Power Supply Input
1	VNA	Negative Power Supply Input for Analog Section
6	VND	Negative Power Supply Input for Digital Section. Digital Outputs Swing from VPOS to VND. See Note 1.
15	D1	700 Hz Data Output
14	D2	900 Hz Data Output
13	D3	1100 Hz Data Output
10	D4	1300 Hz Data Output
9	D5	1500 Hz Data Output
8	D6	1700 Hz Data Output
12	DV	Data Valid Output. Indicates Valid Tone Pair has been present for minimum detection time.
11	DE	Data Error Output. Indicates presence of Invalid Tone Combination for longer than evaluation period.
17	XIN	Crystal Oscillator Input.
16	XOUT	Crystal Oscillator Output. A 2.976 MHz Parallel Resonant Crystal must be connected between XIN and XOUT for proper operation.
	NC	All other pins must not be connected.

Note 1: VND must not be more negative than VNA.

Electrical Characteristics

ABSOLUTE MAXIMUM RATINGS

(all voltages referred to V_{NA} or V_{ND}) Operation above absolute maximum ratings may permanently damage device.

Supply Voltage	+18 Volts
Operating Temperature	0°C to 70°C ambient
Storage Temperature	- 65° C TO 150° C
Power Dissipation at $T_A = 25^\circ\text{C}$ derate above $T_A = 25^\circ\text{C}$ at	750 mW 10 mW/°C
Lead Temperature (soldering, 10 sec.)	300°C

DC CHARACTERISTICS

$T_A = 0^\circ$ to 70°C . $V_{POS} = 12\text{V}$ $V_{ND} = V_{NA} = 0\text{V}$

PARAMETER	CONDITIONS	MINIMUM	MAXIMUM	UNITS
Digital Supply Voltage	$V_{POS}-V_{ND}$	4.5	13.2	Volts
Analog Supply Voltage	$V_{POS}-V_{NA}$	9	18	Volts
Supply Current			30	mA
Digital Output Drive	"0" Level, 1mA Load	V_{ND}	$V_{ND} + 0.5$	Volts
	"1" Level, 1 mA Load	$V_{POS} - 0.5$	V_{POS}	Volts


AC CHARACTERISTICS

$T_A = 0^\circ$ to 70°C . $V_{POS} = 12\text{V}$ $V_{ND} = V_{NA} = 0\text{V}$

PARAMETER	CONDITIONS	MINIMUM	MAXIMUM	UNITS
Must Operate Frequency Offset		$\pm(1.5\% + 10\text{Hz})$		
Operational Twist Adjacent Tones		8		dB
Operating Level		-30	-5	dBm
Non-Operate Level			-39	dBm
Must Detect Tone Burst		30		ms
Must Not Detect Tone Burst			10	ms
Must Detect Pause Length		25		
Must Not Detect Pause Length			10	ms
Acceptable White Noise Level	Band Limited Gaussian Noise 300-3,400 Hz		-40	dBm

AMS 3101

PACKAGE DESCRIPTION

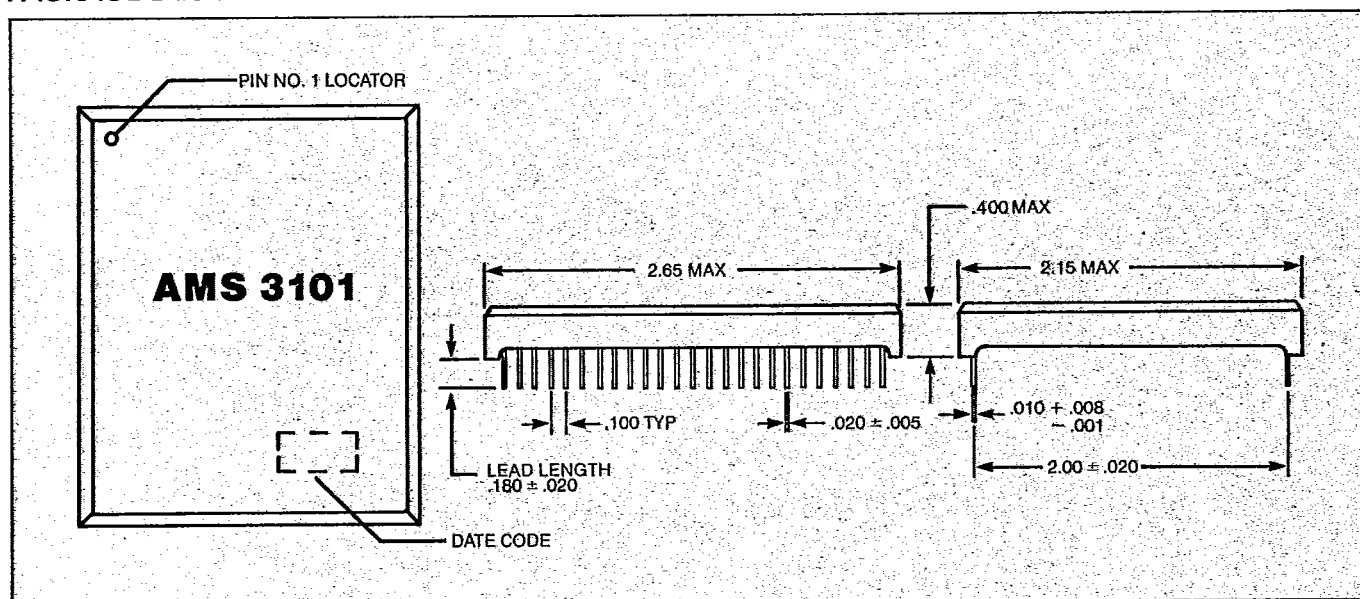

aptek microsystems

aptek technologies, inc.
 700 N.W. 12th Avenue
 Deerfield Beach, FL 33442
 Tel 305-421-8450 • Fax 305-421-8044 • Tlx 441020

Information furnished by aptek technologies, inc. is believed to be accurate and reliable. However, no responsibility is assumed by aptek technologies, inc. for its use, nor for any infringements or patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of aptek technologies, inc. aptek technologies inc. reserves the right to make changes at any time and without notice.