

DN6844S

Hall IC (Operating Supply Voltage Range V_{CC} =3.6 to 16V, Operating in Alternative Magnetic Field)

Overview

The DN6844S is an integrated circuit making use of Hall effects. It is designed particularly for operating at a low supply voltage in alternative magnetic field. It is suitable for various sensors and contactless switches.


Features

- Wide range of supply voltage : 3.6 to 16V
- Operating in alternative magnetic field
- TTL and MOS ICs directly drivable by output
- Semipermanent service life because of no contact parts
- Drivable with a small magnet
- 4-pin PANAFLAT package (SOH-4D)


Applications

- Speed sensors
- Position sensors
- Rotation sensors
- Keyboard switches
- Microswitches

Note) This IC is not suitable for car electrical equipment.

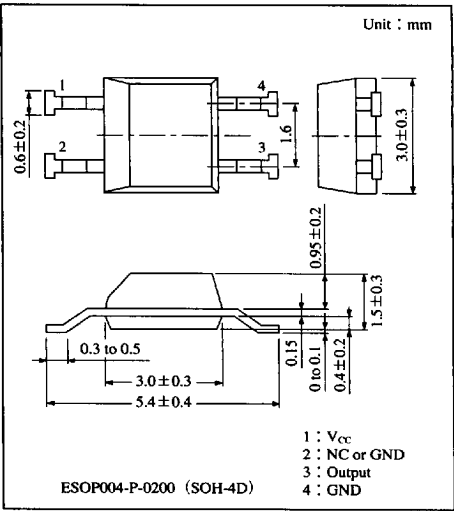

Block Diagram

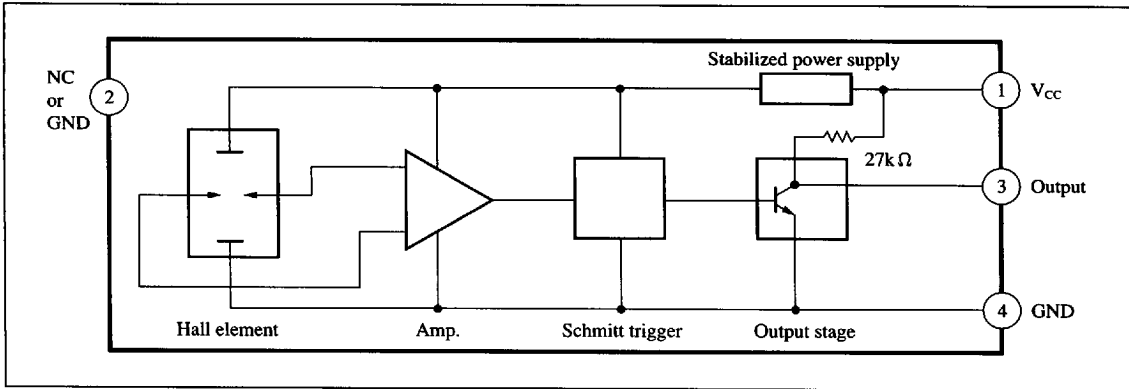

6932852 0013243 753

Panasonic

■ Absolute Maximum Ratings (Ta=25℃)


Parameter	Symbol	Rating	Unit
Supply voltage	V _{CC}	18	V
Supply current	I _{CC}	8	mA
Circuit current	I _O	20	mA
Power dissipation	P _D	100	mW
Operating ambient temperature	T _{opr}	−40 to +85	℃
Storage temperature	T _{stg}	−55 to +125	℃

■ Electrical Characteristics (Ta=25℃)


Parameter	Symbol	Condition	min	typ	max	Unit
Operating flux density	B ₁ (L to H)	V _{CC} =12V	−30	—	—	mT
	B ₂ (H to L)	V _{CC} =12V	—	—	30	mT
Low output voltage	V _{OL}	V _{CC} =16V, I _O =12mA, B=30mT	—	—	0.4	V
		V _{CC} =3.6V, I _O =12mA, B=30mT	—	—	0.4	V
High output voltage	V _{OH}	V _{CC} =16V, I _O =−30μA, B=−30mT	14.6	—	—	V
		V _{CC} =3.6V, I _O =−30μA, B=−30mT	2.2	—	—	V
Output short-circuit current	−I _{OS}	V _{CC} =16V, V _O =0V, B=−30mT	0.4	—	0.9	mA
Supply current	I _{CC}	V _{CC} =16V	—	—	6	mA
		V _{CC} =3.6V	—	—	5.5	mA

Note 1) Operating supply voltage range V_{CC} (opr) = 3.6 to 16V
Note 2) For the operating flux density, ±200 mT is also available as Rank A.

■ Hall Element Position

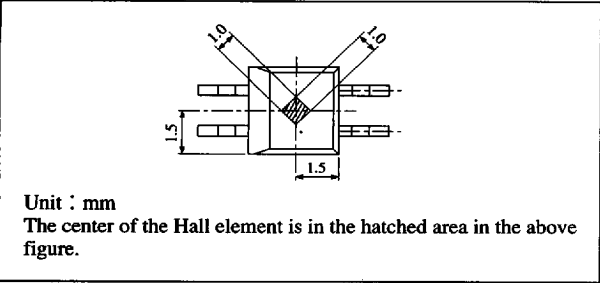

■ Flux-Voltage Conversion Characteristics

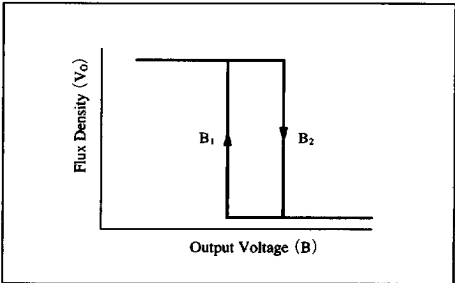

■ Precaution on Use

- 1. Change of the operation magnetic flux density dose not depend on the supply voltage, because the stabilization power supply is built-in.
(only for the range; V_{CC}=4.5 to 16V)
- 2. Change from “H” to “L” level increases the supply current by approx. 1mA.

■ 6932852 0013244 69T ■

Panasonic