




- Vertical Module Arrangement
- Snap-in Components
- Inlet Variations (with various tag sizes)
- Double Pole Switch/ Fuseholder/Indicator/ Voltage Selectors/ Blanking Plate
- Filtered Inlet Option
- Options of O/I marked switches

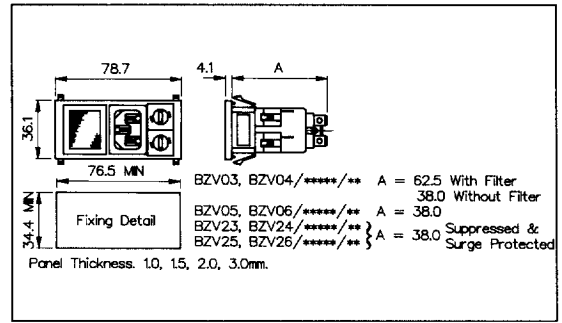

How to Order

BZV xx / xxxxx / xx

Type of Inlet / Outlet	Filtered or Non Filtered Inlet	Combination of Other Components
Power Inlet (cold condition), 6.3 or 2.8mm tabs: 03 = PX0575/63 04 = PX0575/28 Power Inlet (hot condition), 6.3 or 2.8mm tabs: 05 = PX0595/63 06 = PX0595/28 Suppressed Power Inlet (cold condition), 6.3 or 2.8mm tabs: 23 = PXS575/63 24 = PXS575/28 Surge Protected Power Inlet (cold condition), 6.3 or 2.8mm tabs: 25 = PXT575/63 26 = PXT575/28	Z0000 = Non Filtered Axxxx = Standard Bxxxx = Medical Cxxxx = High Performance Standard Dxxxx = High Performance Medical Exxxx = Earth Line Choke For Filtered inlet use 6th to 9th characters from filter ordering code see pages 75-79. E.g. BZV03/ A0120 /07	Twin Fuseholder and Double Pole Switch Marked O/I: 72 = 2 x FX0359 + D.P. Switch (O/I) Twin Fuseholder and Double Pole Neon Switch Marked O/I: 73 = 2 x FX0359 + D.P. Red Neon Switch (O/I) 75 = 2 x FX0359 + D.P. Green Neon Switch (O/I) 82 = 2 x FX0359 + D.P. Red Neon Switch 125V(O/I) Voltage Selector, Fuseholder and Double Pole Switch Marked (O/I): 79 = 1 x VS0001 + 1 x FX0359 + Double Pole switch (O/I) Voltage Selector, Fuseholder and Double Pole Neon Switch Marked (O/I): 80 = 1 x VS0001 + 1 x FX0359 + D.P. Red Neon Switch (O/I) 81 = 1 x VS0001 + 1 x FX0359 + D.P. Green Neon Switch (O/I) Twin Fuseholder and Double Pole High Inrush Switch Marked (O/I): 83 = 2 x FX0359 + D.P. High Inrush Switch (O/I) Twin Fuseholder and Double Pole High Inrush Neon Switch Marked (O/I): 84 = 2 x FX0359 + 1 x D.P. High Inrush Green Neon Switch (O/I) 85 = 2 x FX0359 + 1 x D.P. High Inrush Red Neon Switch (O/I) Voltage Selector, Neon Indicator and Double Pole Switch Marked (O/I): 86 = 1 x VS0001 + 1 x DX0928/110V/Red + D.P. Switch (O/I) 87 = 1 x VS0001 + 1 x DX0928/110V/Green + D.P. Switch (O/I) 88 = 1 x VS0001 + 1 x DX0928/250V/Red + D.P. Switch (O/I) 89 = 1 x VS0001 + 1 x DX0928/250V/Green + D.P. Switch (O/I) Voltage Selector, Neon Indicator and Double Pole High Inrush Switch Marked (O/I): 90 = 1 x VS0001 + 1 x DX0928/250V/Red + D.P. High Inrush Switch (O/I) 91 = 1 x VS0001 + 1 x DX0928/250V/Green + D.P. High Inrush Switch (O/I) Fuseholder, Neon Indicator and Double Pole Switch Marked (O/I) 92 = 1 x FX0359 + 1 x DX0928/110V/Red + D.P. Switch (O/I) 93 = 1 x FX0359 + 1 x DX0928/110V/Green + D.P. Switch (O/I) 94 = 1 x FX0359 + 1 x DX0928/250V/Red + D.P. Switch (O/I) 95 = 1 x FX0359 + 1 x DX0928/250V/Green + D.P. Switch (O/I) Fuseholder, Neon Indicator and Double Pole High Inrush Switch Marked (O/I): 96 = 1 x FX0359 + 1 x DX0928/250V/Red + D.P. High Inrush Switch (O/I) 97 = 1 x FX0359 + 1 x DX0928/250V/Green + D.P. High Inrush Switch (O/I) Fuseholder, Blanking Plate and Double Pole High Inrush Neon Switch Marked (O/I): 99 = 1 x FX0359 + 1 x Blanking Plate (Right) + D.P. High Inrush Green Neon Switch (O/I) Fuseholder, Blanking Plate and Double Pole Switch Marked (O/I): A0 = 1 x FX0359 + 1 x Blanking Plate (Right) + D.P. Switch (O/I)

Please note type 05 and 06 are not available in filtered version