



LOW-VOLTAGE PRINTED CIRCUIT PLUG-IN POWER TRANSFORMERS - MINI-ISO-MITEES


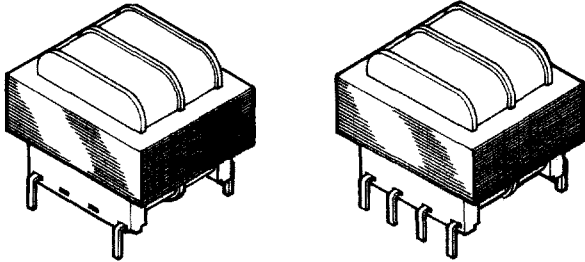


VA SIZE	Physical data in inches							WT. lbs.
	CASE H	CASE L	CASE W	MTG MW	A	B	C	
1.1	.938	1.375	1.125	---	1.200	.250	.250	.17
2.4	1.188	1.375	1.125	---	1.200	.250	.250	.25
6	1.313	1.625	1.312	1.062	1.280	.250	.350	.44
12	1.438	1.875	1.562	1.250	1.410	.300	.400	.70
20	1.438	2.250	1.875	1.500	1.600	.300	.400	.80
36	1.563	2.625	2.187	---	1.850	.400	.400	1.10

4 MTG holes 5/32 dia on 2-3/16 x 1-3/4 centers

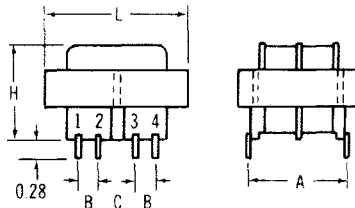

CLEARANCE HOLE

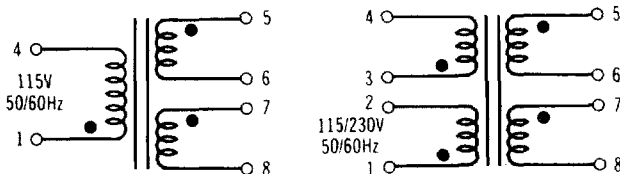

Basic 6 Pin
Single 115V

Basic 8 Pin
Dual 115/230V

PRIMARY RATINGS:

Single 115V or Dual 115V/230V, Rated 50/60 Hz.
2500 RMS Hipot
UL File Number 110331



S E C T	Part Number		VA Size	Secondary RMS Ratings	
	Single 115V	Dual 115V/230V			
				Series	Parallel
A	MIM 321	MIM 320	1.1	10V CT @ 110MA	5V @ 220MA
	MIM 323	MIM 322	1.1	12.6V CT @ 90MA	6.3V @ 180MA
	MIM 325	MIM 324	1.1	16V CT @ 70MA	8V @ 140MA
	MIM 327	MIM 326	1.1	20V CT @ 55MA	10V @ 110MA
	MIM 329	MIM 328	1.1	24V CT @ 45MA	12V @ 90MA
	MIM 331	MIM 330	1.1	28V CT @ 40MA	14V @ 80MA
	MIM 333	MIM 332	1.1	36V CT @ 30MA	18V @ 60MA
	MIM 335	MIM 334	1.1	48V CT @ 23MA	24V @ 46MA
	MIM 337	MIM 336	1.1	56V CT @ 20MA	28V @ 40MA
	MIM 339	MIM 338	1.1	120V CT @ 10MA	60V @ 20MA
B	MIM 421	MIM 420	2.4	10V CT @ 250MA	5V @ 500MA
	MIM 423	MIM 422	2.4	12.6V CT @ 200MA	6.3V @ 400MA
	MIM 425	MIM 424	2.4	16V CT @ 150MA	8V @ 300MA
	MIM 427	MIM 426	2.4	20V CT @ 120MA	10V @ 240MA
	MIM 429	MIM 428	2.4	24V CT @ 100MA	12V @ 200MA
	MIM 431	MIM 430	2.4	28V CT @ 85MA	14V @ 170MA
	MIM 433	MIM 432	2.4	36V CT @ 65MA	18V @ 130MA
	MIM 435	MIM 434	2.4	48V CT @ 50MA	24V @ 100MA
	MIM 437	MIM 436	2.4	56V CT @ 45MA	28V @ 90MA
	MIM 439	MIM 438	2.4	120V CT @ 20MA	60V @ 40MA
C	MIM 521	MIM 520	6	10V CT @ 600MA	5V @ 1.2A
	MIM 523	MIM 522	6	12.6V CT @ 500MA	6.3V @ 1.0A
	MIM 525	MIM 524	6	16V CT @ 400MA	8V @ 800MA
	MIM 527	MIM 526	6	20V CT @ 300MA	10V @ 600MA
	MIM 529	MIM 528	6	24V CT @ 250MA	12V @ 500MA
	MIM 531	MIM 530	6	28V CT @ 200MA	14V @ 400MA
	MIM 533	MIM 532	6	36V CT @ 170MA	18V @ 340MA
	MIM 535	MIM 534	6	48V CT @ 125MA	24V @ 250MA
	MIM 537	MIM 536	6	56V CT @ 110MA	28V @ 220MA
	MIM 539	MIM 538	6	120V CT @ 50MA	60V @ 100MA
D	MIM 621	MIM 620	12	10V CT @ 1.2A	5V @ 2.4A
	MIM 623	MIM 622	12	12.6V CT @ 1.0A	6.3V @ 2.0A
	MIM 625	MIM 624	12	16V CT @ 800MA	8V @ 1.6A
	MIM 627	MIM 626	12	20V CT @ 600MA	10V @ 1.2A
	MIM 629	MIM 628	12	24V CT @ 500MA	12V @ 1.0A
	MIM 631	MIM 630	12	28V CT @ 420MA	14V @ 840MA
	MIM 633	MIM 632	12	36V CT @ 350MA	18V @ 700MA
	MIM 635	MIM 634	12	48V CT @ 250MA	24V @ 500MA
	MIM 637	MIM 636	12	56V CT @ 220MA	28V @ 440MA
	MIM 639	MIM 638	12	120V CT @ 100MA	60V @ 200MA
E	MIM 720	MIM 721	20	10V CT @ 2.0A	5V @ 4.0A
	MIM 722	MIM 723	20	12.6V CT @ 1.6A	6.3V @ 3.2A
	MIM 724	MIM 725	20	16V CT @ 1.25A	8V @ 2.5A
	MIM 726	MIM 727	20	20V CT @ 1.0A	10V @ 2.0A
	MIM 728	MIM 729	20	24V CT @ 800MA	12V @ 1.6A
	MIM 730	MIM 731	20	28V CT @ 700MA	14V @ 1.4A
	MIM 732	MIM 733	20	36V CT @ 550MA	18V @ 1.1A
	MIM 734	MIM 735	20	48V CT @ 400MA	24V @ 800MA
	MIM 736	MIM 737	20	56V CT @ 350MA	28V @ 700MA
	MIM 738	MIM 739	20	120V CT @ 160MA	60V @ 320MA
F	MIM 820	MIM 821	36	10V CT @ 3.6A	5V @ 7.20A
	MIM 822	MIM 823	36	12.6V CT @ 2.85A	6.3V @ 5.7A
	MIM 824	MIM 825	36	16V CT @ 2.25A	8V @ 4.5A
	MIM 826	MIM 827	36	20V CT @ 1.8A	10V @ 3.6A
	MIM 828	MIM 829	36	24V CT @ 1.5A	12V @ 3.0A
	MIM 830	MIM 831	36	28V CT @ 1.3A	14V @ 2.6A
	MIM 832	MIM 833	36	36V CT @ 1.0A	18V @ 2.0A
	MIM 834	MIM 835	36	48V CT @ 750MA	24V @ 1.5A
	MIM 836	MIM 837	36	56V CT @ 650MA	28V @ 1.3A
	MIM 838	MIM 839	36	120V CT @ 300MA	60V @ 600MA