

ELPIDA**MOS INTEGRATED CIRCUIT** **μ PD45D128442, 45D128842, 45D128164****128 M-bit Synchronous DRAM with Double Data Rate
(4-bank, SSTL_2)****Description**

The μ PD45D128442, 45D128842, 45D128164 are high-speed 134,217,728 bits synchronous dynamic random-access memories, organized as 8,388,608x4x4, 4,194,304x8x4, 2,097,152x16x4 (word x bit x bank), respectively.

The synchronous DRAMs use Double Data Rate (DDR) where data bandwidth is twice of regular synchronous DRAM.

The synchronous DRAM is compatible with SSTL_2 (Stub Series terminated Logic for 2.5 V).

The synchronous DRAM is packaged in 66-pin Plastic TSOP (II).

Features

- Fully Synchronous Dynamic RAM with all input signals except DM, DQS and DQ referenced to a positive clock edge
- Double Data Rate interface
 - Differential CLK (/CLK) input
 - Data inputs and DM are synchronized with both edges of DQS
 - Data outputs and DQS are synchronized with a cross point of CLK and /CLK
- Quad internal banks operation
- Possible to assert random column address in every clock cycle
- Programmable Mode register set
 - /CAS latency (2, 2.5)
 - Burst length (2, 4, 8)
 - Wrap sequence (Sequential / Interleave)
- Automatic precharge and controlled precharge
- CBR (Auto) refresh and self refresh
- x4, x8, x16 organization
- Byte write control (x4, x8) by DM
- Byte write control (x16) by LDM and UDM
- 2.5 V $\pm$ 0.2 V Power supply for V_{DD}
- 2.5 V $\pm$ 0.2 V Power supply for V_{DDQ}
- Maximum clock frequency up to 133 MHz
- SSTL_2 compatible with all signals
- 4,096 refresh cycles/64 ms
- 66-pin Plastic TSOP (II) (10.16 mm (400))
- Burst termination by Precharge command and Burst stop command

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.
Not all devices/types available in every country. Please check with local Elpida Memory, Inc. for availability and additional information.


Ordering Information

Part Number	Organization (word x bit x bank)	Clock frequency MHz (MAX.)	Package
μPD45D128442G5-C75-9LG	8M x 4 x 4	133	66-pin Plastic TSOP (II) (10.16 mm (400))
μPD45D128442G5-C80-9LG		125	
μPD45D128842G5-C75-9LG	4M x 8 x 4	133	
μPD45D128842G5-C80-9LG		125	
μPD45D128164G5-C75-9LG	2M x 16 x 4	133	
μPD45D128164G5-C80-9LG		125	

Part Number


[x4, x8]

μPD45D128 842 G5 - C80

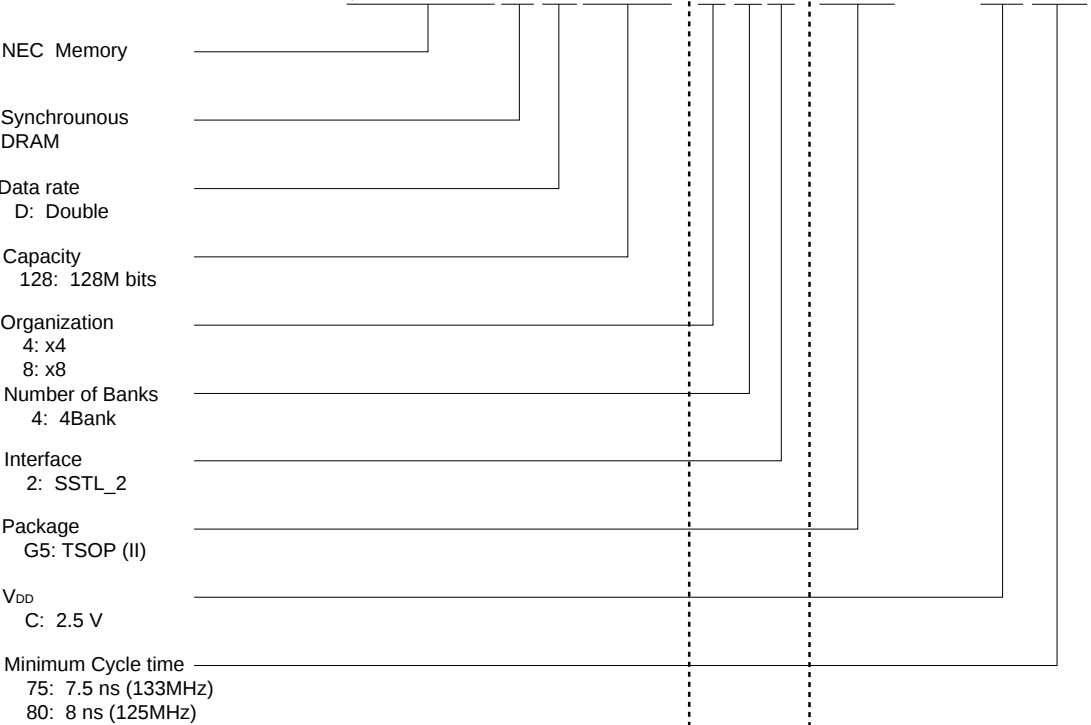

[x16]

164

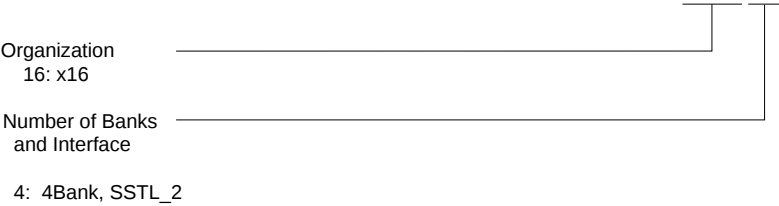


Pin Configurations

/xxx indicates active low signal.

[μ PD45D128442]

66-pin Plastic TSOP (II) (10.16 mm (400))

8M word x 4 bit x 4 bank

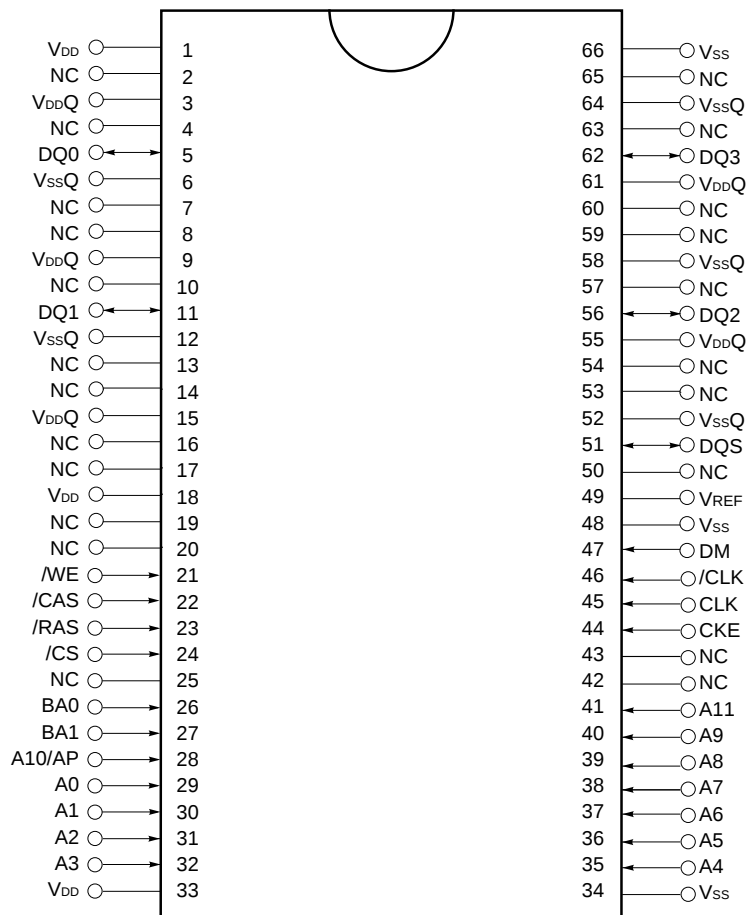


A0 - A11 : Address inputs
 A0 - A11 : Row address inputs
 A0 - A9, A11 : Column address inputs
 BA0, BA1 : Bank select
 DQ0 - DQ3 : Data inputs/outputs
 DQS : Data strobe
 CLK, /CLK : System clock input
 CKE : Clock enable
 /CS : Chip select
 /RAS : Row address strobe

/CAS : Column address strobe
 /WE : Write enable
 DM : DQ write mask enable
 VDD : Supply voltage
 VSS : Ground
 VDDQ : Supply voltage for DQ and DQS
 VSSQ : Ground for DQ and DQS
 VREF : Input reference
 NC : No connection

[μ PD45D128842]

66-pin Plastic TSOP (II) (10.16 mm (400))

4M word x 8 bit x 4 bank

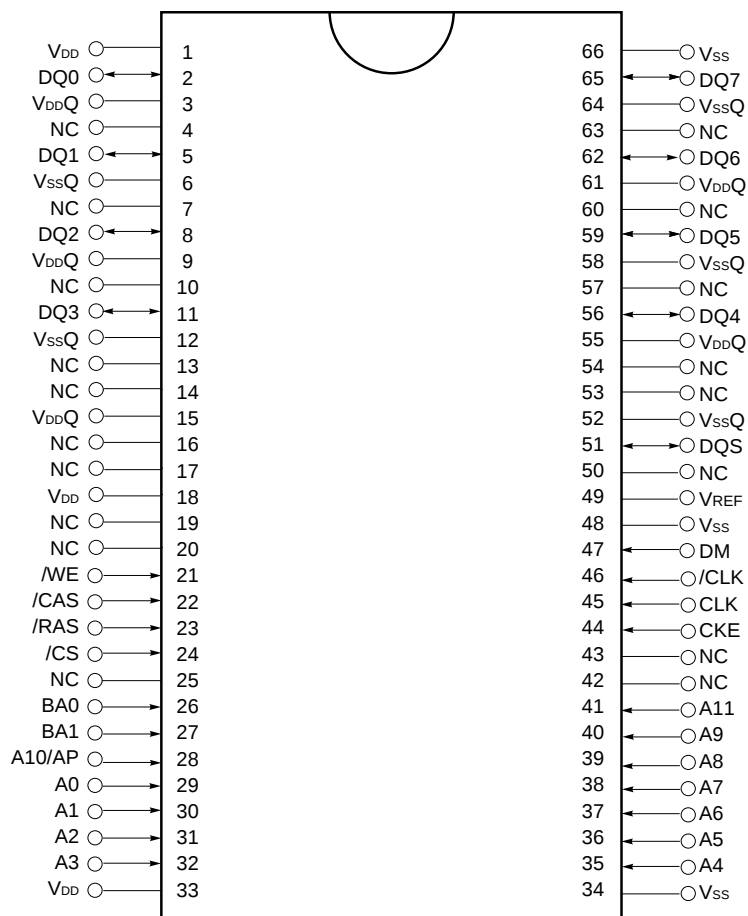


A0 - A11 : Address inputs
 A0 - A11 : Row address inputs
 A0 - A9 : Column address inputs
 BA0, BA1 : Bank select
 DQ0 - DQ7 : Data inputs/outputs
 DQS : Data strobe
 CLK, /CLK : System clock input
 CKE : Clock enable
 /CS : Chip select
 /RAS : Row address strobe

/CAS : Column address strobe
 /WE : Write enable
 DM : DQ write mask enable
 VDD : Supply voltage
 VSS : Ground
 VDDQ : Supply voltage for DQ and DQS
 VSSQ : Ground for DQ and DQS
 VREF : Input reference
 NC : No connection

[μ PD45D128164]

66-pin Plastic TSOP (II) (10.16 mm (400))


2M word x 16bit x 4 bank

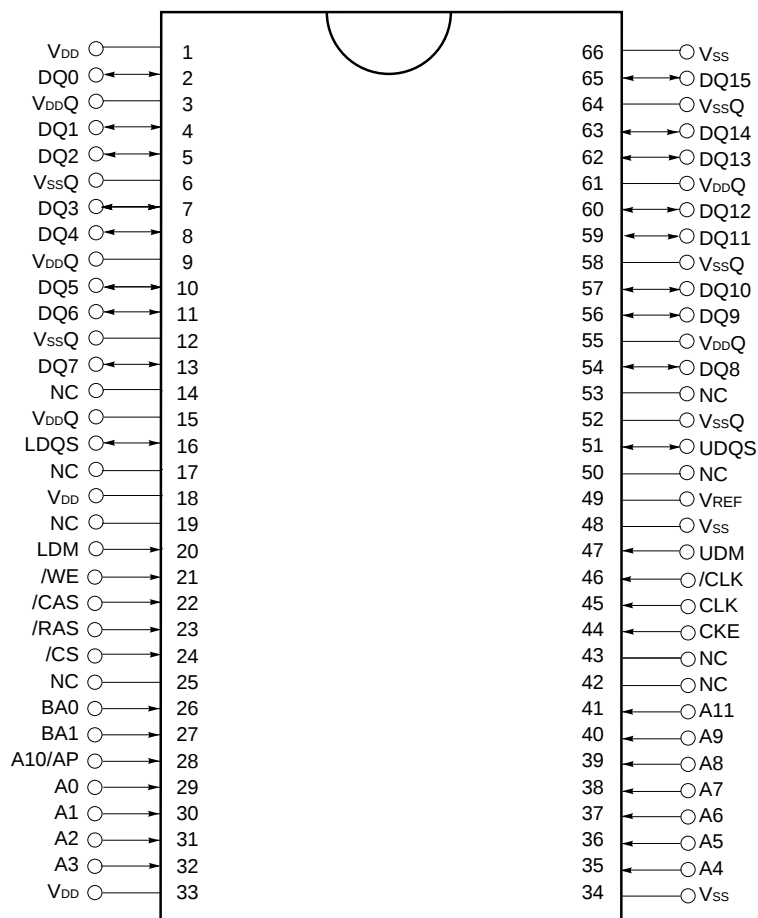

A0 - A11 : Address inputs
 A0 - A11 : Row address inputs
 A0 - A8 : Column address inputs
 BA0, BA1 : Bank select
 DQ0 - DQ15 : Data inputs/outputs
 LDQS, UDQS : Data strobe
 CLK, /CLK : System clock input
 CKE : Clock enable
 /CS : Chip select
 /RAS : Row address strobe

/CAS : Column address strobe
 /WE : Write enable
 LDM, UDM : DQ write mask enable
 V_{DD} : Supply voltage
 V_{SS} : Ground
 V_{DDQ} : Supply voltage for DQ, LDQS and UDQS
 V_{SSQ} : Ground for DQ, LDQS and UDQS
 V_{REF} : Input reference
 NC : No connection

Block Diagram

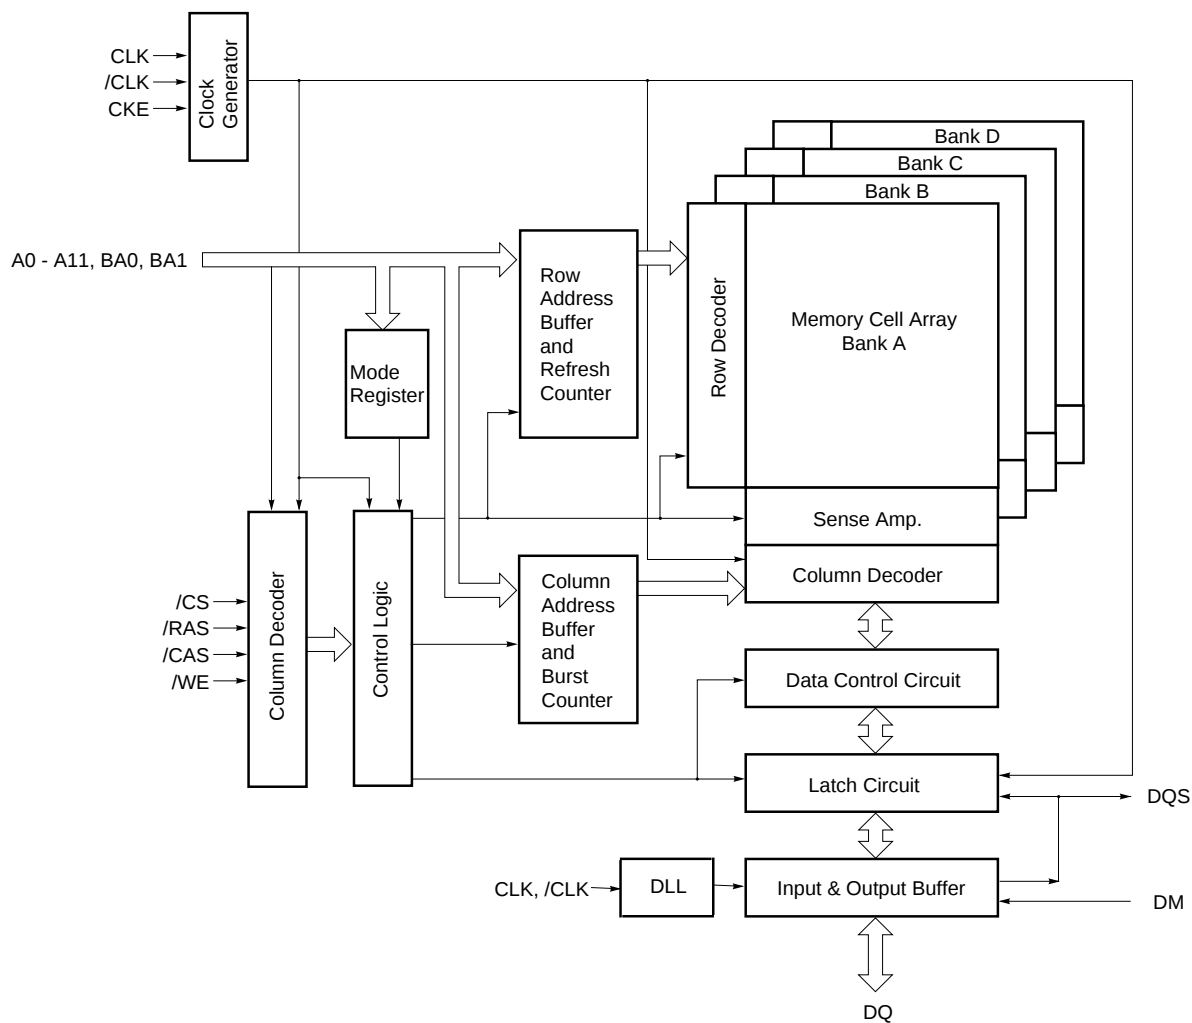

CONTENTS

1. Input/Output Pin Function ...	10
2. Commands ...	11
3. Simplified State Diagram ...	15
4. Truth Table ...	16
4.1 Command Truth Table ...	16
4.2 DM Truth Table ...	16
4.3 CKE Truth Table ...	16
4.4 Operative Command Table ...	17
4.5 Command Truth Table for CKE ...	20
5. Initialization ...	21
6. Programming the Mode Register ...	22
7. Mode Register ...	23
7.1 Burst Length and Sequence ...	24
8. Address Bits of Bank-Select and Precharge ...	25
9. Precharge ...	26
9.1 Read to Precharge Command Interval ...	26
9.2 Write to Precharge Command Interval ...	27
10. Auto Precharge ...	28
10.1 Read with Auto Precharge ...	28
10.2 Write with Auto Precharge ...	29
11. Read/Write Command Interval ...	30
11.1 Read to Read Command Interval ...	30
11.2 Write to Write Command Interval ...	31
11.3 Write to Read Command Interval ...	32
11.4 Read to Write Command Interval ...	33

12. Burst Termination ... 34

- 12.1 Burst Stop Command in Read Cycle ... 34
- 12.2 Precharge Termination in Read Cycle ... 35
- 12.3 Precharge Termination in Write Cycle ... 36

13. Electrical Specifications ... 37

- 13.1 Absolute Maximum Ratings ... 37
- 13.2 Recommended Operating Conditions ... 37
- 13.3 Pin Capacitance (TA = 25 °C, f = 1 MHz) ... 37
- 13.4 DC Characteristics 1 (Recommended Operating Conditions unless otherwise noted) ... 38
- 13.5 DC Characteristics 2 (Recommended Operating Conditions unless otherwise noted) ... 38
- 13.6 AC Characteristics (Recommended Operating Conditions unless otherwise noted) ... 39
 - 13.6.1 Test Conditions ... 39
 - 13.6.2 Timing Diagram ... 40
 - 13.6.3 Synchronous Characteristics ... 41
 - 13.6.4 Synchronous Characteristics Example ... 42
 - 13.6.5 Asynchronous Characteristics ... 42

14. Package Drawing ... 74**15. Recommended Soldering Conditions ... 75****16. Revision History ... 76**

1. Input/Output Pin Function

Pin name	Input/Output	Function
CLK, /CLK	Input	CLK and /CLK are the master clock inputs. The timing reference point for the differential clock is when CLK and /CLK cross. All control and address inputs except for DQ and DM are latched by a rising edge of CLK. By both of rising and falling edges of CLK, output DQ and DQS are validated.
CKE	Input	CKE controls power down mode. When the μ PD45D128xxx is not in burst mode and CKE is negated, the device enters power down mode and deactivates internal clock signals, input buffers and output drivers. During power down mode, CKE must remain low.
/CS	Input	/CS low starts a command input cycle. When /CS is high, commands are ignored but the current operations will be continued.
/RAS, /CAS, /WE	Input	As well as regular SDRAMs, each combination of /RAS, /CAS, and /WE input in conjunction with /CS input at a rising edge of CLK determines SDRAM operation. Refer to the command table.
A0 – A11	Input	Row address is determined by A0 - A11 at the rising edge of CLK in active command cycle. It does not depend on the bit organization. Column address is determined by A0 - A9, A11 at the rising edge of CLK in read or write command cycle. It depends on the bit organization: A0 - A9, A11 for x4 device, A0 - A9 for x8 device, A0 - A8 for x16 device. A10 defines precharge mode. When A10 is high in precharge command cycle, all banks are precharged; when A10 is low, only the bank selected by BA0 and BA1 is precharged. When A10 is high in read or write command cycle, precharge starts automatically after the burst access.
BA0, BA1	Input	BA0, BA1 are bank select signals. In command cycle, BA0 and BA1 low select Bank A, BA0 high and BA1 low select bank B, BA0 low and BA1 high select bank C and then BA0 and BA1 high select bank D.
DQ0 – DQ15	Input/Output	DQ pins have the same function as I/O pins on conventional DRAMs.
DQS, LDQS, UDQS	Input/Output	Active on the both edges for data input and output.
DM, LDM, UDM	Input	DM's are latched by both of rising and falling edges of the DQS. In write mode, DM's control byte mask. Unlike regular SDRAMs, DM's do not control read operation.
V _{REF}	Input	V _{REF} is reference voltage for SSTL input buffers.
V _{DD} , V _{DDQ} , V _{SS} , V _{SSQ}	(Power Supply)	V _{DD} and V _{SS} are power supply pins for internal circuits. V _{DDQ} and V _{SSQ} are power supply pins for the output buffers.

2. Commands

Extended mode register set command

(/CS, /RAS, /CAS, /WE Low)


The μPD45D128xxx has an extended mode register that defines enabling or disabling DLL. In this command, A0 through A11, BA0 and BA1 are the data input pins.

After power on, the extended mode register set command must be executed to enabling or disabling DLL.

The extended mode register can be set only when all banks are in idle state.

During t_{MRD} , the μPD45D128xxx can not accept any other commands.

Fig.1 Extended mode register set command

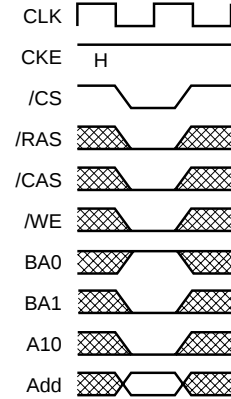

Mode register set command

(/CS, /RAS, /CAS, /WE Low)

The μPD45D128xxx has a mode register that defines how the device operates.


In this command, A0 through A11, BA0 and BA1 are the data input pins.

After power on, the mode register set command must be executed to initialize the device.

The mode register can be set only when all banks are in idle state.

During t_{MRD} , the μPD45D128xxx can not accept any other commands.

Fig.2 Mode register set command

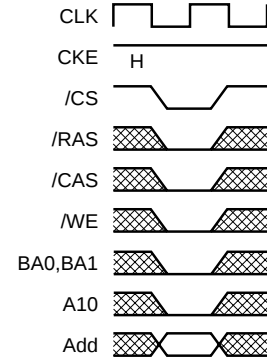

Bank activate command


(/CS, /RAS = Low, /CAS, /WE = High)

The μPD45D128xxx has four banks, each with 4,096 rows.

This command activates the bank and the row address selected by BA0 and BA1, and by A0 through A11 respectively.

This command corresponds to a conventional DRAM's /RAS falling.

Fig.3 Bank activate command

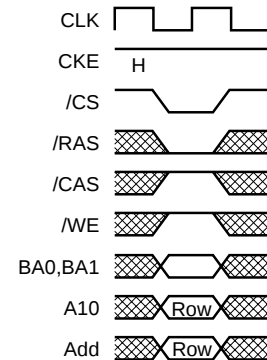

Precharge command

(/CS, /RAS, /WE = Low, /CAS = High)


This command begins precharge operation of the bank selected by BA0, BA1 and A10. When A10 is High, all banks are precharged, regardless of BA0 and BA1.

When A10 is Low, only the bank selected by BA0 and BA1 is precharged.

After this command, the μ PD45D128xxx can't accept the activate command to the precharging bank during t_{RP} (precharge to activate command period).

This command can terminate the current burst operation.

This command corresponds to a conventional DRAM's /RAS rising.

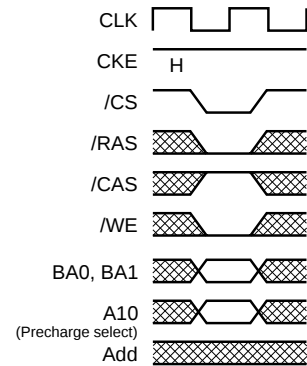
Fig.4 Precharge command**Read command**

(/CS, /CAS = Low, /RAS, /WE = High)

This command begins the burst read operation. The bank and the burst start column address are selected by BA0 and BA1 and by A0 through A11 respectively.

Read data is available after /CAS latency requirements which have been met.


And it is synchronized with DQS.

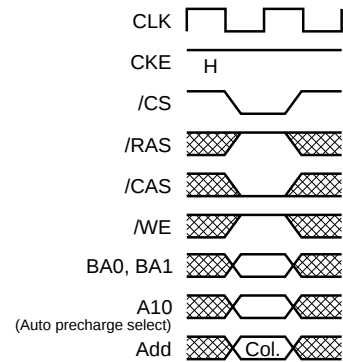Fig.5 Read command**Write command**

(/CS, /CAS, /WE = Low, /RAS = High)

This command begins burst write operation. The bank and the burst start column address are selected by BA0 and BA1 and by A0 through A11 respectively.

Write data must be input by DQ0 through DQ15. Byte mask data must be input by DM, LDM, and UDM. Both data must be synchronized with DQS that is inputted after this command.

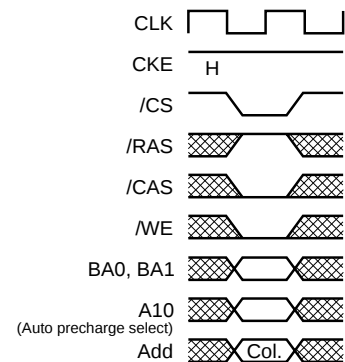Fig.6 Write command

CBR (auto) refresh command

(/CS, /RAS, /CAS = Low, /WE, CKE = High)

This command is a request to begin the CBR (auto) refresh operation.


The refresh address is generated internally.

Before executing CBR (auto) refresh, all banks must be precharged.

After this cycle, all banks will be in the idle (precharged) state and ready for a bank activate command.

During t_{RFC} (refresh command to refresh or activate command period), the μPD45D128xxx cannot accept any other command.

Fig.7 CBR (auto) refresh command

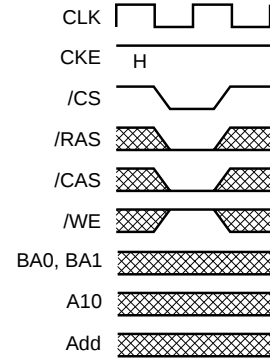

Self refresh entry command

(/CS, /RAS, /CAS, CKE = Low, /WE = High)


After the command execution, self refresh operation continues while CKE remains low.

When CKE goes high, the μPD45D128xxx will exit the self refresh mode.

During self refresh mode, refresh interval and refresh operation are performed internally, so there is no need for external control.

Before executing self refresh, all banks must be precharged.

Fig.8 Self refresh entry command

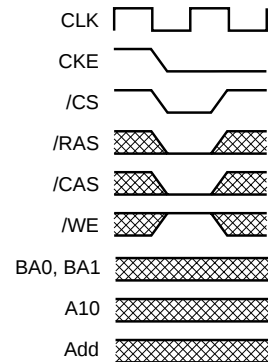


Burst stop command

(/CS, /WE = Low, /RAS, /CAS = High)

This command can stop the current read burst operation.

Fig.9 Burst stop command

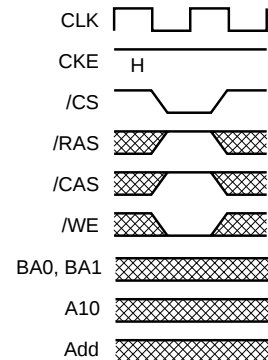


No operation

(/CS = Low, /RAS, /CAS, /WE = High)



This command is not an execution command.

This command doesn't begin or terminate any operation.

Fig.10 No operation

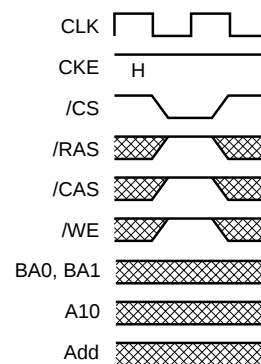

3. Simplified State Diagram

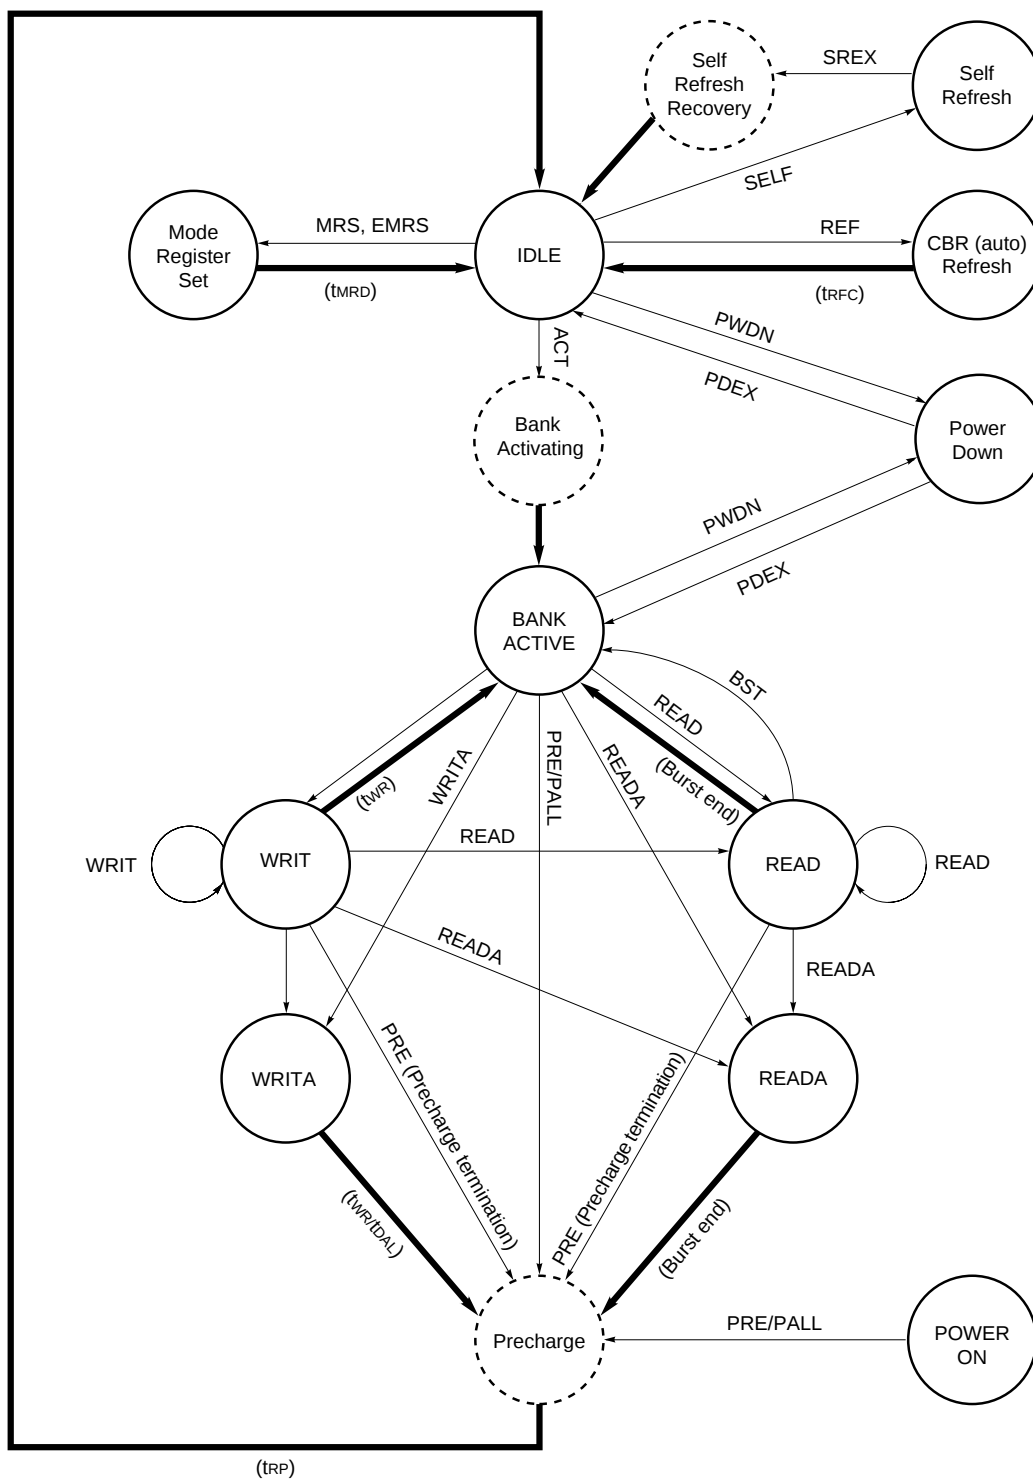

4. Truth Table

4.1 Command Truth Table

Function	Symbol	CKE		/CS	/RAS	/CAS	/WE	Address			
		n-1	n					BA0	BA1	A10	A0-9,A11
Device deselect	DESL	H	x	H	x	x	x	x		x	x
No operation	NOP	H	x	L	H	H	H	x		x	x
Burst stop	BST	H	x	L	H	H	L	x		x	x
Read	READ	H	x	L	H	L	H	V		L	V
Read with auto precharge	READA									H	
Write	WRIT	H	x	L	H	L	L	V		L	V
Write with auto precharge	WRITA									H	
Bank active	ACT	H	x	L	L	H	H	V			
Precharge select bank	PRE	H	x	L	L	H	L	V		L	x
Precharge all banks	PALL							x		H	x
Mode register set	MRS	H	x	L	L	L	L	L	L	L	V
Extended mode register set	EMRS							H	L	L	V

4.2 DM Truth Table

Function	Symbol	CKE		DM	
		n-1	n	U	L
Data write enable	ENB	H	x	L	
Data mask	MASK	H	x	H	
Upper byte write enable	ENBU	H	x	L	x
Lower byte write enable	ENBL	H	x	x	L
Upper byte write inhibit	MASKU	H	x	H	x
Lower byte write inhibit	MASKL	H	x	x	H

4.3 CKE Truth Table

Current State	Function	Symbol	CKE		/CS	/RAS	/CAS	/WE	Address
			n-1	n					
Idle	CBR (auto) refresh command	REF	H	H	L	L	L	H	x
Idle	Self refresh entry	SELF	H	L					
Self refresh	Self refresh exit	SREX	L	H	H	x	x	x	x
					L	H	H	x	x
Idle	Power down entry	PWDN	H	L	H	x	x	x	x
					L	H	H	x	x
Bank(s) active	Power down entry	PWDN	H	L	H	x	x	x	x
					L	H	H	x	x
Power down	Power down exit	PDEX	L	H	H	x	x	x	x
					L	H	H	x	x

Remark H = High level, L = Low level, V = Valid, x = High or Low level (Don't care)

4.4 Operative Command Table ^{Note1}

(1/3)

Current state	/CS	/RAS	/CAS	/WE	Address	Command	Action	Notes
Idle	H	x	x	x	x	DESL	Nop or Power down	
	L	H	H	H	x	NOP	Nop or Power down	
	L	H	H	L	x	BST	ILLEGAL	2
	L	H	L	H	BA, CA, A10	READ/READA	ILLEGAL	2
	L	H	L	L	BA, CA, A10	WRIT/WRITA	ILLEGAL	2
	L	L	H	H	BA, RA	ACT	Bank activating	
	L	L	H	L	BA, A10	PRE/PALL	Nop	3
	L	L	L	H	x	REF/SELF	CBR (auto) refresh or Self refresh	4
	L	L	L	L	Op-Code	MRS	Mode register set	4
	L	L	L	L	Op-Code	EMRS	Extended mode register set	4
Row active	H	x	x	x	x	DESL	Nop	
	L	H	H	H	x	NOP	Nop	
	L	H	H	L	x	BST	ILLEGAL	2
	L	H	L	H	BA, CA, A10	READ/READA	Begin read/read with AP	
	L	H	L	L	BA, CA, A10	WRIT/WRITA	Begin write/write with AP	
	L	L	H	H	BA, RA	ACT	ILLEGAL	2
	L	L	H	L	BA, A10	PRE/PALL	Precharge/Precharge all banks	5
	L	L	L	H	x	REF/SELF	ILLEGAL	
	L	L	L	L	Op-Code	MRS	ILLEGAL	
	L	L	L	L	Op-Code	EMRS	ILLEGAL	
Read	H	x	x	x	x	DESL	Nop (Row active after burst end)	
	L	H	H	H	x	NOP	Nop (Row active after burst end)	
	L	H	H	L	x	BST	terminate burst, Row active	6
	L	H	L	H	BA, CA, A10	READ/READA	terminate burst, Begin new read/ read with AP	6
	L	H	L	L	BA, CA, A10	WRIT/WRITA	ILLEGAL	
	L	L	H	H	BA, RA	ACT	ILLEGAL	2
	L	L	H	L	BA, A10	PRE/PALL	terminate burst, Precharge/Precharge all banks	6
	L	L	L	H	x	REF/SELF	ILLEGAL	
	L	L	L	L	Op-Code	MRS	ILLEGAL	
	L	L	L	L	Op-Code	EMRS	ILLEGAL	
Write	H	x	x	x	x	DESL	Nop (Row active after twr)	
	L	H	H	H	x	NOP	Nop (Row active after twr)	
	L	H	H	L	x	BST	ILLEGAL	
	L	H	L	H	BA, CA, A10	READ/READA	terminate burst, Begin read/read with AP	6
	L	H	L	L	BA, CA, A10	WRIT/WRITA	terminate burst, Begin new write/ write with AP	6
	L	L	H	H	BA, RA	ACT	ILLEGAL	2
	L	L	H	L	BA, A10	PRE/PALL	terminate burst, Precharge/Precharge all banks	6
	L	L	L	H	x	REF/SELF	ILLEGAL	
	L	L	L	L	Op-Code	MRS	ILLEGAL	
	L	L	L	L	Op-Code	EMRS	ILLEGAL	

(2/3)

Current state	/CS	/RAS	/CAS	/WE	Address	Command	Action	Notes
Read with auto precharge	H	x	x	x	x	DESL	Nop (Precharge after burst end)	
	L	H	H	H	x	NOP	Nop (Precharge after burst end)	
	L	H	H	L	x	BST	ILLEGAL	
	L	H	L	H	BA, CA, A10	READ/READA	ILLEGAL	
	L	H	L	L	BA, CA, A10	WRIT/WRITA	ILLEGAL	
	L	L	H	H	BA, RA	ACT	ILLEGAL	2
	L	L	H	L	BA, A10	PRE/PALL	ILLEGAL	2
	L	L	L	H	x	REF/SELF	ILLEGAL	
	L	L	L	L	Op-Code	MRS	ILLEGAL	
	L	L	L	L	Op-Code	EMRS	ILLEGAL	
Write with auto precharge	H	x	x	x	x	DESL	Nop (Idle after t _{DAL})	
	L	H	H	H	x	NOP	Nop (Idle after t _{DAL})	
	L	H	H	L	x	BST	ILLEGAL	
	L	H	L	H	BA, CA, A10	READ/READA	ILLEGAL	
	L	H	L	L	BA, CA, A10	WRIT/WRITA	ILLEGAL	
	L	L	H	H	BA, RA	ACT	ILLEGAL	2
	L	L	H	L	BA, A10	PRE/PALL	ILLEGAL	2
	L	L	L	H	x	REF/SELF	ILLEGAL	
	L	L	L	L	Op-Code	MRS	ILLEGAL	
	L	L	L	L	Op-Code	EMRS	ILLEGAL	
Precharge	H	x	x	x	x	DESL	Nop (Idle after t _{RP})	
	L	H	H	H	x	NOP	Nop (Idle after t _{RP})	
	L	H	H	L	x	BST	ILLEGAL	2
	L	H	L	H	BA, CA, A10	READ/READA	ILLEGAL	2
	L	H	L	L	BA, CA, A10	WRIT/WRITA	ILLEGAL	2
	L	L	H	H	BA, RA	ACT	ILLEGAL	2
	L	L	H	L	BA, A10	PRE/PALL	Nop (Idle after t _{RP})	3
	L	L	L	H	x	REF/SELF	ILLEGAL	
	L	L	L	L	Op-Code	MRS	ILLEGAL	
	L	L	L	L	Op-Code	EMRS	ILLEGAL	
Row activating	H	x	x	x	x	DESL	Nop (Row active after t _{RCD})	
	L	H	H	H	x	NOP	Nop (Row active after t _{RCD})	
	L	H	H	L	x	BST	ILLEGAL	2
	L	H	L	H	BA, CA, A10	READ/READA	ILLEGAL	2
	L	H	L	L	BA, CA, A10	WRIT/WRITA	ILLEGAL	2
	L	L	H	H	BA, RA	ACT	ILLEGAL	2
	L	L	H	L	BA, A10	PRE/PALL	ILLEGAL	2
	L	L	L	H	x	REF/SELF	ILLEGAL	
	L	L	L	L	Op-Code	MRS	ILLEGAL	
	L	L	L	L	Op-Code	EMRS	ILLEGAL	

(3/3)

Current state	/CS	/RAS	/CAS	/WE	Address	Command	Action	Notes
Write recovering	H	x	x	x	x	DESL	Nop (Row active after t_{WR})	
	L	H	H	H	x	NOP	Nop (Row active after t_{WR})	
	L	H	H	L	x	BST	Nop (Row active after t_{WR})	
	L	H	L	H	BA, CA, A10	READ/READA	Begin read/read with AP	
	L	H	L	L	BA, CA, A10	WRIT/WRITA	Begin new write/write with AP	
	L	L	H	H	BA, RA	ACT	ILLEGAL	2
	L	L	H	L	BA, A10	PRE/PALL	ILLEGAL	2
	L	L	L	H	x	REF/SELF	ILLEGAL	
	L	L	L	L	Op-Code	MRS	ILLEGAL	
	L	L	L	L	Op-Code	EMRS	ILLEGAL	
Write recovering with auto precharge	H	x	x	x	x	DESL	Nop (Idle after t_{DAL})	
	L	H	H	H	x	NOP	Nop (Idle after t_{DAL})	
	L	H	H	L	x	BST	ILLEGAL	
	L	H	L	H	BA, CA, A10	READ/READA	ILLEGAL	
	L	H	L	L	BA, CA, A10	WRIT/WRITA	ILLEGAL	
	L	L	H	H	BA, RA	ACT	ILLEGAL	2
	L	L	H	L	BA, A10	PRE/PALL	ILLEGAL	2
	L	L	L	H	x	REF/SELF	ILLEGAL	
	L	L	L	L	Op-Code	MRS	ILLEGAL	
	L	L	L	L	Op-Code	EMRS	ILLEGAL	
Refresh	H	x	x	x	x	DESL	Nop (Idle after t_{RFC})	
	L	H	H	H	x	NOP	Nop (Idle after t_{RFC})	
	L	H	H	L	x	BST	Nop (Idle after t_{RFC})	2
	L	H	L	x	x	READ/WRIT	ILLEGAL	2
	L	L	H	x	x	ACT/PRE/PALL	ILLEGAL	3
	L	L	L	x	x	REF/SELF/MRS/E MRS	ILLEGAL	
Mode register accessing	H	x	x	x	x	DESL	Nop (Idle after t_{MRD})	
	L	H	H	H	x	NOP	Nop (Idle after t_{MRD})	
	L	H	H	L	x	BST	ILLEGAL	2
	L	H	x	x	x	READ/WRIT	ILLEGAL	2
	L	L	x	x	x	ACT/PRE/PALL/R EF/SELF/MRS/EM RS	ILLEGAL	2

Remark H = High level, L = Low level, x = High or Low level (Don't care),

BA = Bank address, RA = Row address, CA = Column address, A10 = Precharge control address,

Op-Code = Operand code, Nop = No operation, AP = Auto precharge,

ILLEGAL = Device operation and/or data-integrity are not guaranteed

Notes 1. All entries assume that CKE was active (High level) during the preceding clock cycle and the current clock cycle.

2. ILLEGAL to bank in specified states; function may be legal in the bank indicated by BA0, BA1 depending on the state of that bank.

3. Nop to bank precharging or in idle state. May precharge bank indicated by BA0, BA1.

4. ILLEGAL if any bank is not idle.

5. ILLEGAL if t_{RAS} is not satisfied.

6. Must satisfy command interval and/or burst terminate condition.

4.5 Command Truth Table for CKE

Current State	CKE		/CS	/RAS	/CAS	/WE	Add	Command	Action	Notes
	n-1	n								
Self refresh	H	x	x	x	x	x	x		ILLEGAL (Impossible)	
	L	H	H	x	x	x	x	SREX	Exit S.R, self refresh recovery	2
			L	H	H	x	x			
	L	L	x	x	x	x	x		Maintain self refresh	
Self refresh recovery	H	H	H	x	x	x	x	DESL	Nop (Idle after t_{RC})	
	H	H	L	H	H	H	x	NOP	Nop (Idle after t_{RC})	
	H	L	x	x	x	x	x		ILLEGAL	
	L	x	x	x	x	x	x		ILLEGAL (Impossible)	
Power down	H	x	x	x	x	x	x		ILLEGAL (Impossible)	
	L	H	H	x	x	x	x	PDEX	Exit power down, Idle	
			L	H	H	x	x			
	L	L	x	x	x	x	x		Maintain power down	
All banks idle	H	H	V	V	V	V	x		Refer to operative command table	
	H	L	H	x	x	x	x	PWDN	Power down entry	1
	H	L	L	H	H	H	x	PWDN	Power down entry	1
	H	L	L	x	x	L	x		ILLEGAL	
	H	L	L	H	L	x	x		ILLEGAL	
	H	L	L	L	H	x	x		ILLEGAL	
	H	L	L	L	L	H	x	SELF	Self refresh entry	1
	L	x	x	x	x	x	x		Power down	
Row active	H	x	x	x	x	x	x		Refer to operative command table	
	L	x	x	x	x	x	x		Power down	1
Any state except listed above	H	H	V	V	V	V	V		Refer to operative command table	
	H	L	x	x	x	x	x		ILLEGAL	
	L	x	x	x	x	x	x		ILLEGAL (Impossible)	

Remark H = High level, L = Low level, x = High or Low level (Don't care), V = Valid,

Add = Address (A0 - A11, BA0, BA1),

ILLEGAL = Device operation and/or data-integrity are not guaranteed

Notes 1. Self refresh can be entered only from all banks idle state.

Power down can be entered only from all banks idle or row active state.

2. CKE low to high transition will re-enable CLK and other inputs asynchronously.


A Minimum setup time must be satisfied before any command other than exit.

5. Initialization

The μ PD45D128xxx is initialized in the power-on sequence according to the following.

- (1) Power must first be applied to V_{DD} , then V_{DDQ} , and finally to V_{REF} . V_{TT} must be applied.
- (2) Maintaining an LVCMOS LOW level on CKE during power-up is required to guarantee that the DQ and DQS output will be in Hi-Z state.
- (3) To stabilize internal circuits, when power is applied a 100 μ s or longer pause must precede any signal toggling.
- (4) After the pause, all banks must be precharged using precharge command. The precharge all banks command is convenient.
- (5) EMRS command must be performed to enable or disable DLL. Then MRS command must be applied to reset DLL. After this MRS command additional 200 cycles are required before read command.
- (6) All banks must be precharged using precharge command again. Then two or more CBR (auto) refresh command must be performed.
- (7) After the refresh the mode register can be programmed by MRS command.

Case 1: MRS after the REF

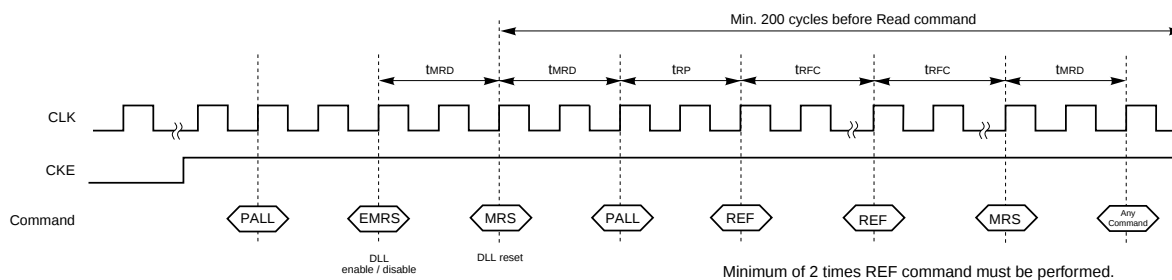

Remark Two refresh commands may be follow the first MRS command.

6. Programming the Mode Register

The mode register is programmed by the Mode register set command using address bits BA0, BA1, A11 through A0 as data inputs. The register retains data until it is reprogrammed or the device loses power.

The mode register has five fields;

Option	: A11 through A9, A7
DLL reset	: A8
/CAS latency	: A6 through A4
Wrap type	: A3
Burst length	: A2 through A0

Following mode register programming, no command can be issued during t_{MRD} .

/CAS Latency

/CAS latency is the mode critical of the parameters being set. It tells the device how many clocks must elapse before the data will be available.

The value is determined by the frequency of the clock and the speed grade of the device.

Burst Length

Burst length is the number of words that will be output or input in a read or write cycle. After a read burst is completed, the output bus will become Hi-Z.

The burst length is programmable as 2, 4 and 8.

Wrap Type (Burst Sequence)

The wrap type specifies the order in which the burst data will be addressed. This order is programmable as either "Sequential" or "Interleave". The method chosen will depend on the type of CPU in the system.

Some microprocessor cache system are optimized for sequential addressing and others for interleaved addressing.

7.1 Burst Length and Sequence shows the addressing sequence for each burst length using them. Both sequences support bursts of 2, 4 and 8.

The extended mode register has two fields;

Option	: A11 through A1
DLL enable	: A0

7. Mode Register

BA1	BA0	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1	A0	Vender specific
x	x	x	x	x	0	1	V	V	V	V	V	V	V	


BA1	BA0	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1	A0	Extended mode register set
0	1	0	0	0	0	0	0	0	0	0	0	0	DLL	

Bit 0	DLL
0	Enable
1	Disable

BA1	BA0	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1	A0	Mode register set
0	0	0	0	0	DLL	0	LTMODE	WT	BL					

Bit 8	DLL
0	Normal
1	Reset

Remark V = Valid, x = Don't care

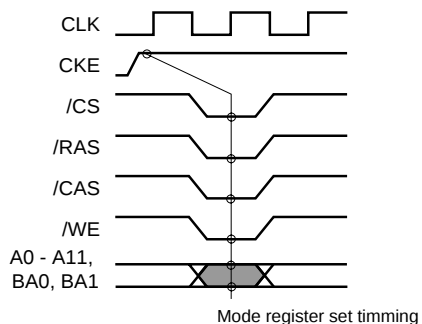

Burst Length	Bit 2 - Bit 0	WT = 0	WT = 1
	000	R	R
	001	2	2
	010	4	4
	011	8	8
	100	R	R
	101	R	R
	110	R	R
	111	R	R

Wrap Type	Bit 3	Mode
	0	Sequential
	1	Interleave

Latency Mode	Bit 6 - Bit 4	/CAS Latency
	000	R
	001	R
	010	2
	011	R
	100	R
	101	R
	110	2.5
	111	R

Remark R: Reserved

7.1 Burst Length and Sequence

[Burst Length = Two]

Starting Address (column address A0, binary)	Sequential Addressing Sequence (decimal)	Interleave Addressing Sequence (decimal)
0	0, 1	0, 1
1	1, 0	1, 0

[Burst Length = Four]

Starting Address (column address A1 - A0, binary)	Sequential Addressing Sequence (decimal)	Interleave Addressing Sequence (decimal)
00	0, 1, 2, 3	0, 1, 2, 3
01	1, 2, 3, 0	1, 0, 3, 2
10	2, 3, 0, 1	2, 3, 0, 1
11	3, 0, 1, 2	3, 2, 1, 0

[Burst Length = Eight]

Starting Address (column address A2 - A0, binary)	Sequential Addressing Sequence (decimal)	Interleave Addressing Sequence (decimal)
000	0, 1, 2, 3, 4, 5, 6, 7	0, 1, 2, 3, 4, 5, 6, 7
001	1, 2, 3, 4, 5, 6, 7, 0	1, 0, 3, 2, 5, 4, 7, 6
010	2, 3, 4, 5, 6, 7, 0, 1	2, 3, 0, 1, 6, 7, 4, 5
011	3, 4, 5, 6, 7, 0, 1, 2	3, 2, 1, 0, 7, 6, 5, 4
100	4, 5, 6, 7, 0, 1, 2, 3	4, 5, 6, 7, 0, 1, 2, 3
101	5, 6, 7, 0, 1, 2, 3, 4	5, 4, 7, 6, 1, 0, 3, 2
110	6, 7, 0, 1, 2, 3, 4, 5	6, 7, 4, 5, 2, 3, 0, 1
111	7, 0, 1, 2, 3, 4, 5, 6	7, 6, 5, 4, 3, 2, 1, 0

8. Address Bits of Bank-Select and Precharge

[Activate Command]

BA1	BA0	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1	A0	Row Address
-----	-----	-----	-----	----	----	----	----	----	----	----	----	----	----	-------------

BA1	BA0	Result
0	0	Select Bank A, "Activate" command
0	1	Select Bank B, "Activate" command
1	0	Select Bank C, "Activate" command
1	1	Select Bank D, "Activate" command

[Precharge Command]

BA1	BA0	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1	A0	Row Address
-----	-----	-----	-----	----	----	----	----	----	----	----	----	----	----	-------------

BA1	BA0	A10	Result
0	0	0	Precharge Bank A
0	1	0	Precharge Bank B
1	0	0	Precharge Bank C
1	1	0	Precharge Bank D
x	x	1	Precharge All Banks

Remark x = Don't care

[Read/Write Command]

BA1	BA0	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1	A0	Column Address
-----	-----	-----	-----	----	----	----	----	----	----	----	----	----	----	----------------

A10	Result
0	Disables Auto-Precharge
1	Enables Auto-Precharge

BA1	BA0	Result
0	0	Enables Read/Write commands for Bank A
0	1	Enables Read/Write commands for Bank B
1	0	Enables Read/Write commands for Bank C
1	1	Enables Read/Write commands for Bank D

9. Precharge


9.1 Read to Precharge Command Interval

The precharge command can be issued anytime after $t_{RAS(MIN)}$ is satisfied. Soon after the precharge command is issued, precharge operation performed and the DDR SDRAM enters the idle state after t_{RP} is satisfied. The parameter t_{RP} is the time required to perform the precharge.

The earliest timing in a read cycle that a precharge command can be issued without losing any data in the burst is as follows.


$/CAS\ latency = 2$: (burst length/2) clocks after the read command is issued.

$/CAS\ latency = 2.5$: (burst length/2) clocks after the read command is issued.

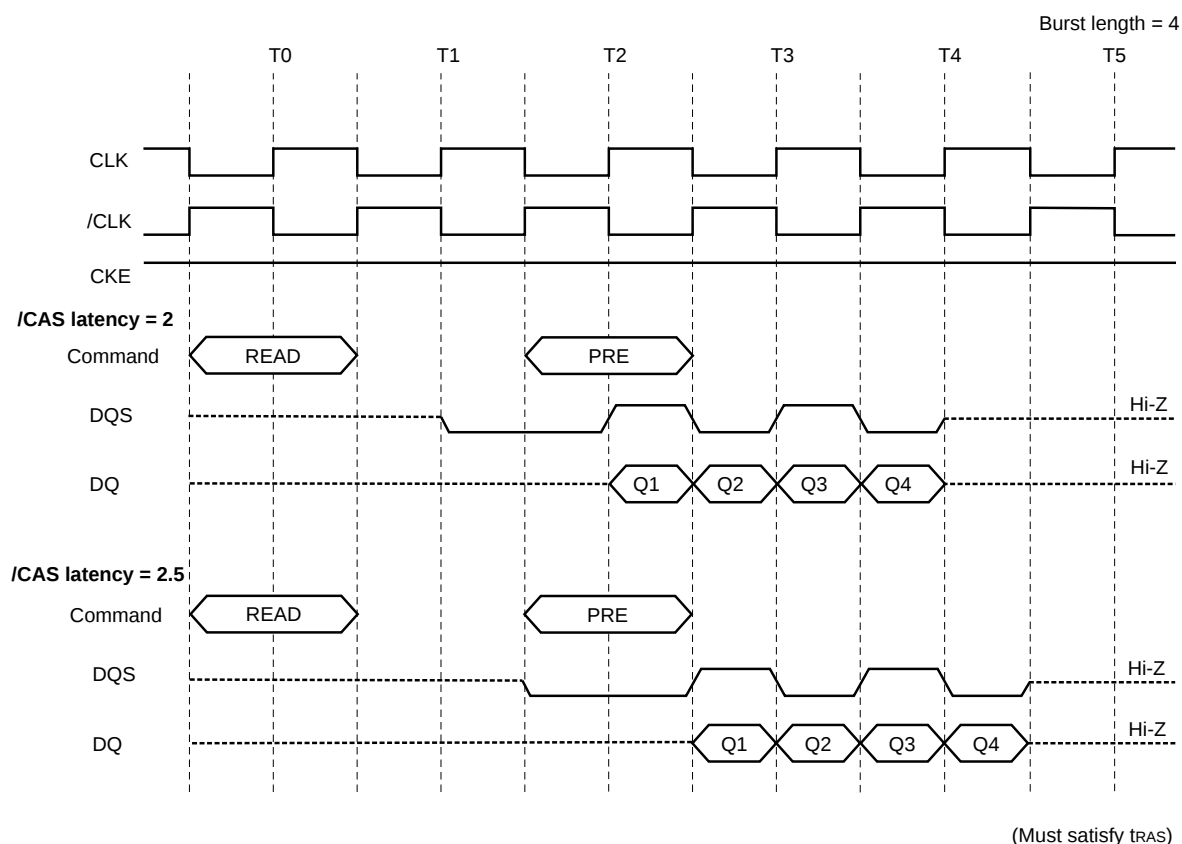

9.2 Write to Precharge Command Interval

In order to write all burst data to the memory cell correctly, the asynchronous parameter t_{WR} must be satisfied. The t_{WR} specification defines the earliest time that a precharge command can be issued.

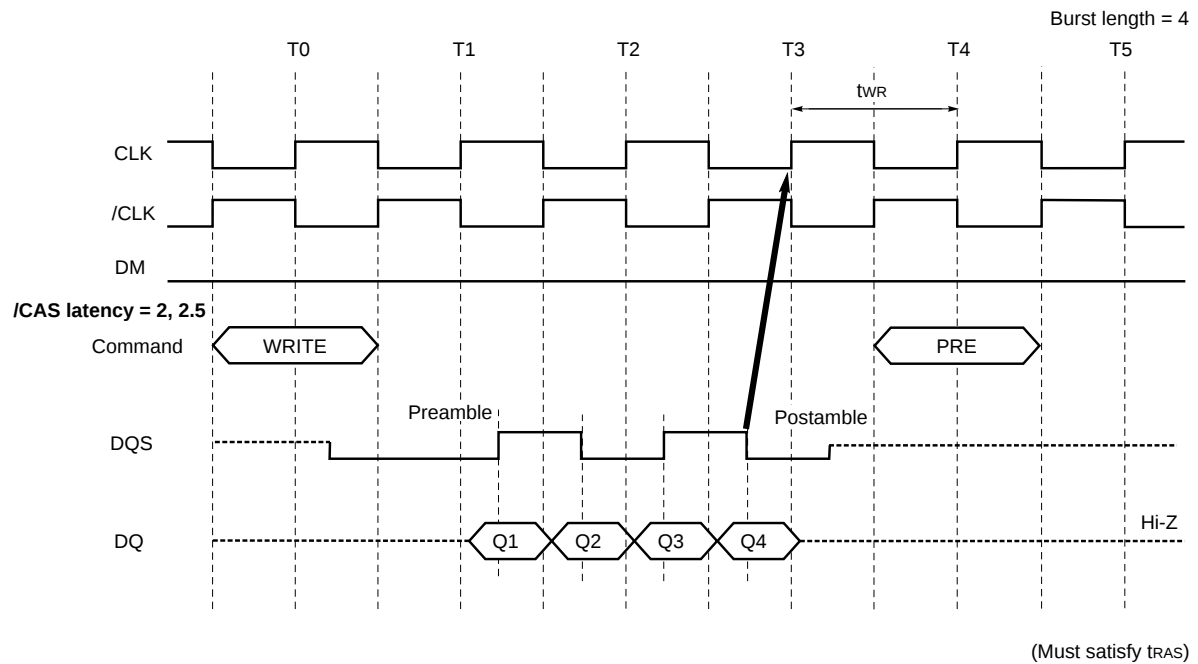

10. Auto Precharge

During a read or write command cycle, A10 controls whether auto precharge is selected. A10 high in the read or write command (read with auto precharge command or write with auto precharge command), auto precharge is selected and begins automatically.


The t_{RAS} must be satisfied with a read with auto precharge or a write with auto precharge operation. In addition, the next activate command to the bank being precharged cannot be executed until the precharge cycle ends.

In read cycle, once auto precharge has started, an activate command to the bank can be issued after t_{RP} has been satisfied.

In write cycle, the t_{DAL} must be satisfied to issue the next activate command to the bank being precharged.

10.1 Read with Auto Precharge


When a read with auto precharge command is issued, the auto precharge begins (Burst length / 2) clocks later from a read with auto precharge command.

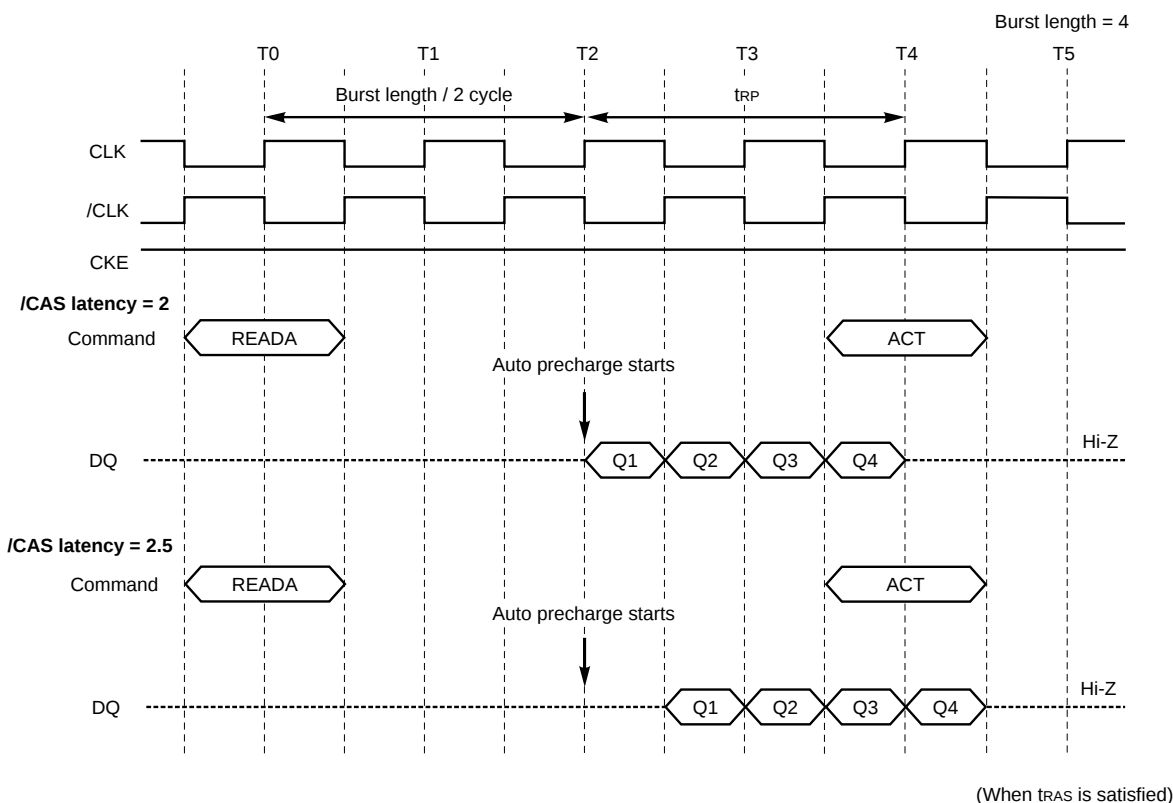

Remark READA means Read with Auto Precharge command

10.2 Write with Auto Precharge

When a write with auto precharge command is issued, the auto precharge begins after t_{WR} is satisfied.

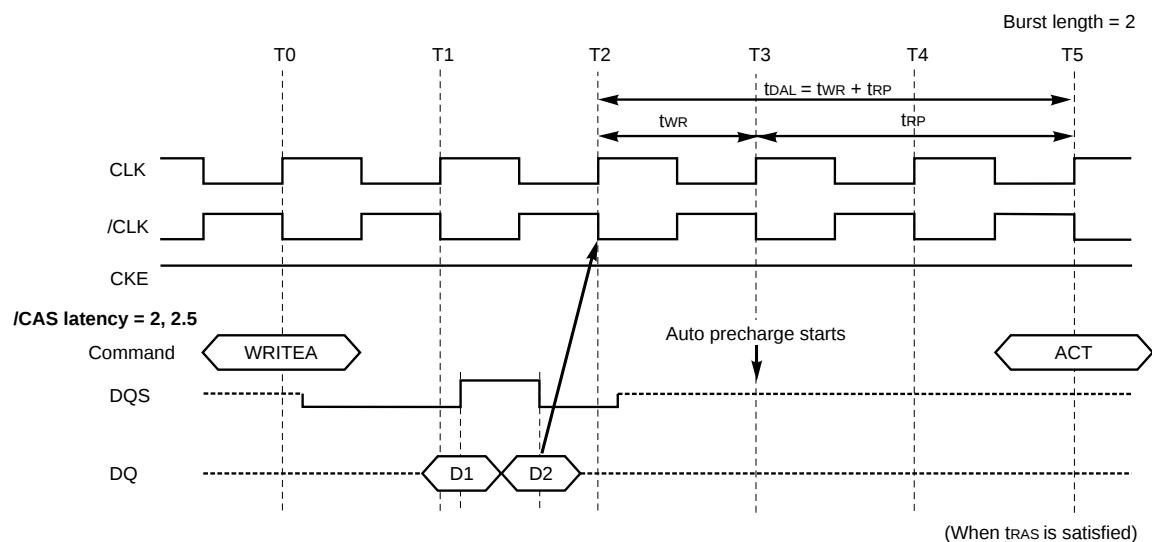


Remark WRITEA means Write with Auto Precharge command

11. Read/Write Command Interval

11.1 Read to Read Command Interval

During a read cycle, when new read command is issued, it will be effective after /CAS latency, even if the previous read operation does not completed. READ will be interrupted by another READ.


The interval between commands is minimum 1 cycle. Each read command can be issued in every clock without any restriction.

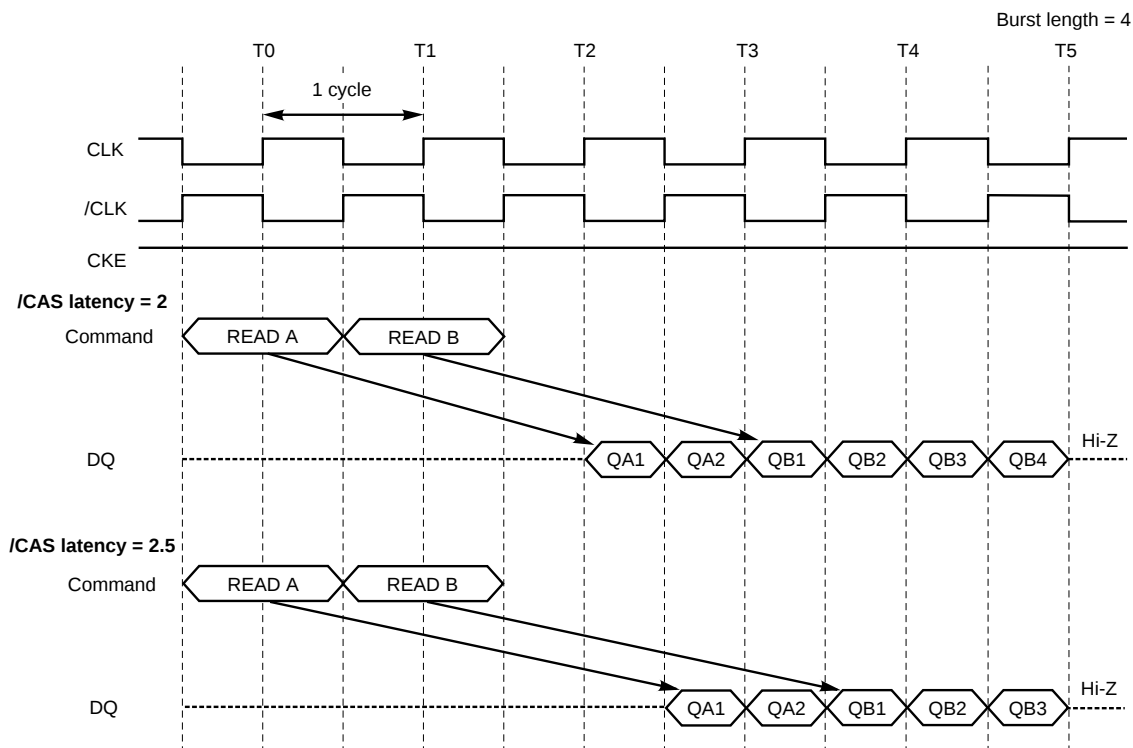

11.2 Write to Write Command Interval

During a write cycle, when new write command is issued, the previous burst will terminate and the new burst will begin with new write command. WRITE will be interrupted by another WRITE.

The interval between commands is minimum 1 cycle. Each write command can be issued in every clock without any restriction.

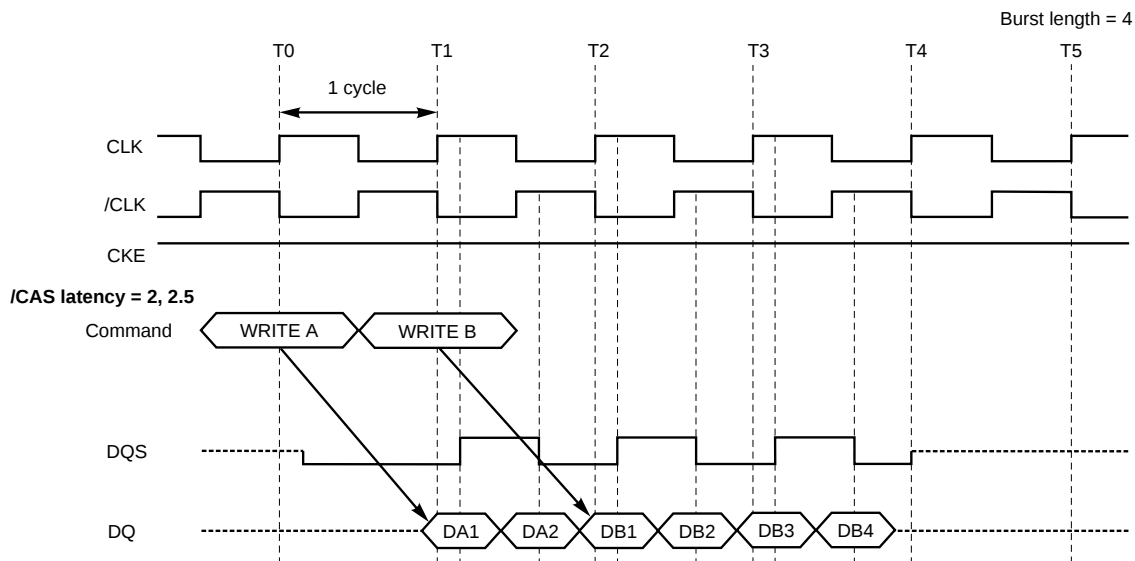


11.3 Write to Read Command Interval

The burst write operation can be interrupted by read command of any bank. The data bus must be high impedance at least 1 cycle prior to the first output data.

The minimum time interval between the rising clock edge after the last input data and the read command is t_{WR} .


When the read command is issued, the invalid data from the burst write cycle must be masked by DM.

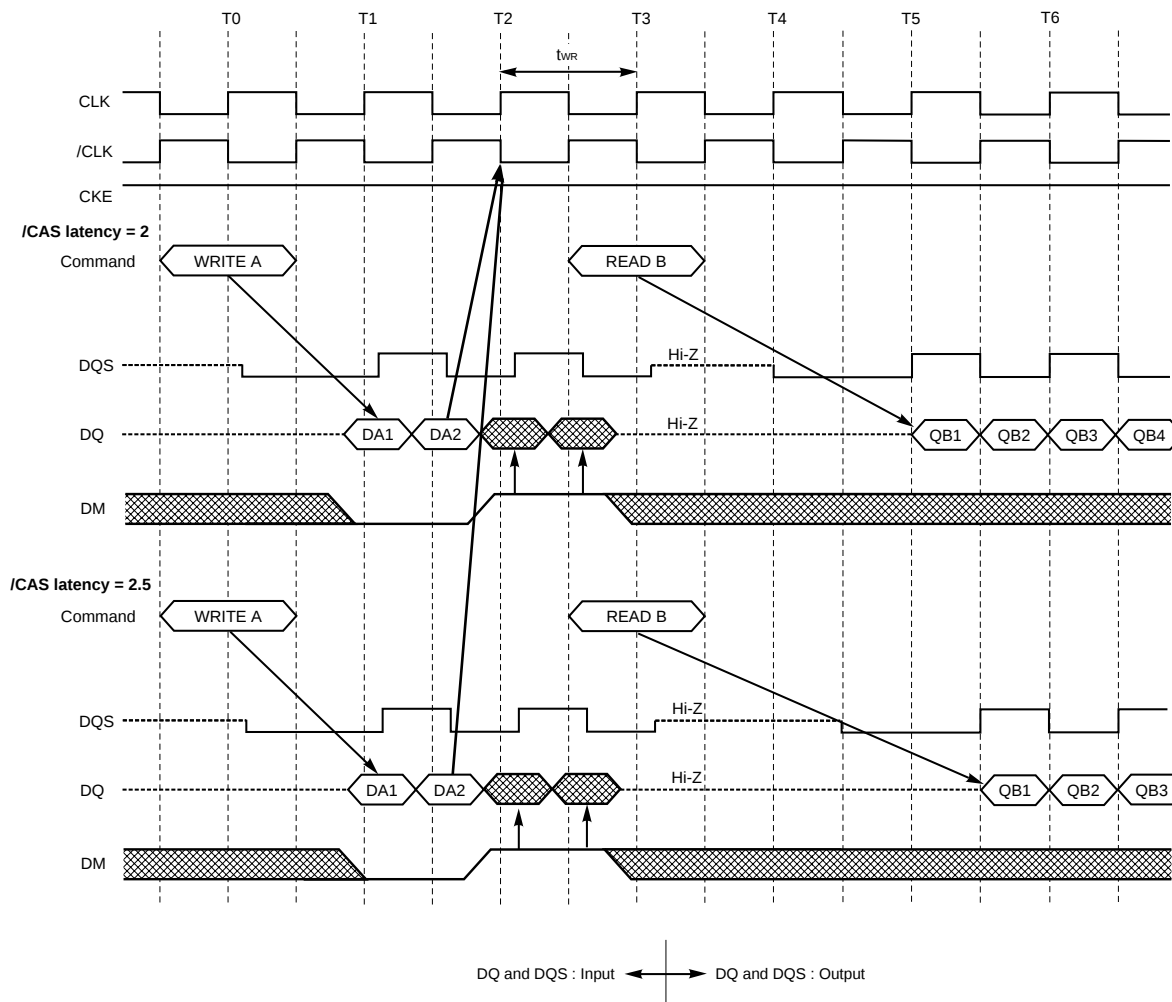

11.4 Read to Write Command Interval

To interrupt the burst read operation using the write command, the burst stop command must be issued to avoid data conflict. The data bus must be high impedance at least 1 cycle before the write command is issued.


When the write command is issued, any residual data from the burst read cycle must be terminated by the burst stop command. When /CAS latency is 2, 2.5, the burst stop command must be issued at least 2 cycles prior to the write command.

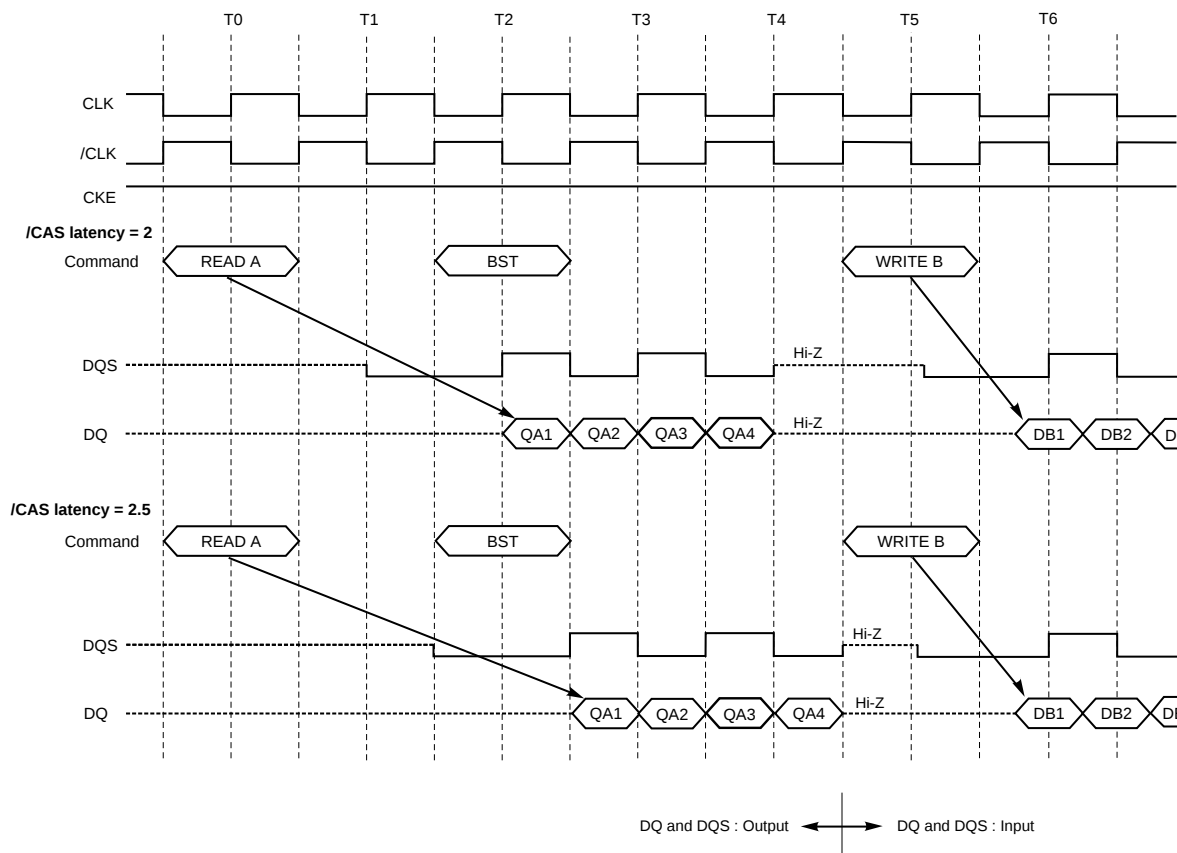

12. Burst Termination

12.1 Burst Stop Command in Read Cycle


During a burst read cycle, when the burst stop command is issued at the rising edge of the clock (CLK), the burst read data are terminated and the data bus goes to high impedance after the /CAS latency from the burst stop command.

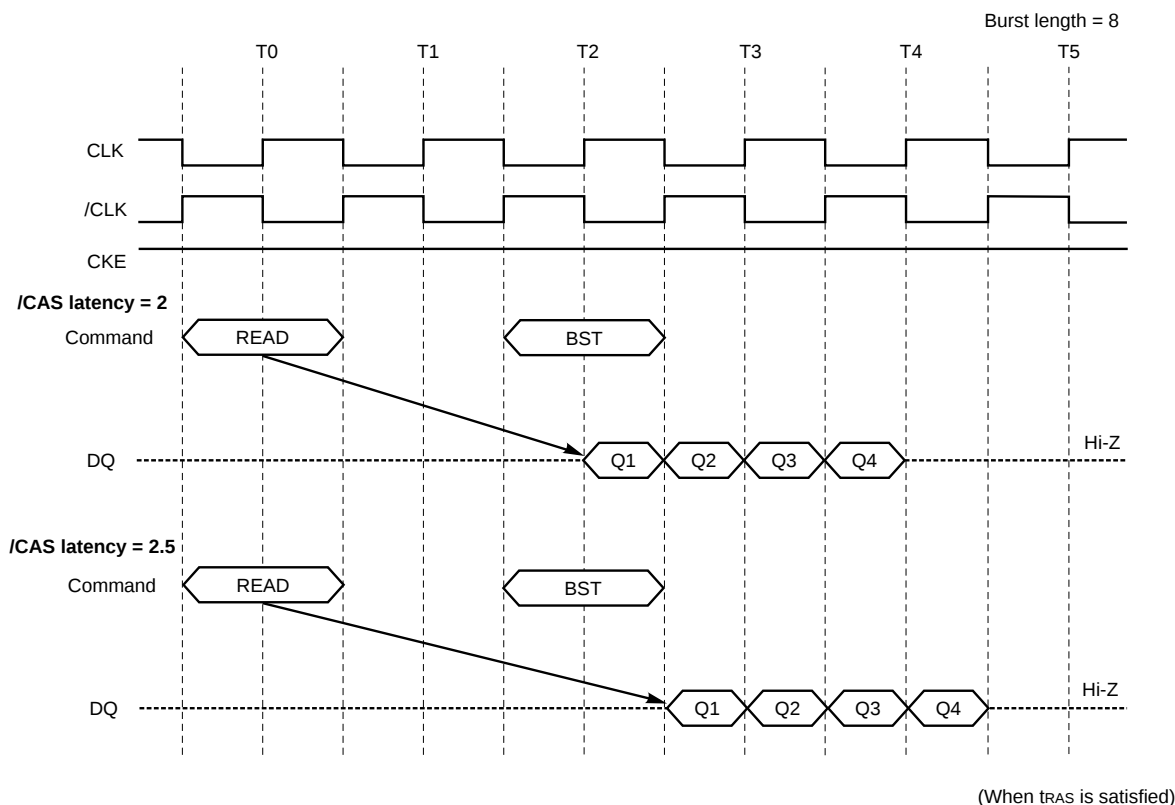

Remark BST means Burst Stop command


12.2 Precharge Termination in Read Cycle

During a burst read cycle without auto precharge, the burst read operation is terminated by a precharge command of the same banks. When the precharge command is issued at the rising edge of the clock (CLK), the burst read operation is terminated and the data bus goes to high impedance after the /CAS latency from the precharge command. The precharge command can be issued after $t_{RAS(MIN.)}$ is satisfied.

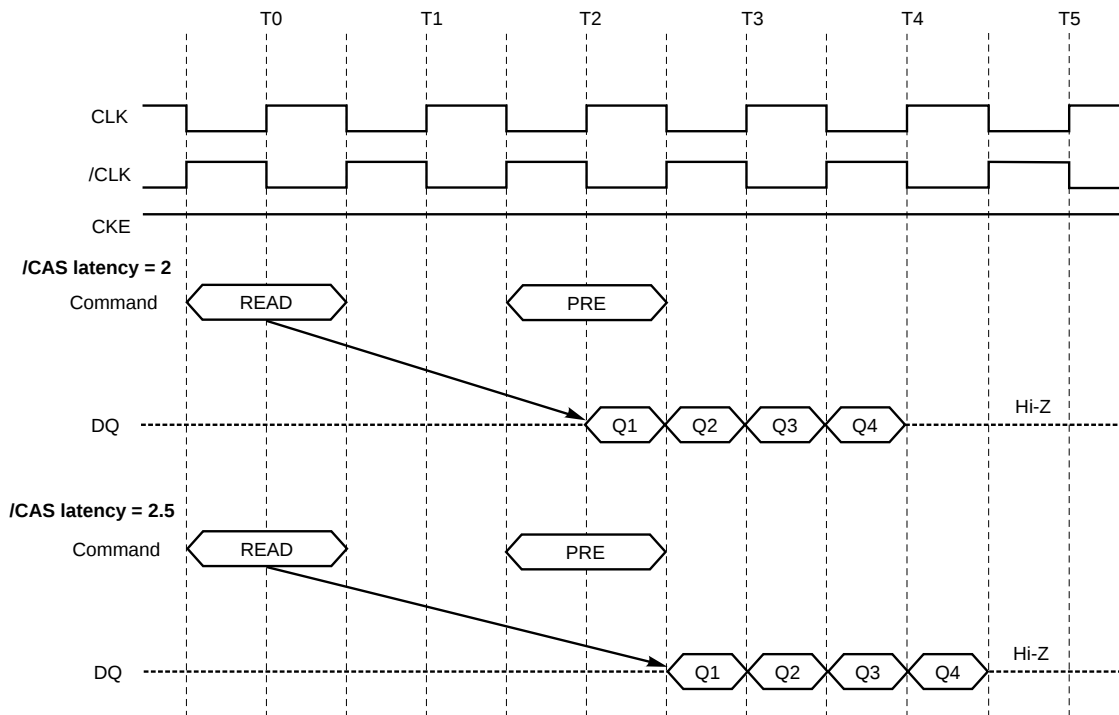

12.3 Precharge Termination in Write Cycle

During a burst write cycle without auto precharge, the burst write operation is terminated by a precharge command of the same banks. In order to write the last input data to the memory cell correctly, $t_{WR(MIN.)}$ must be satisfied. When the precharge command is issued at the rising edge of the clock (CLK), the invalid data from the burst write cycle must be masked DM.

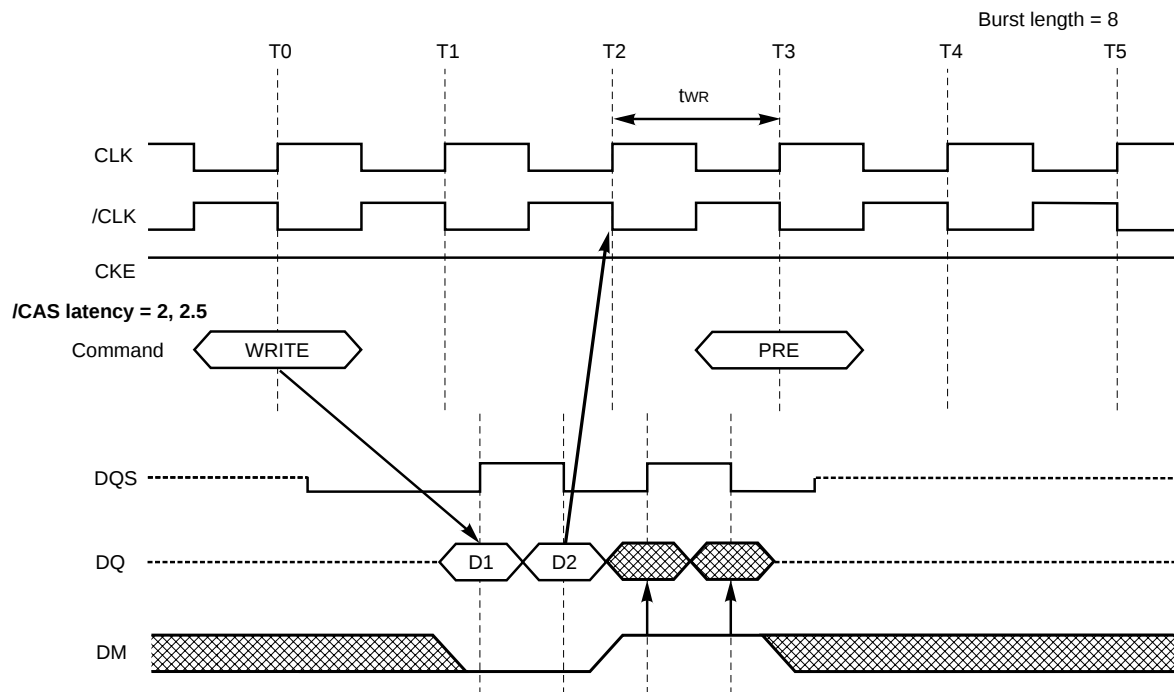

13. Electrical Specifications

- All voltages are referenced to V_{SS} (GND).
- After power up, wait more than 100 μ s and then, execute **Power on sequence and CBR (auto) Refresh** before proper device operation is achieved.

13.1 Absolute Maximum Ratings

Parameter	Symbol	Condition	Rating	Unit
Voltage on power supply pin relative to V_{SS}	V_{DD}, V_{DDQ}		-0.5 to +3.6	V
Voltage on any pin relative to V_{SS}	V_T		-0.5 to +3.6	V
Short circuit output current	I_O		50	mA
Power dissipation	P_D		1	W
Storage temperature	T_{slg}		-55 to + 125	°C

Caution Exposing the device to stress above those listed in Absolute Maximum Ratings could cause permanent damage. The device is not meant to be operated under conditions outside the limits described in the operational section of this specification. Exposure to Absolute Maximum Rating conditions for extended periods may affect device reliability.

13.2 Recommended Operating Conditions

Parameter	Symbol	Condition	MIN.	TYP.	MAX.	Unit
Supply voltage	V_{DD}		2.3	2.5	2.7	V
Supply voltage for DQ, DQS	V_{DDQ}		2.3	2.5	2.7	V
Input reference voltage	V_{REF}		$0.49 \times V_{DDQ}$		$0.51 \times V_{DDQ}$	V
Termination voltage	V_{TT}		$V_{REF} - 0.04$	V_{REF}	$V_{REF} + 0.04$	V
High level dc input voltage	V_{IH} (DC)		$V_{REF} + 0.15$		$V_{DD} + 0.3$	V
Low level dc input voltage	V_{IL} (DC)		-0.3		$V_{REF} - 0.15$	V
Input differential voltage (CLK and /CLK)	V_{ID} (DC)		0.36		$V_{DDQ} + 0.6$	V
Input crossing point voltage (CLK and /CLK)	V_{IX}		$0.5 \times V_{DDQ} - 0.2$		$0.5 \times V_{DDQ} + 0.2$	V
Operating ambient temperature	T_A		0		70	°C

13.3 Pin Capacitance ($T_A = 25^\circ\text{C}$, $f = 100\text{ MHz}$)

Parameter	Symbol	Condition	MIN.	TYP.	MAX.	Unit
Input capacitance	C_{I1}	A0 - A11, BA0, BA1	2.5		3.5	pF
	C_{I2}	CLK, /CLK, CKE, /CS, /RAS, /CAS, /WE	2.5		3.5	pF
Data input/output capacitance	C_{IO1}	DQS, LDQS, UDQS	4		5.5	pF
	C_{IO2}	DQ0 - DQ15, DM, LDM, UDM	4		5.5	pF

13.4 DC Characteristics 1 (Recommended Operating Conditions unless otherwise noted)

Parameter	Symbol	Test condition	/CAS latency	Grade	Maximum			Unit	Notes
					x4	x8	x16		
Operating current (ACT-PRE)	IDD0	trc = trc(MIN.), tck = tck (MIN.), One bank, Active-precharge, DQ, DM and DQS inputs changing twice per clock cycle, Address and control inputs changing once per clock cycle		-C75	160			mA	1
				-C80	140				
Operating current (ACT-READ-PRE)	IDD1	trc = trc(MIN.), tck = tck (MIN.), One bank, Active-read-precharge, Io = 0 mA, Burst length = 2, Address and control inputs changing once per clock cycle	CL = 2	-C75	165	170	175	mA	
				-C80	150	155	160		
			CL = 2.5	-C75	175	180	185		
				-C80	160	165	170		
Precharge power down standby current	IDD2P	CKE ≤ VIL(MAX.), tck = tck(MIN.), All banks idle, Power down mode			5			mA	
Idle standby current	IDD2N	CKE ≥ VIH(MIN.), tck = tck(MIN.), /CS ≥ VIH(MIN.), All banks idle, Address and other control inputs changing once per clock cycle			50			mA	
Active power down standby current	IDD3P	CKE ≤ VIL(MAX.), tck = tck(MIN.), One bank active, Power down mode			50			mA	
Active standby current	IDD3N	/CS ≥ VIH(MIN.), CKE ≥ VIH(MIN.), tck = tck(MIN.), trc = tras(MAX.), One bank, Active-precharge, DQ, DM and DQS inputs changing twice per clock cycle, Address and other control inputs changing once per clock cycle			70			mA	
Operating current (Burst read)	IDD4R	tck = tck(MIN.), Continuous burst read, Burst length = 2, Io = 0mA, One bank active, Address and control inputs changing once per clock cycle	CL = 2	-C75	170	180	200	mA	2
				-C80	170	180	200		
			CL = 2.5	-C75	230	240	265		
				-C80	215	225	250		
Operating current (Burst write)	IDD4W	tck = tck(MIN.), Continuous burst write, Burst length = 2, One bank active, Address and control inputs changing once per clock cycle	CL = 2	-C75	160	170	190	mA	2
				-C80	160	170	190		
			CL = 2.5	-C75	220	230	255		
				-C80	205	215	240		
CBR (auto) refresh current	IDD5	trfc = trfc(MIN.)		-C75	270			mA	
				-C80	250				
Self refresh current	IDD6	CKE ≤ 0.2 V			2			mA	

Notes 1. I_{DD1} depends on output loading and cycle rates. Specified values are obtained with the output open.

2. I_{DD4R} and I_{DD4W} depend on output loading and cycle rates. Specified values are obtained with the output open.

13.5 DC Characteristics 2 (Recommended Operating Conditions unless otherwise noted)

Parameter	Symbol	Test condition	MIN.	MAX.	Unit	Notes
Input leakage current	I _{IL}	V _I = 0 to 3.6 V, all other pins not under test = 0 V	-2	2	μA	
Output leakage current	I _{OL}	D _{OUT} is disabled, V _O = 0 to V _{DDQ} + 0.3 V	-5	5	μA	
Output high current	I _{OH}	V _{OUT} = V _{DDQ} - 0.43 V	-16.8		mA	
Output low current	I _{OL}	V _{OUT} = 0.35 V	16.8		mA	

13.6 AC Characteristics (Recommended Operating Conditions unless otherwise noted)


13.6.1 Test Conditions

Parameter	Symbol	Value	Unit	Notes
Input Reference voltage (Input timing measurement reference level)	V_{REF}	$V_{DDQ} \times 0.5$	V	
Termination voltage (Output timing measurement reference level)	V_{TT}	V_{REF}	V	1
High level ac input voltage	$V_{IH}(ac)$	$V_{REF} + 0.31$	V	
Low level ac input voltage	$V_{IL}(ac)$	$V_{REF} - 0.31$	V	
Input differential voltage (CLK and /CLK)	$V_{ID}(ac)$	0.7	V	
Input signal slew rate	SLEW	1	V/ns	2


Notes 1. Output waveform timing is measured where the output signal crosses through the V_{TT} level.

2. Slew rate is to be maintained in the $V_{IL}(ac)$ to $V_{IH}(ac)$ range of the input signal swing.

$$SLEW = (V_{IH}(ac) - V_{IL}(ac)) / \Delta t$$

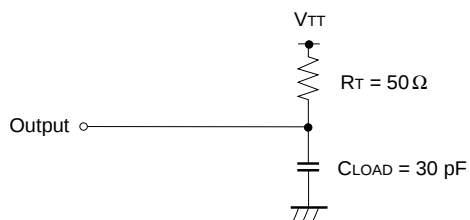

13.6.2 Timing Diagram

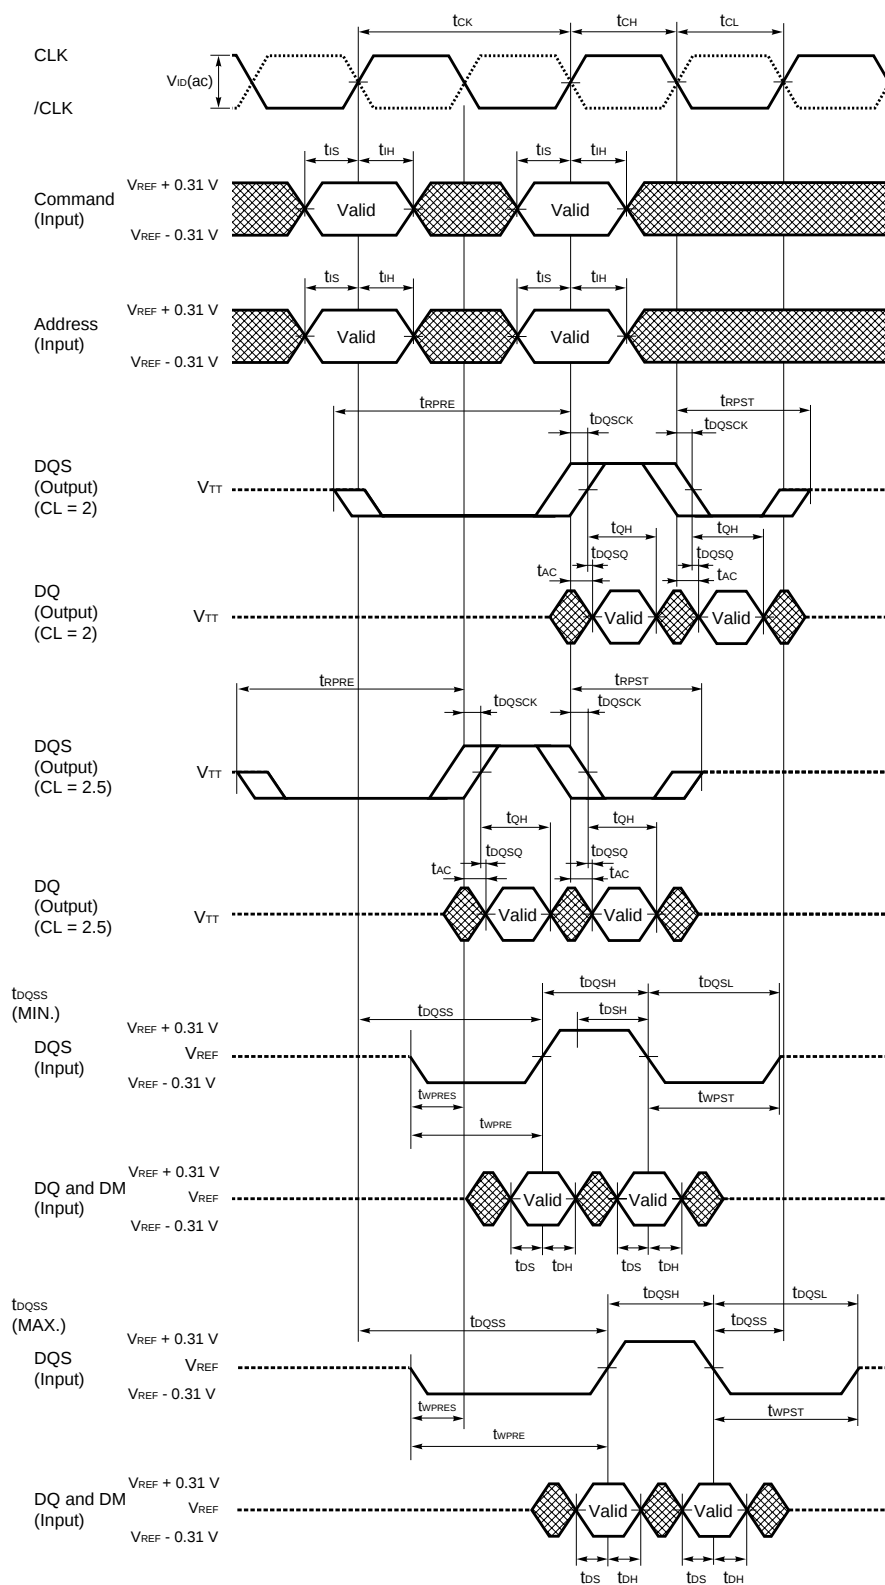

13.6.3 Synchronous Characteristics

Parameter		Symbol	-C75 (PC266B)		-C80 (PC200)		Unit	Note
			MIN.	MAX.	MIN.	MAX.		
Clock cycle time	CL = 2.5	t _{CK}	7.5	15	8	15	ns	
	CL = 2		10	15	10	15		
CLK high-level width		t _{CH}	0.45	0.55	0.45	0.55	t _{CK}	
CLK low-level width		t _{CL}	0.45	0.55	0.45	0.55	t _{CK}	
DQ output access time from CLK, /CLK		t _{AC}	-0.75	0.75	-0.8	0.8	ns	
DQS output access time from CLK, /CLK		t _{DQSCK}	-0.75	0.75	-0.8	0.8	ns	
DQS-DQ skew (for DQS and associated DQ signals)		t _{DQSQ}	-0.5	0.5	-0.6	0.6	ns	
DQS-DQ skew (for DQS and all DQ signals)		t _{DQSQA}	-0.5	0.5	-0.6	0.6	ns	
Data out low-impedance time from CLK, /CLK		t _{LZ}	-0.75	0.75	-0.8	0.8	ns	
Data out high-impedance time from CLK, /CLK		t _{HZ}	-0.75	0.75	-0.8	0.8	ns	
Half clock period		t _{HP}	t _{CH} , t _{CL}		t _{CH} , t _{CL}		ns	
DQS Read preamble		t _{RPRE}	0.9	1.1	0.9	1.1	t _{CK}	
DQS Read postamble		t _{RPST}	0.4	0.6	0.4	0.6	t _{CK}	
DQ-DQS hold, DQS to first DQ to go non-valid, per access		t _{QH}	t _{HP} - 0.75		t _{HP} - 1		ns	
DQ and DM input setup time		t _{DS}	0.5		0.6		ns	
DQ and DM input hold time		t _{DH}	0.5		0.6		ns	
DQ and DM input pulse width (for each input)		t _{DIPW}	1.75		2		ns	
DQS Write preamble setup time		t _{WPRES}	0		0		ns	
DQS Write preamble		t _{WPRE}	0.25		0.25		t _{CK}	
Write postamble		t _{WPST}	0.4	0.6	0.4	0.6	t _{CK}	
Write command to first DQS latching transition		t _{DQSS}	0.75	1.25	0.75	1.25	t _{CK}	
DQS input high pulse width		t _{DQSH}	0.35		0.35		t _{CK}	
DQS input low pulse width		t _{DQSL}	0.35		0.35		t _{CK}	
DQS falling edge to CLK setup time		t _{DSS}	0.2		0.2		t _{CK}	
DQS falling edge hold time from CLK		t _{DSH}	0.2		0.2		t _{CK}	
Address and control input setup time		t _{IS}	0.9		1.1		ns	
Address and control input hold time		t _{IH}	0.9		1.1		ns	
Address and control input pulse width		t _{IPW}	2.2		2.5		ns	
Internal write to read command delay		t _{WTR}	1		1		t _{CK}	

13.6.4 Synchronous Characteristics Example


Symbol	$t_{CK} = 7.5 \text{ ns}$		$t_{CK} = 8 \text{ ns}$		$t_{CK} = 10 \text{ ns}$		Unit
	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	
t_{CH}	3.375	4.125	3.6	4.4	4.5	5.5	ns
t_{CL}	3.375	4.125	3.6	4.4	4.5	5.5	ns
t_{RPRE}	6.75	8.25	7.2	8.8	9	11	ns
t_{RPST}	3	4.5	3.2	4.8	4	6	ns
t_{WPRE}	1.875		2		2.5		ns
t_{WPST}	3	4.5	3.2	4.8	4	6	ns
t_{DOSS}	5.625	9.375	6	10	7.5	12.5	ns
t_{DQSH}	2.625		2.8		3.5		ns
t_{DQSL}	2.625		2.8		3.5		ns
t_{DSS}	1.5		1.6		2		ns
t_{DSH}	1.5		1.6		2		ns
t_{WTR}	7.5		8		10		ns

13.6.5 Asynchronous Characteristics

Parameter	Symbol	-C75(PC266B)		-C80(PC200)		Unit
		MIN.	MAX.	MIN.	MAX.	
ACT to REF/ACT command period (operation)	t_{RC}	65		70		ns
REF to REF/ACT command period (refresh)	t_{RFC}	75		80		ns
ACT to PRE command period	t_{RAS}	45	120,000	50	120,000	ns
PRE to ACT command period	t_{RP}	20		20		ns
ACT to READ/WRITE delay	t_{RCD}	20		20		ns
ACT(one) to ACT(another) command period	t_{RRD}	15		15		ns
Write recovery time	t_{WR}	15		15		ns
Auto precharge write recovery time + precharge time	t_{DAL}	35		35		ns
Mode register set command cycle time	t_{MRD}	15		15		ns
Exit self refresh to command	t_{XSNR}	75		80		ns
Refresh time (4,096 refresh cycles)	t_{REF}		64		64	ms

[illegible]


AC Parameters for Read Timing 2 (Auto Precharge, Burst Length = 4, /CAS Latency = 2.5)

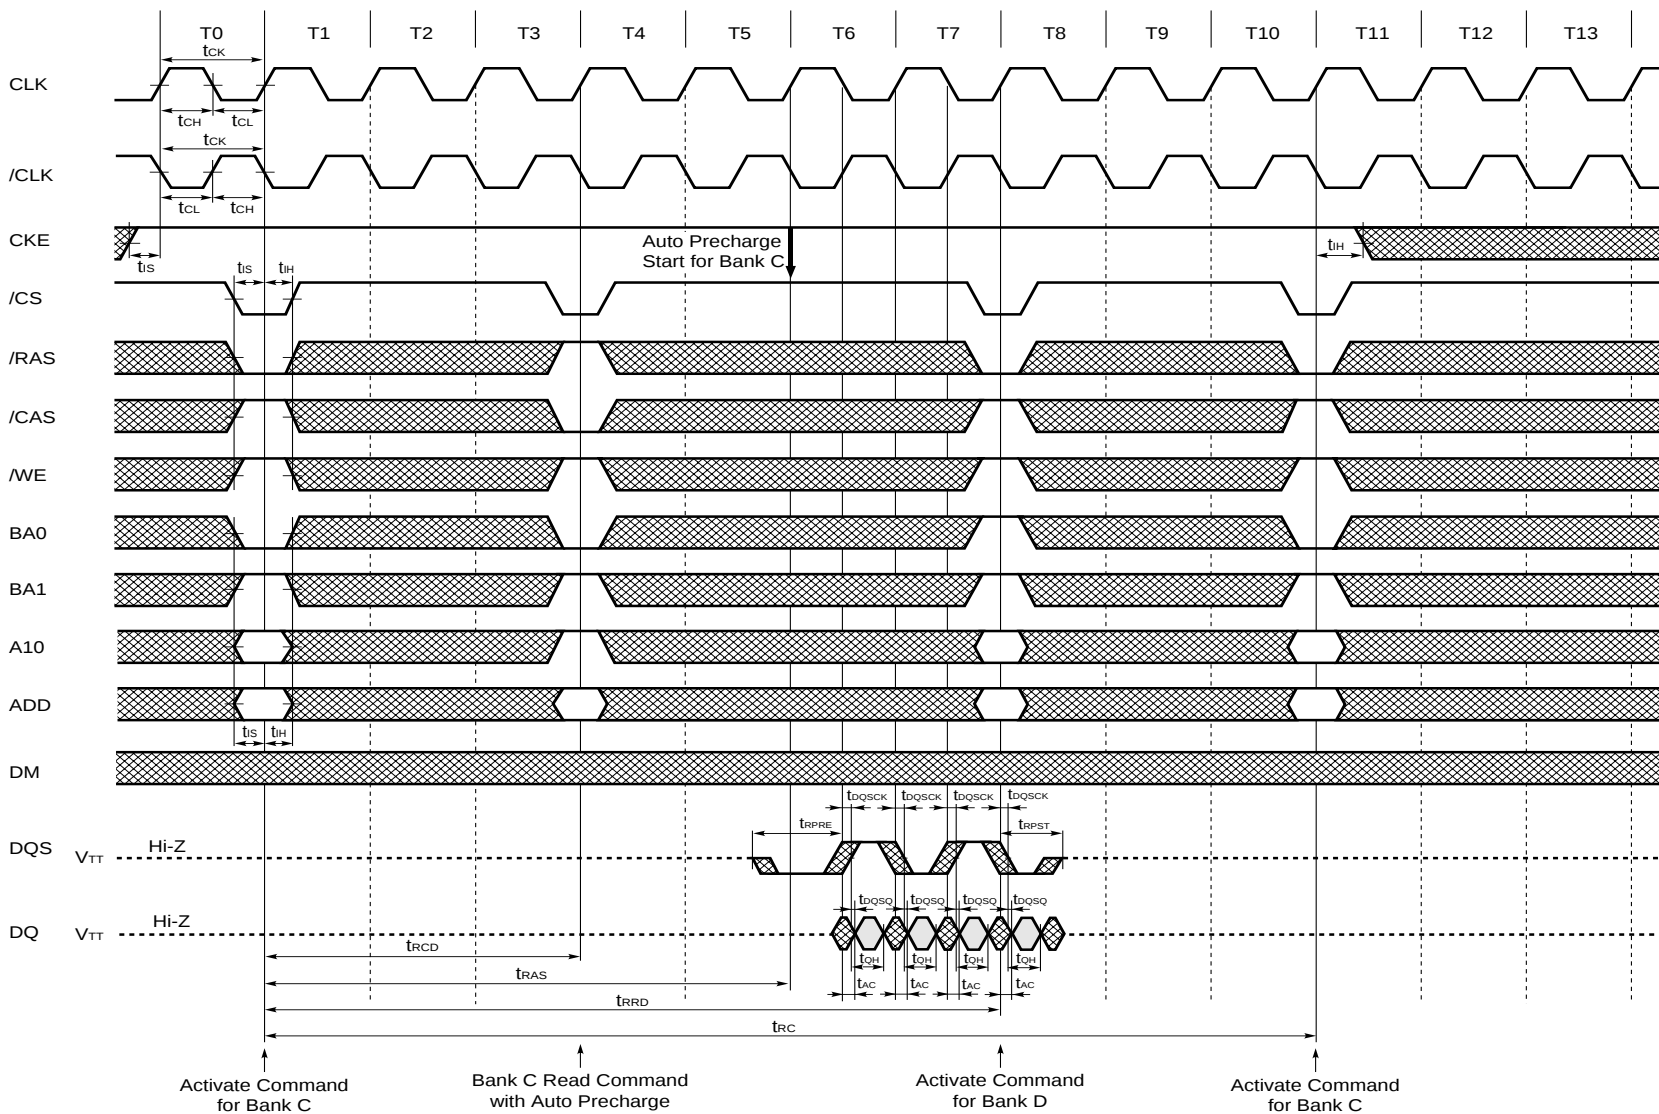


Relationship between Frequency and Latency

Speed version	-C75		-C80	
Clock cycle time [ns]	7.5	10	8	10
Frequency [MHz]	133	100	125	100
/CAS latency	2.5	2	2.5	2
[t _{RCD}]	3	2	3	2
/RAS latency (/CAS latency + [t _{RCD}])	5.5	4	5.5	4
[t _{RC}]	9	7	9	7
[t _{RFC}]	10	8	10	8
[t _{RAS}]	6	5	7	5
[t _{RRD}]	2	2	2	2
[t _{RP}]	3	2	3	2
[t _{WR}]	2	2	2	2
[t _{DAL}]	5	4	5	4
[t _{MRD}]	2	2	2	2
[t _{XSNR}]	10	8	10	8


AC Parameters for Write Timing (Burst Length = 8, /CAS Latency = 2.5)

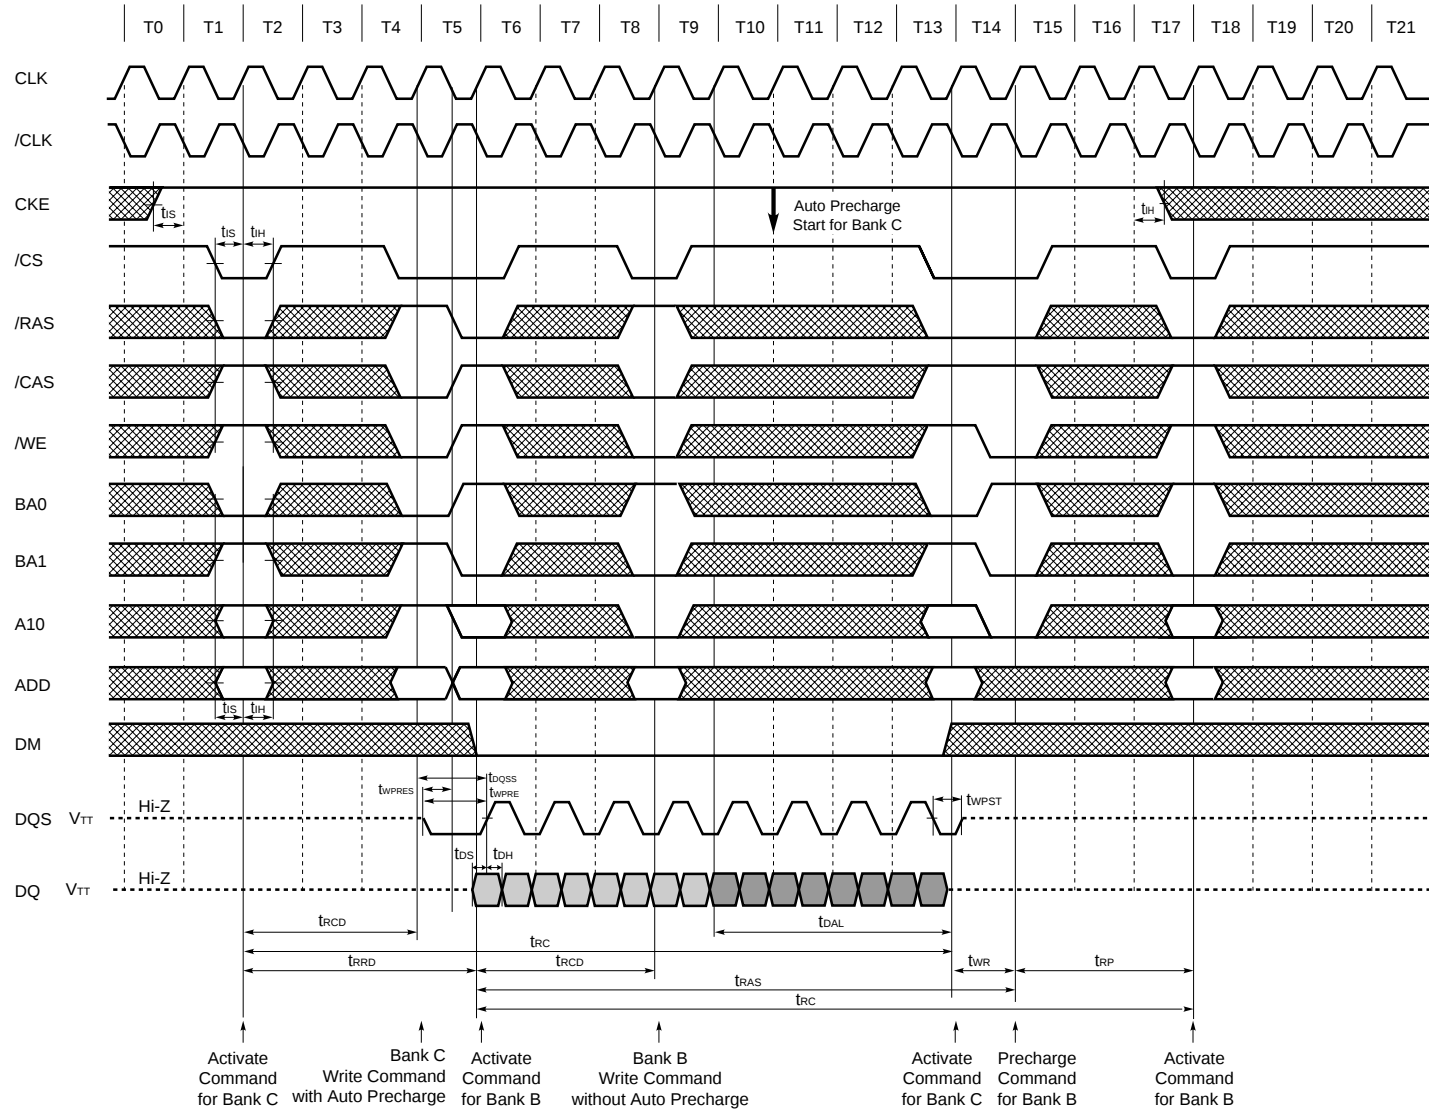

Mode Register Set (Burst Length = 4, /CAS Latency = 2)

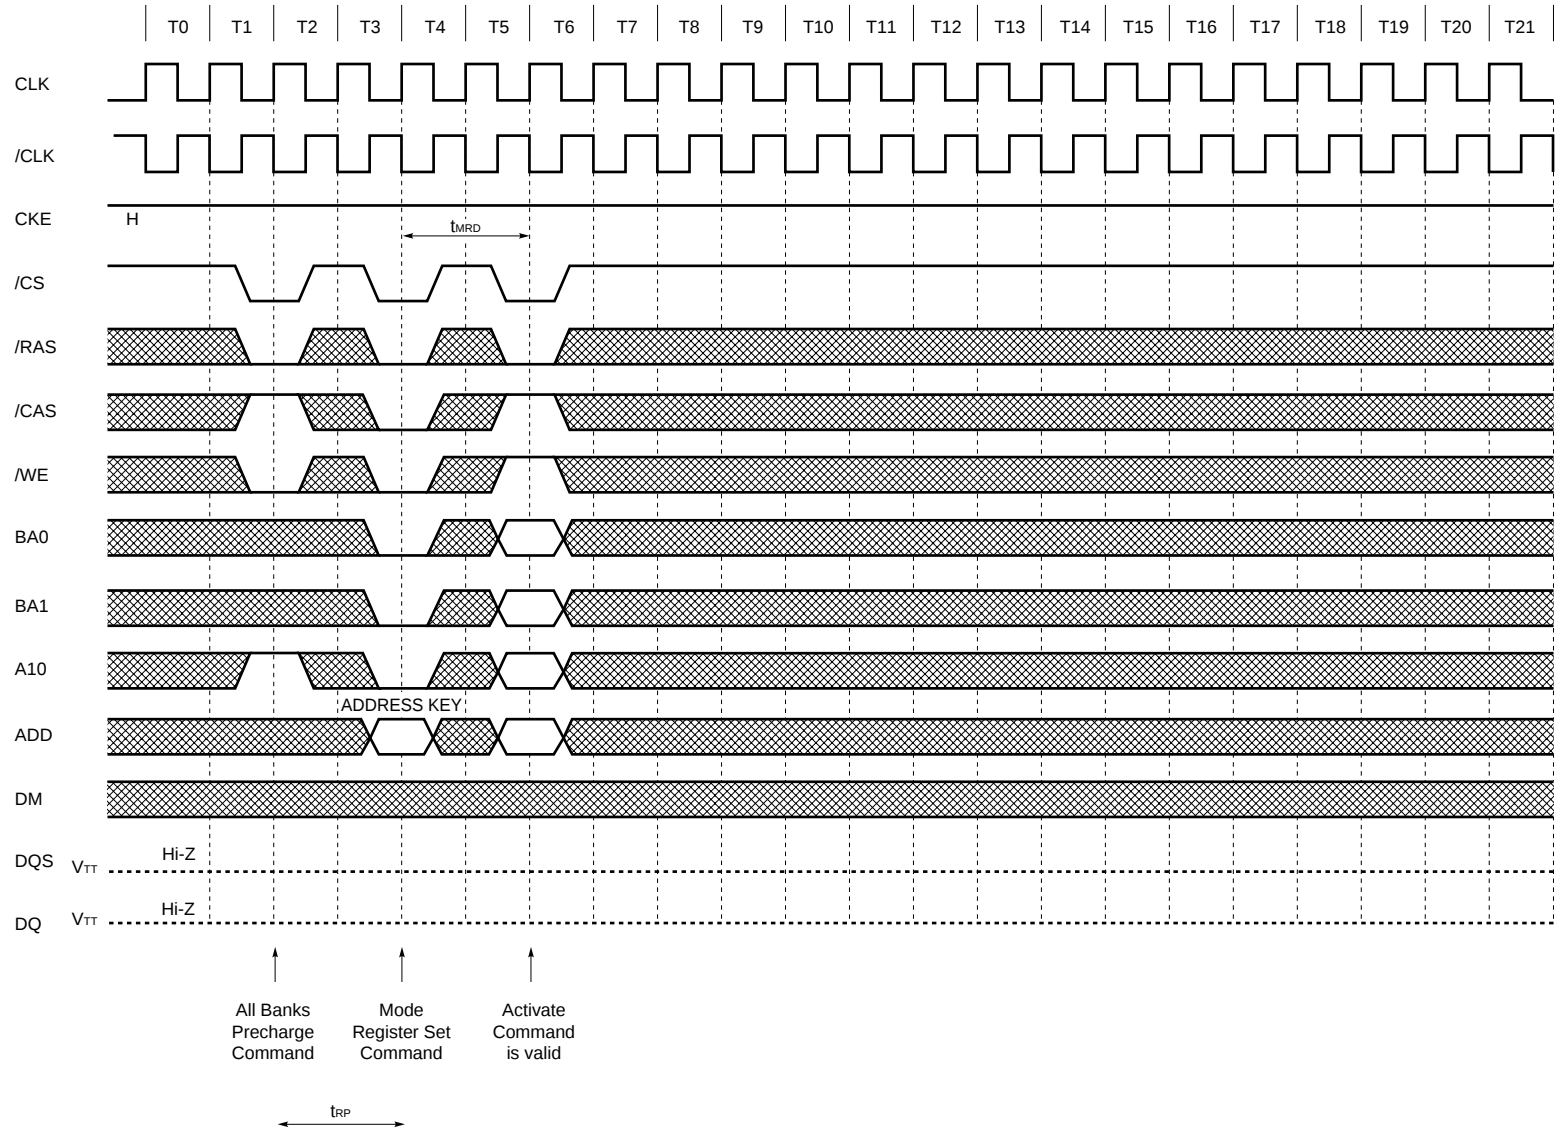


Power On Sequence and CBR (auto) Refresh

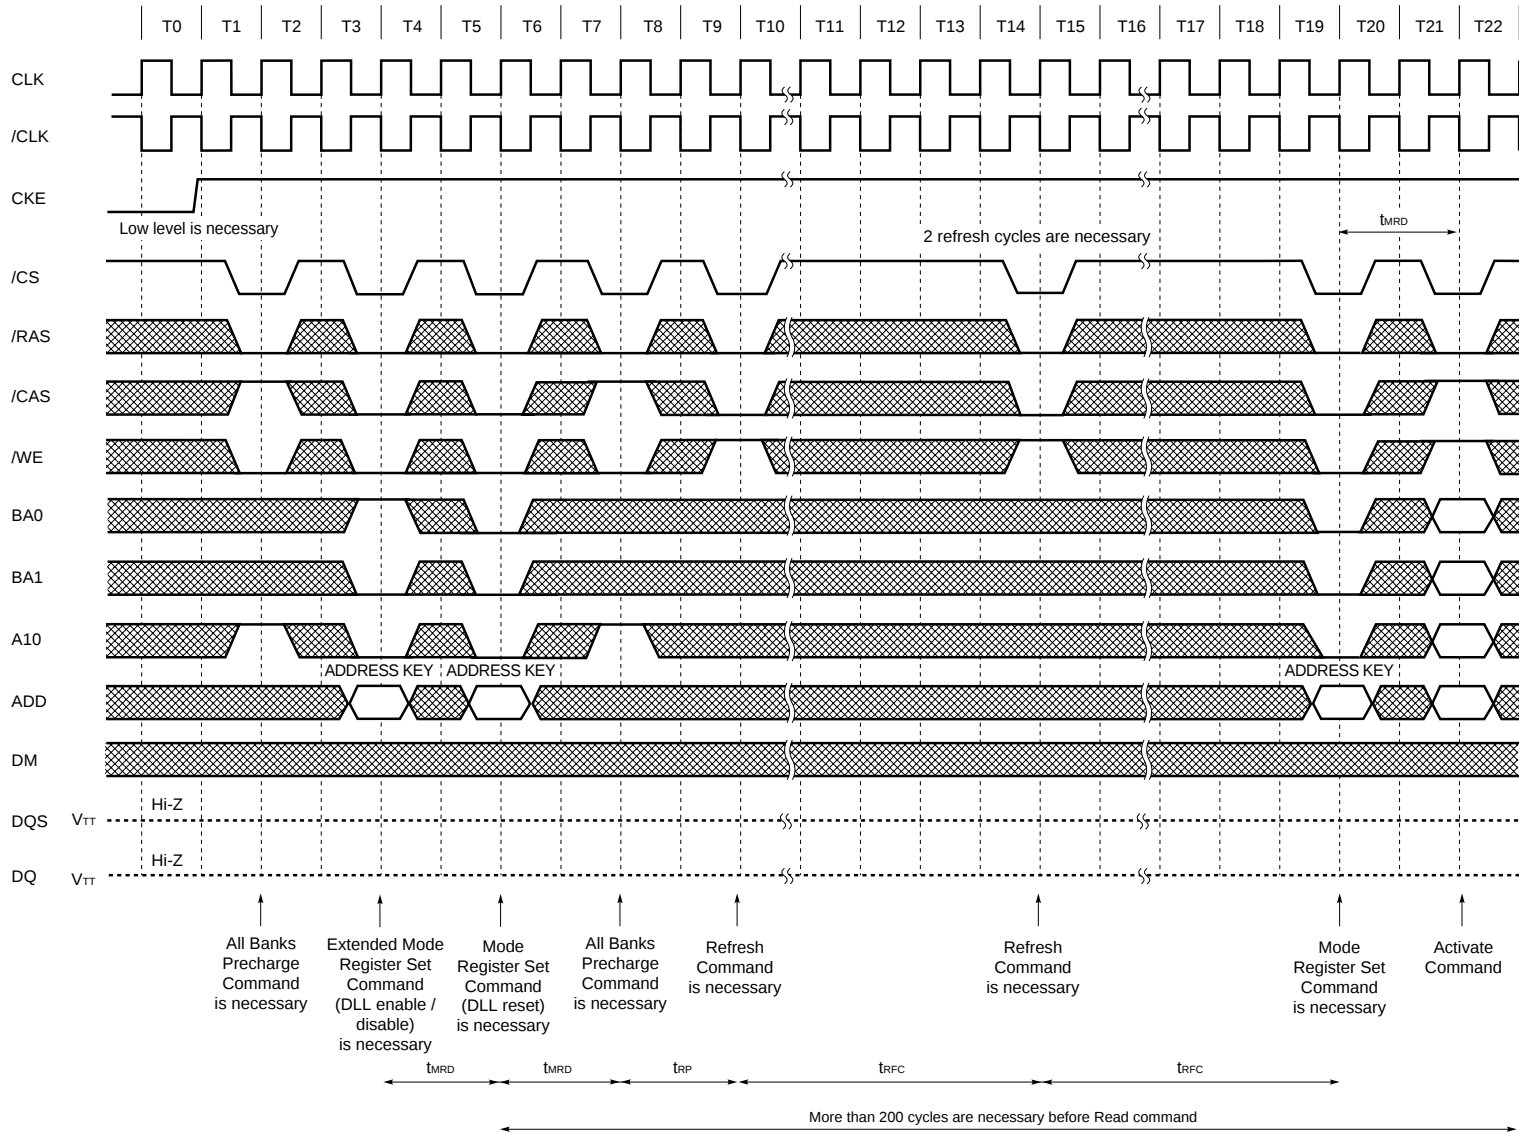


/CS Function (at 100 MHz, Burst Length = 4, /CAS Latency = 2.5)


Only /CS signal needs to be issued at minimum rate

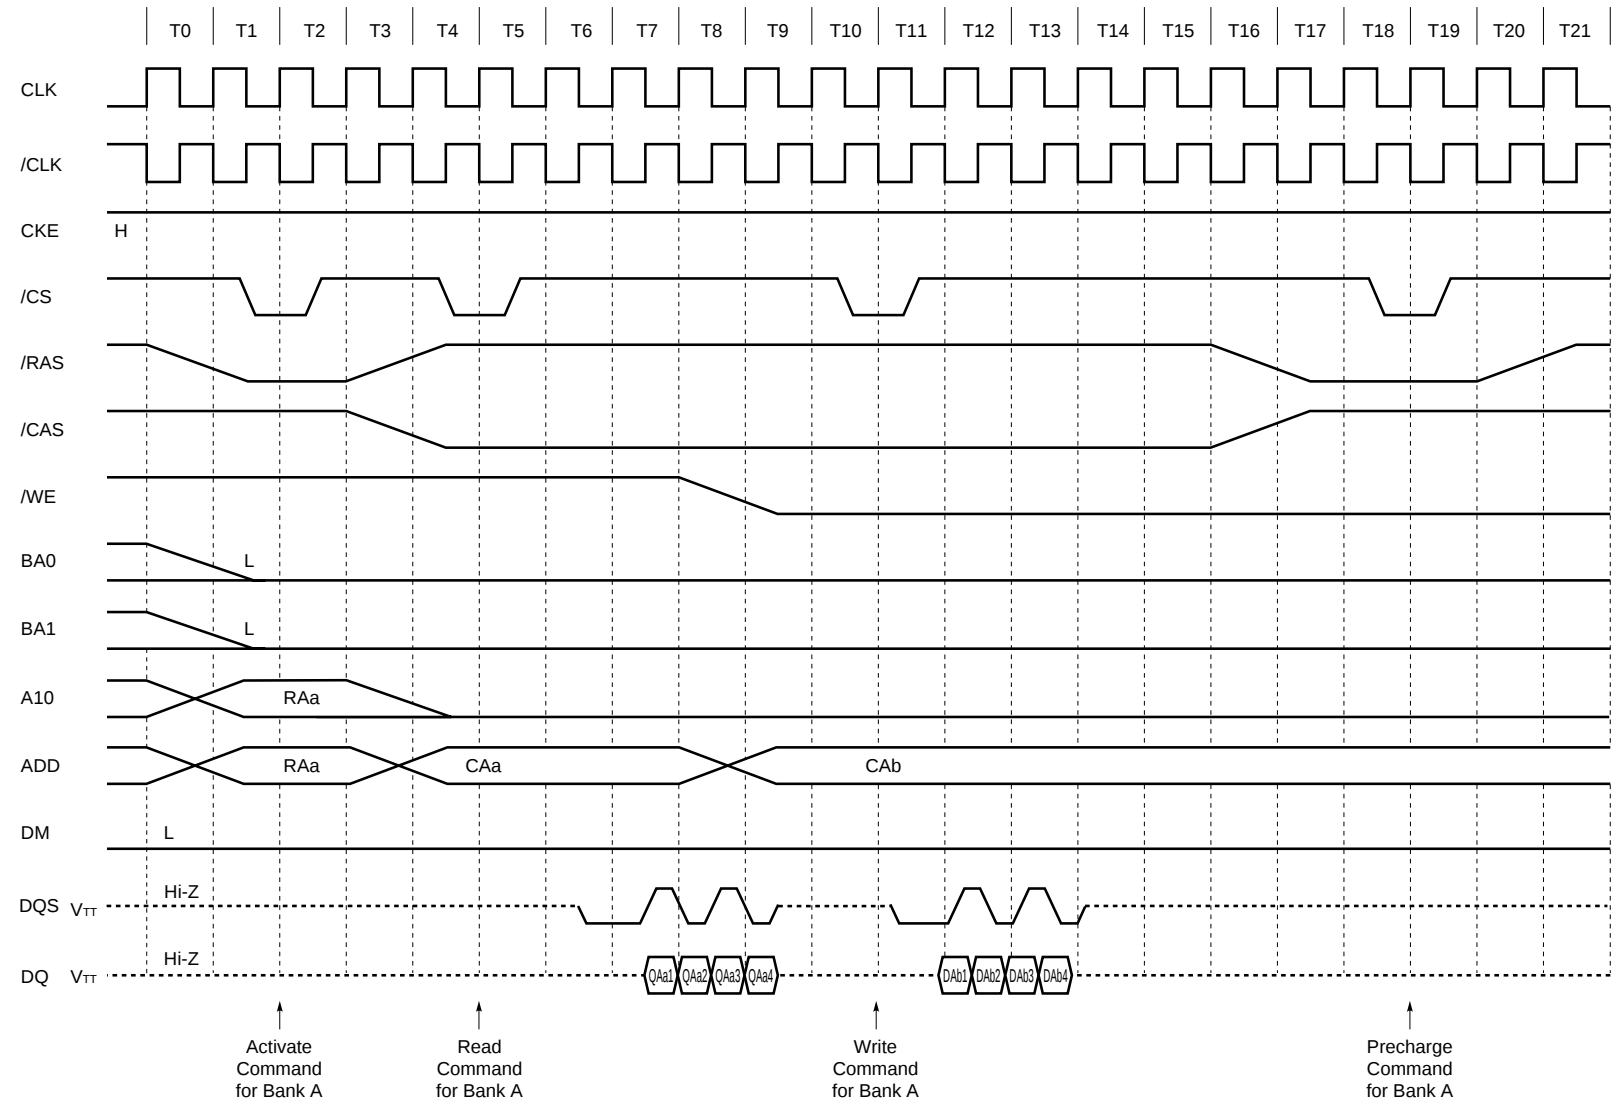


Power Down Mode (Burst Length = 4, /CAS Latency = 2)

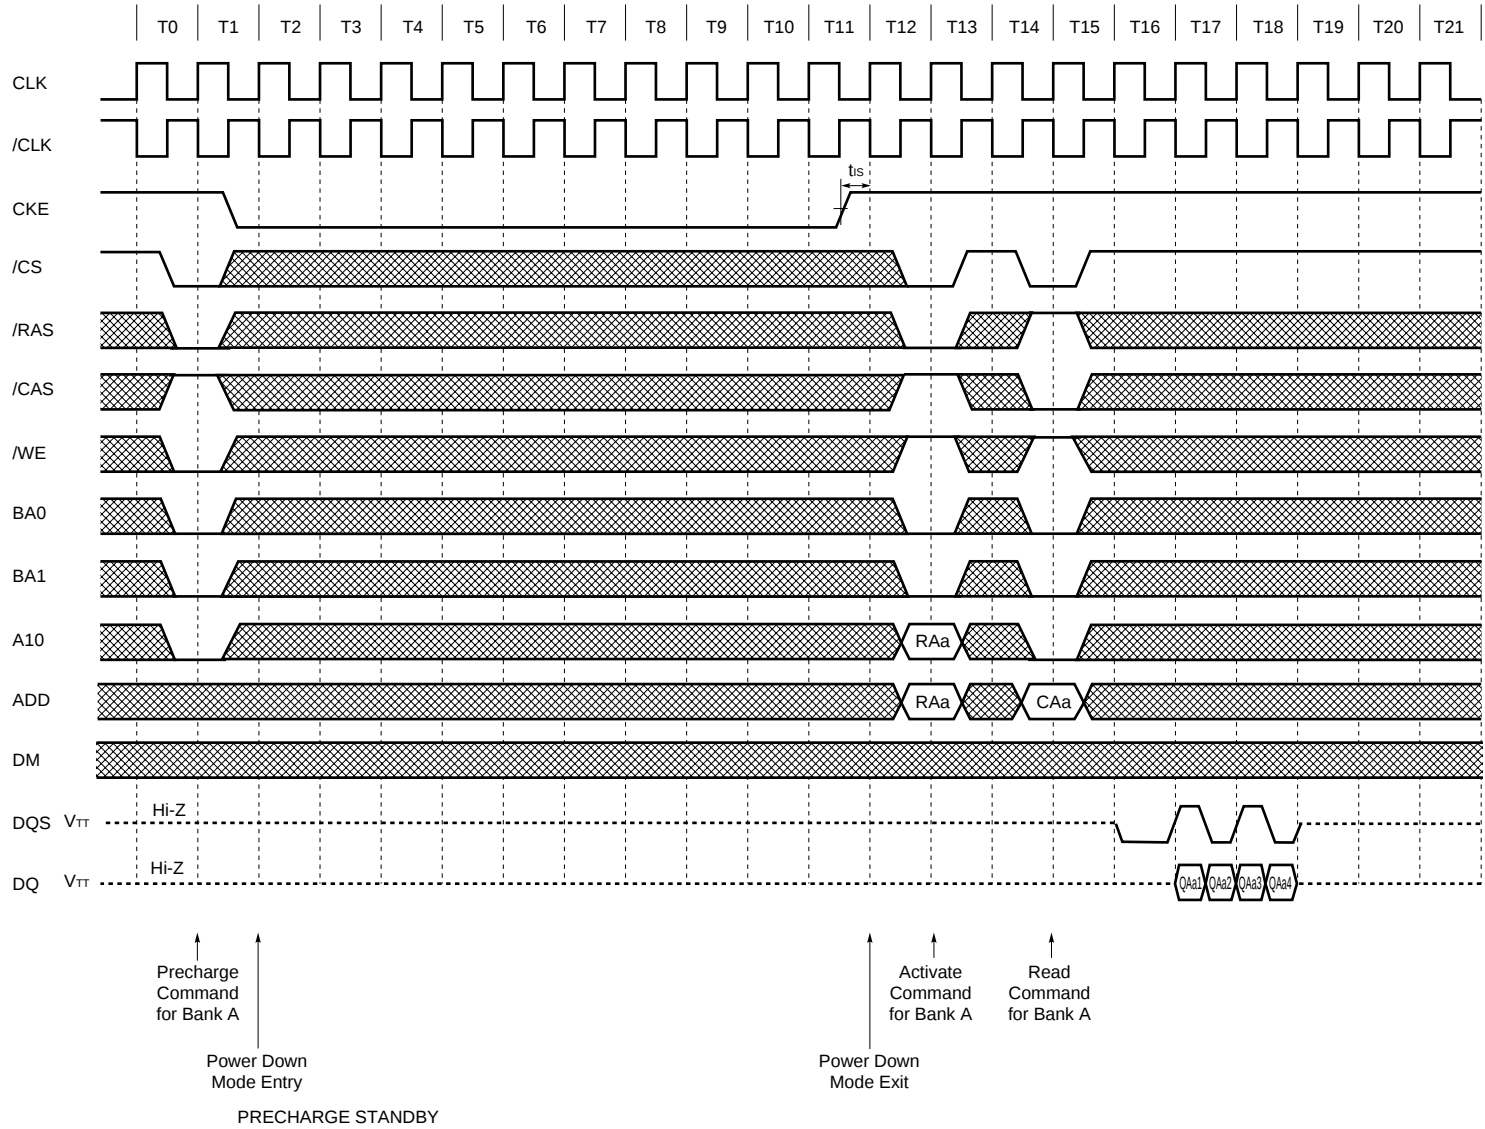


CBR (auto) Refresh

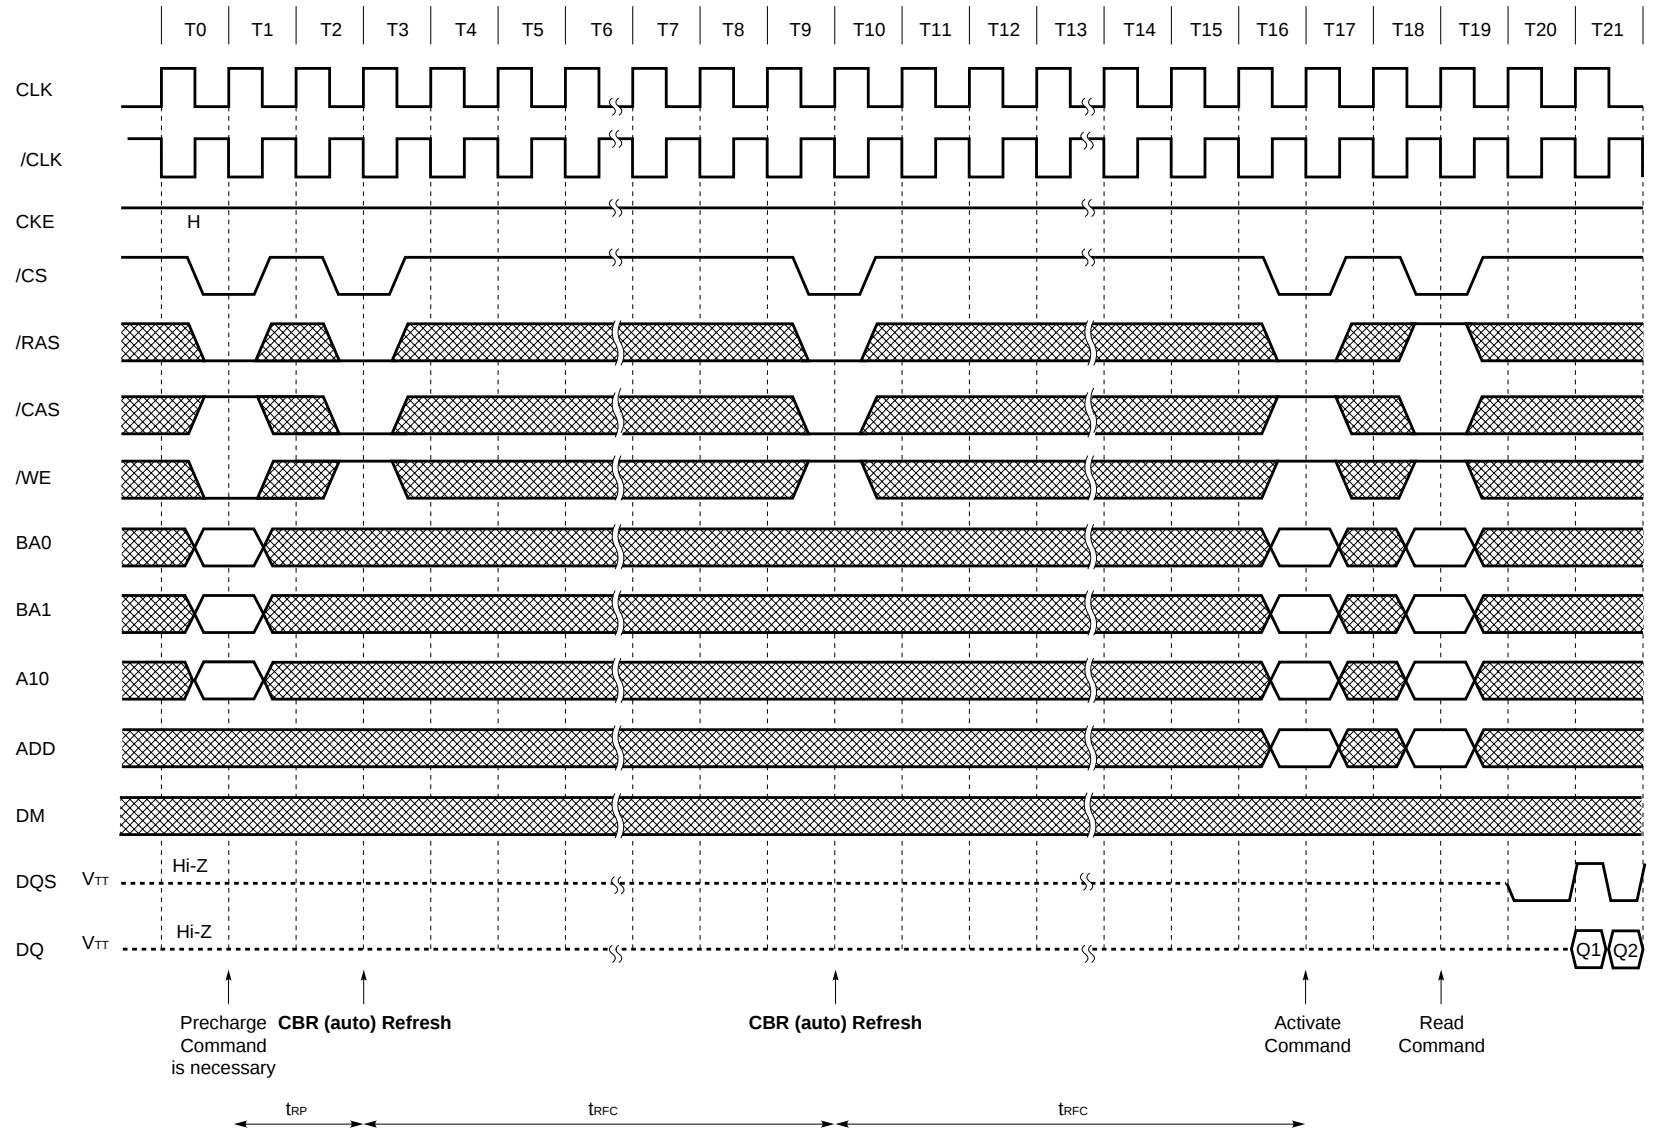


Self Refresh (Entry and Exit)

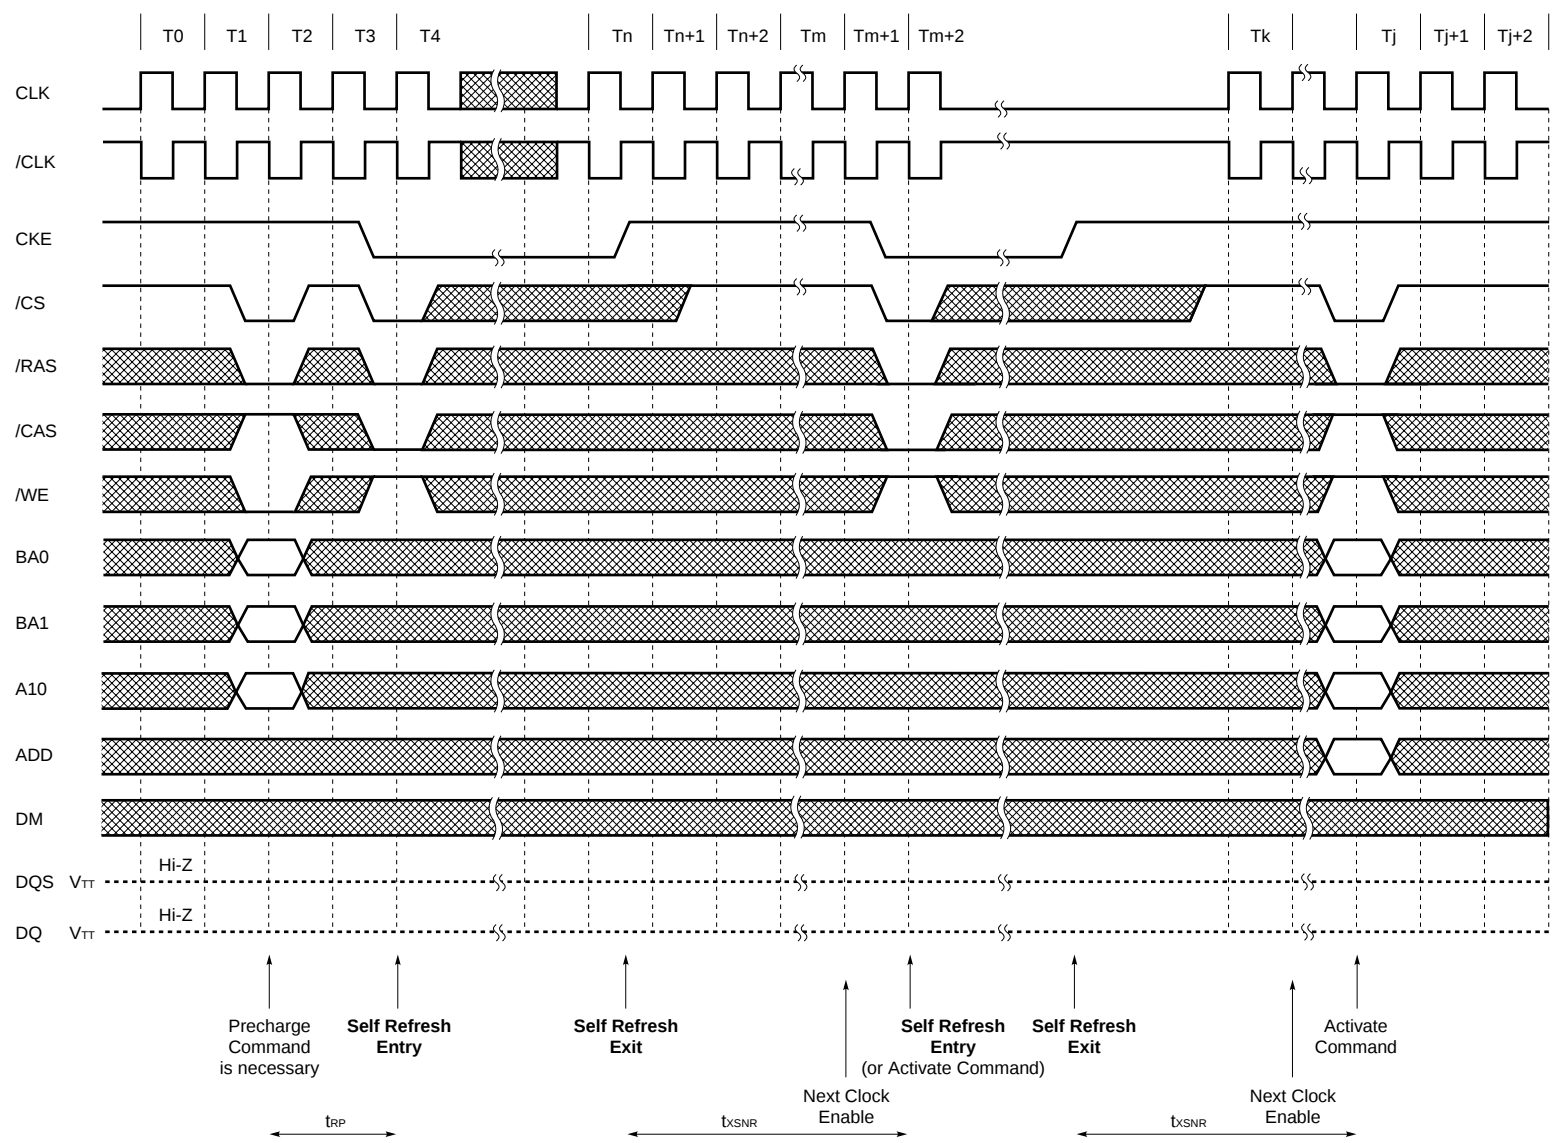


Random Column Read (Page with Same Bank) (1/2) (Burst Length = 4, /CAS Latency = 2)

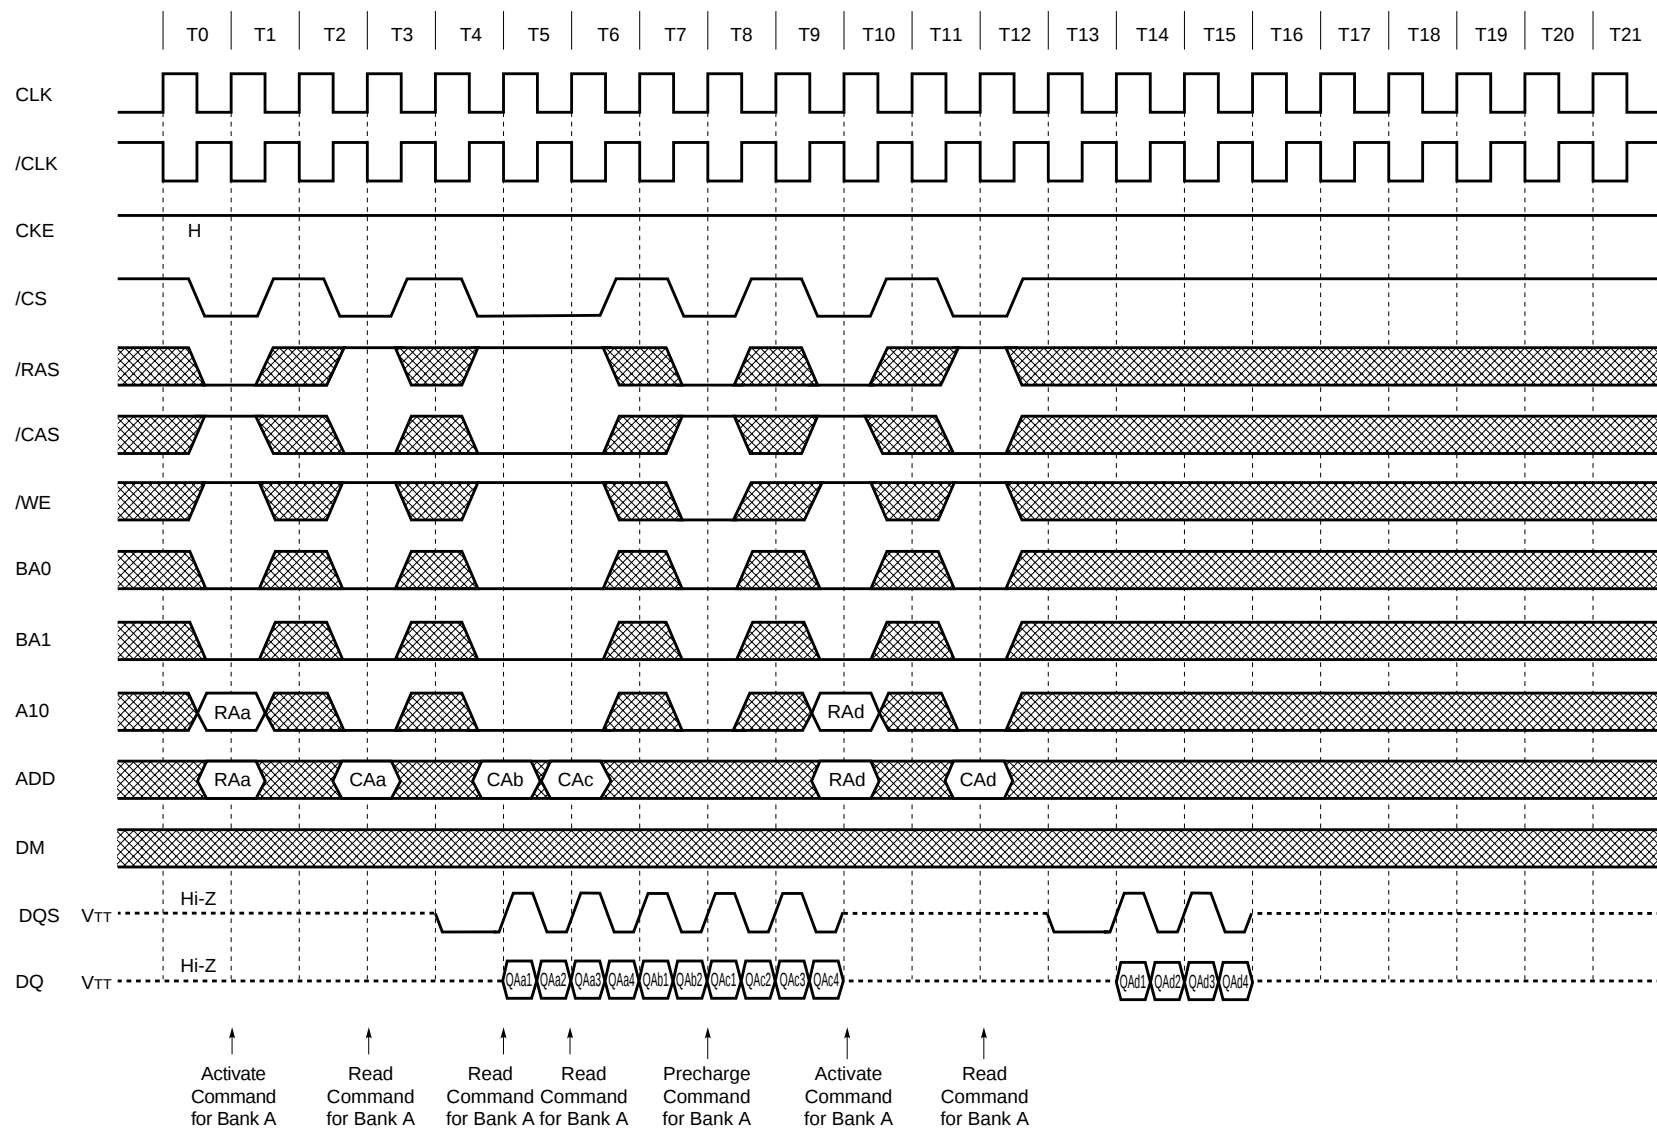


Random Column Read (Page with Same Bank) (2/2) (Burst Length = 4, /CAS Latency = 2.5)

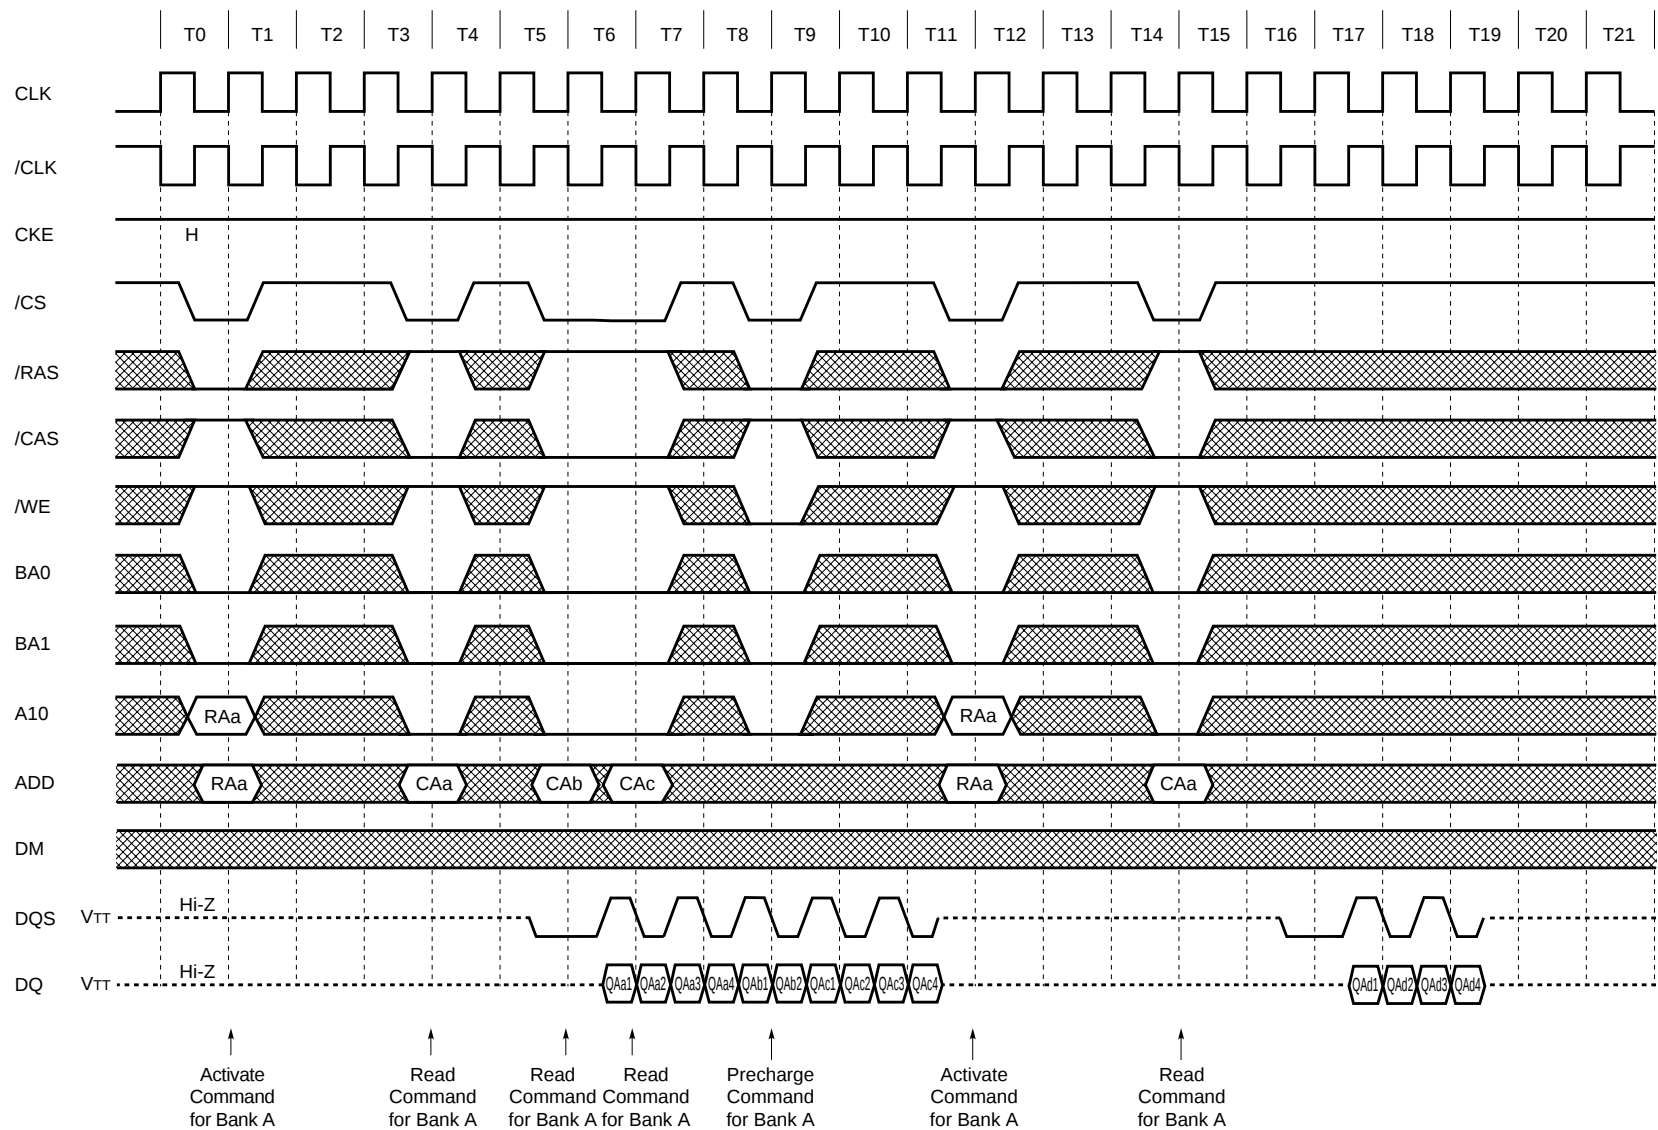


Random Column Write (Page with Same Bank) (1/2) (Burst Length = 4, /CAS Latency = 2)

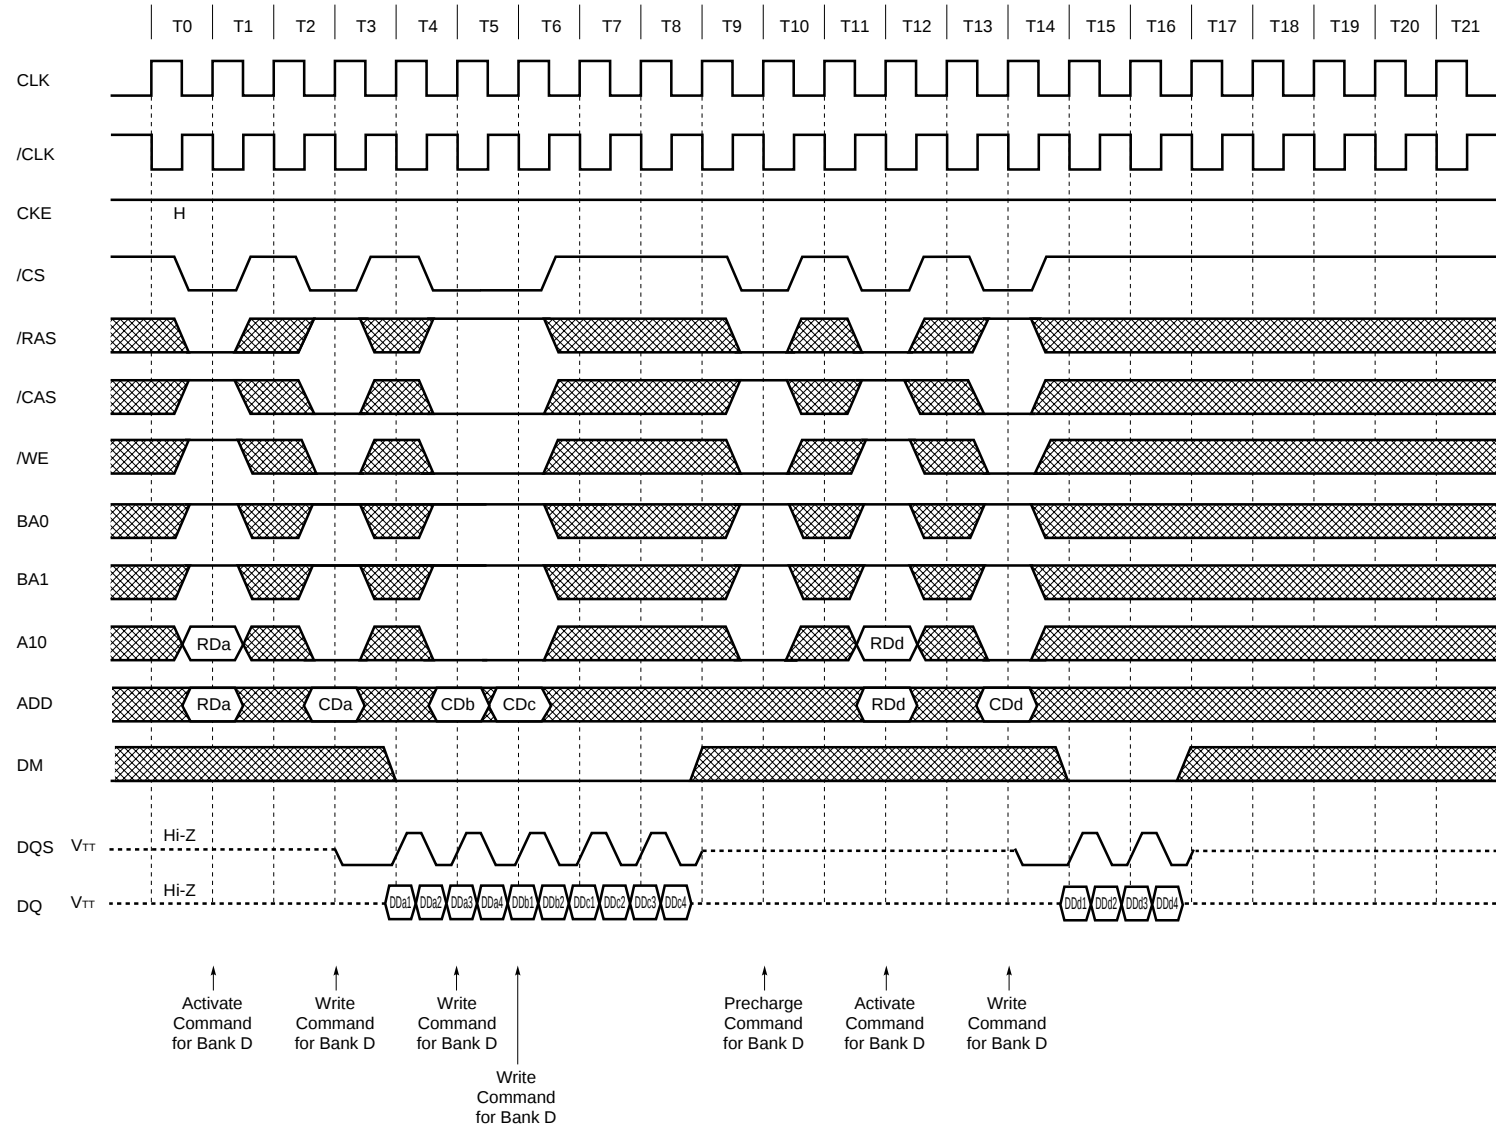


Random Column Write (Page with Same Bank) (2/2) (Burst Length = 4, /CAS Latency = 2.5)

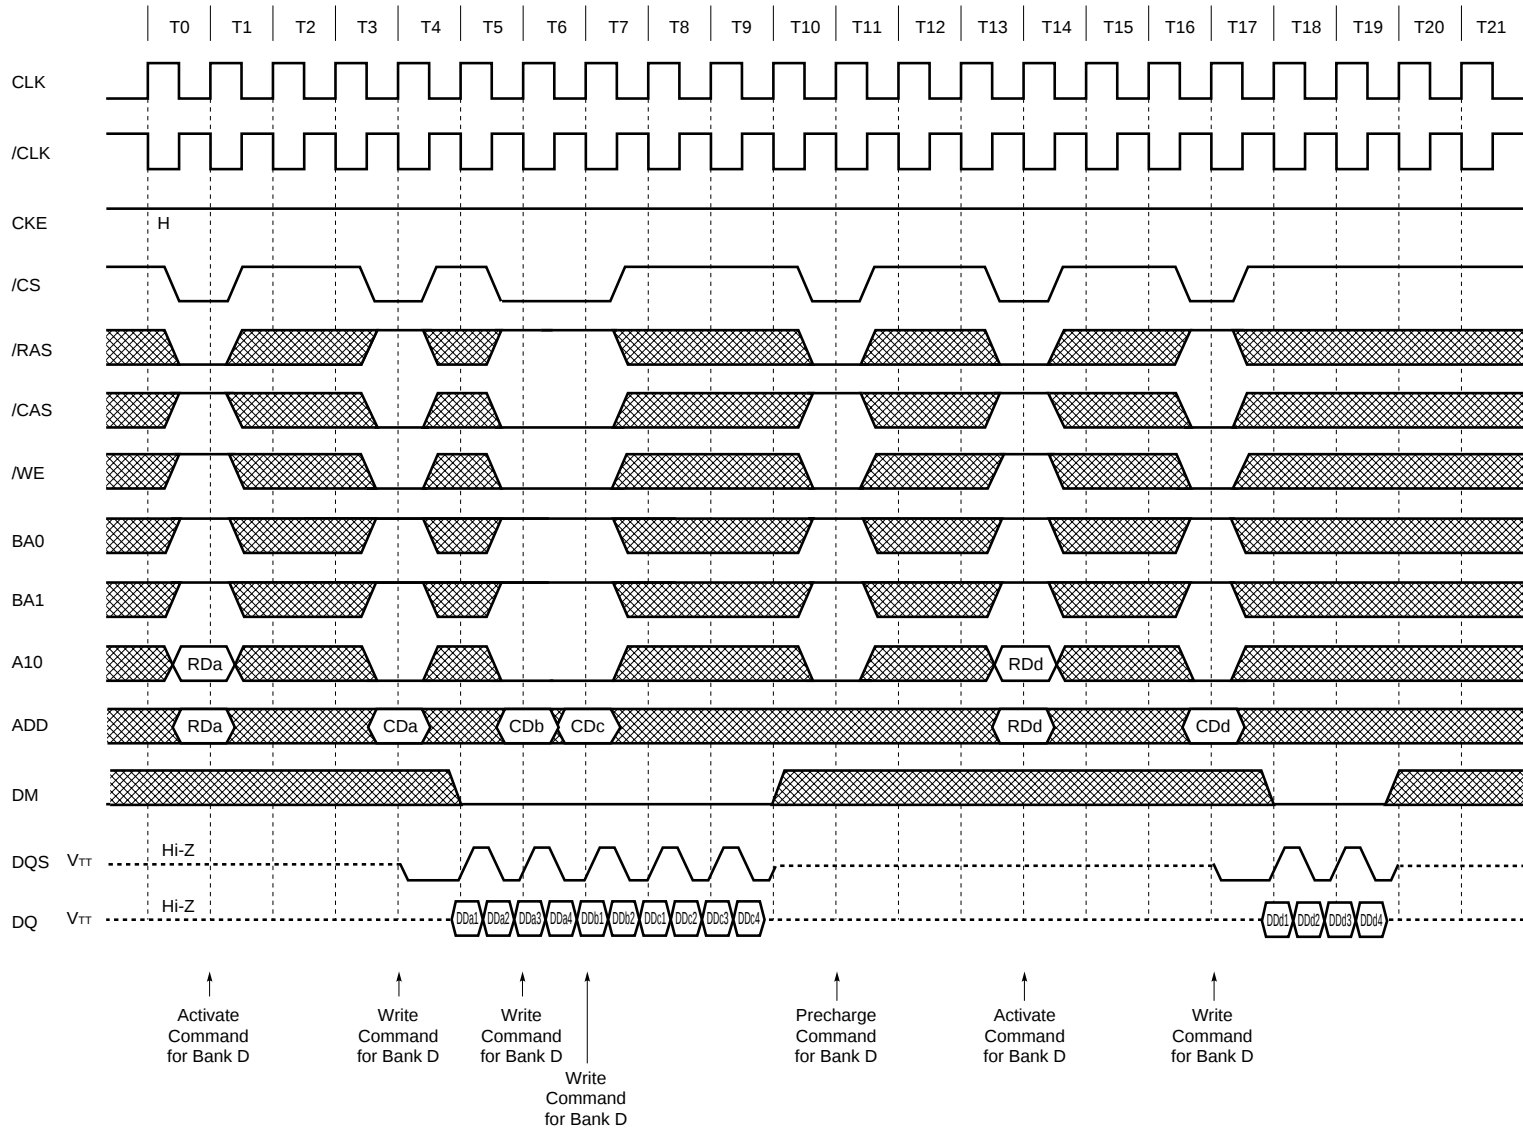


Random Row Read (Ping-Pong Banks) (1/2) (Burst Length = 8, /CAS Latency = 2)

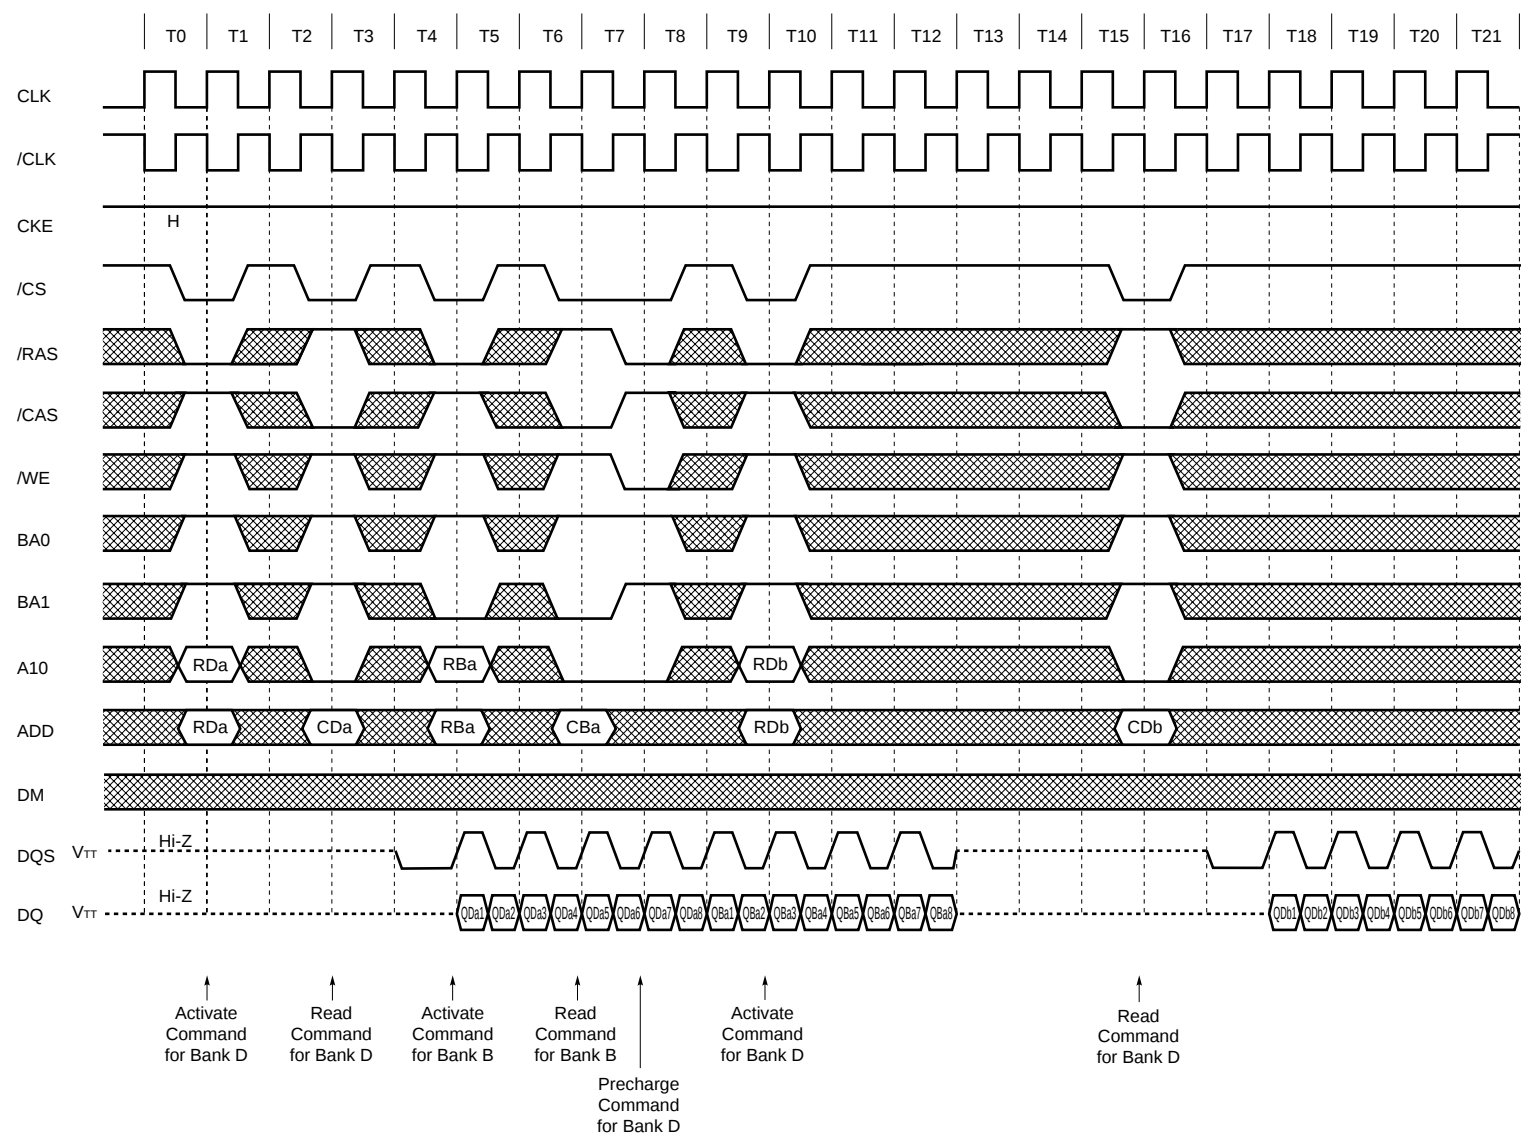


Random Row Read (Ping-Pong Banks) (2/2) (Burst Length = 8, /CAS Latency = 2.5)

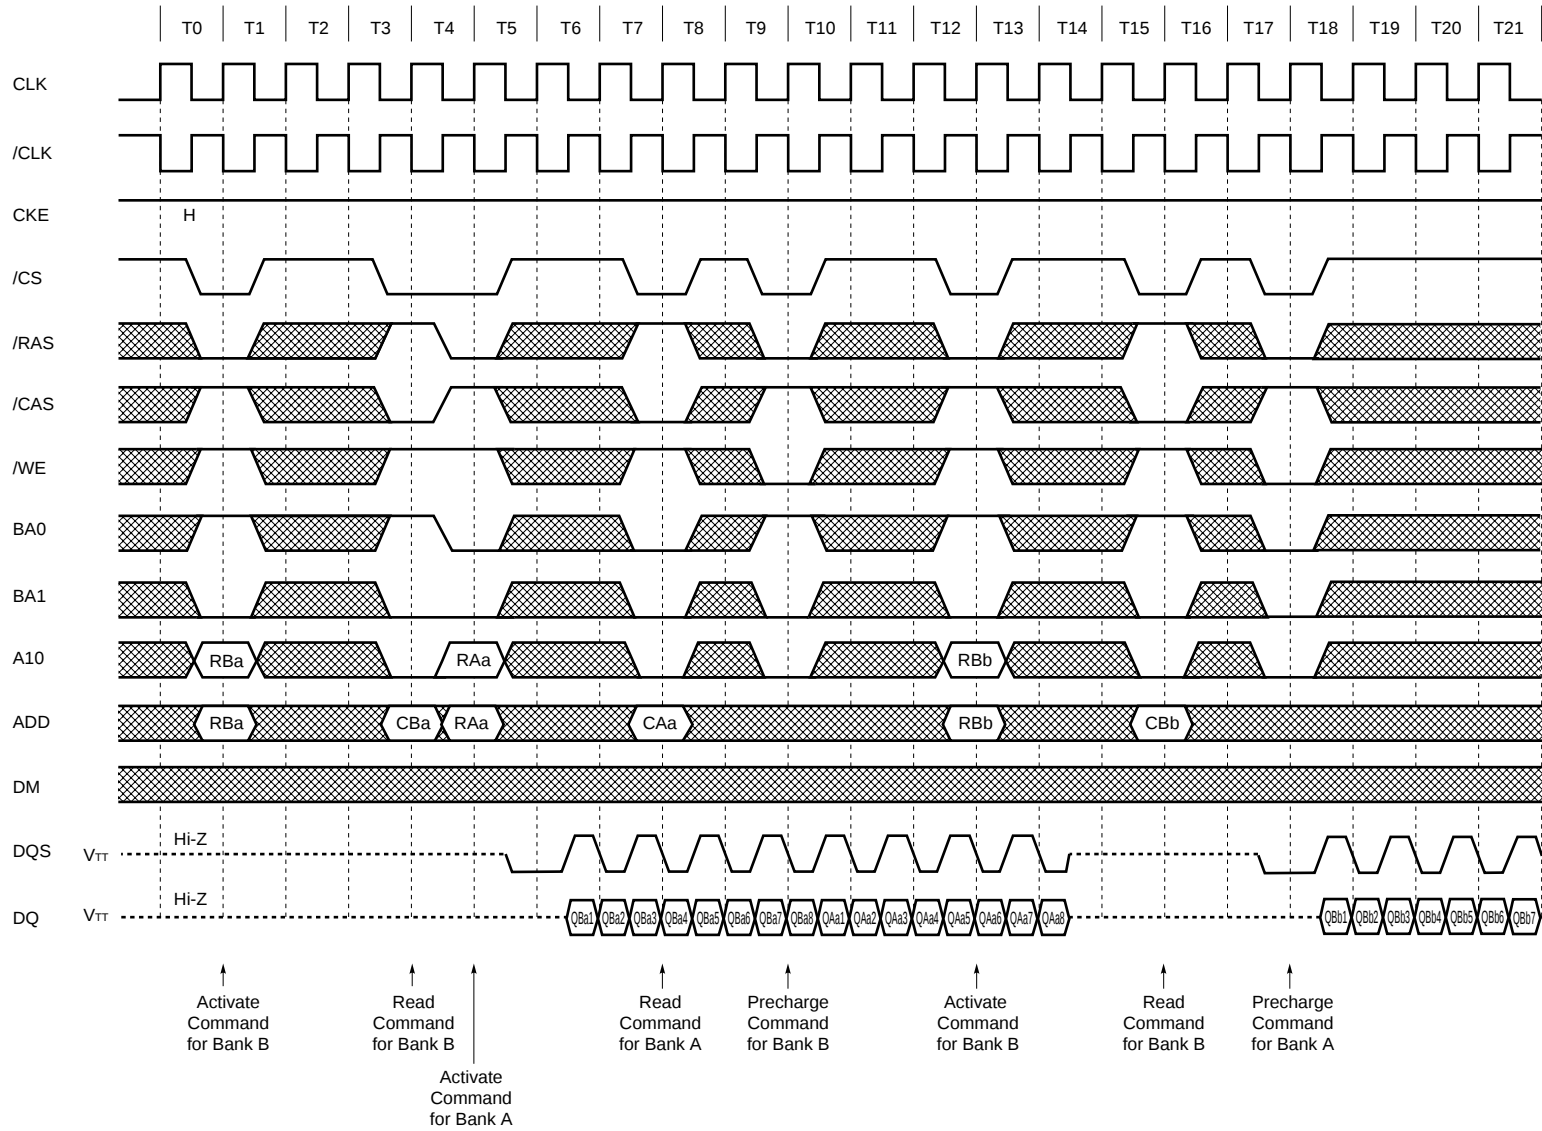


Random Row Write (Ping-Pong Banks) (1/2) (Burst Length = 8, /CAS Latency = 2)

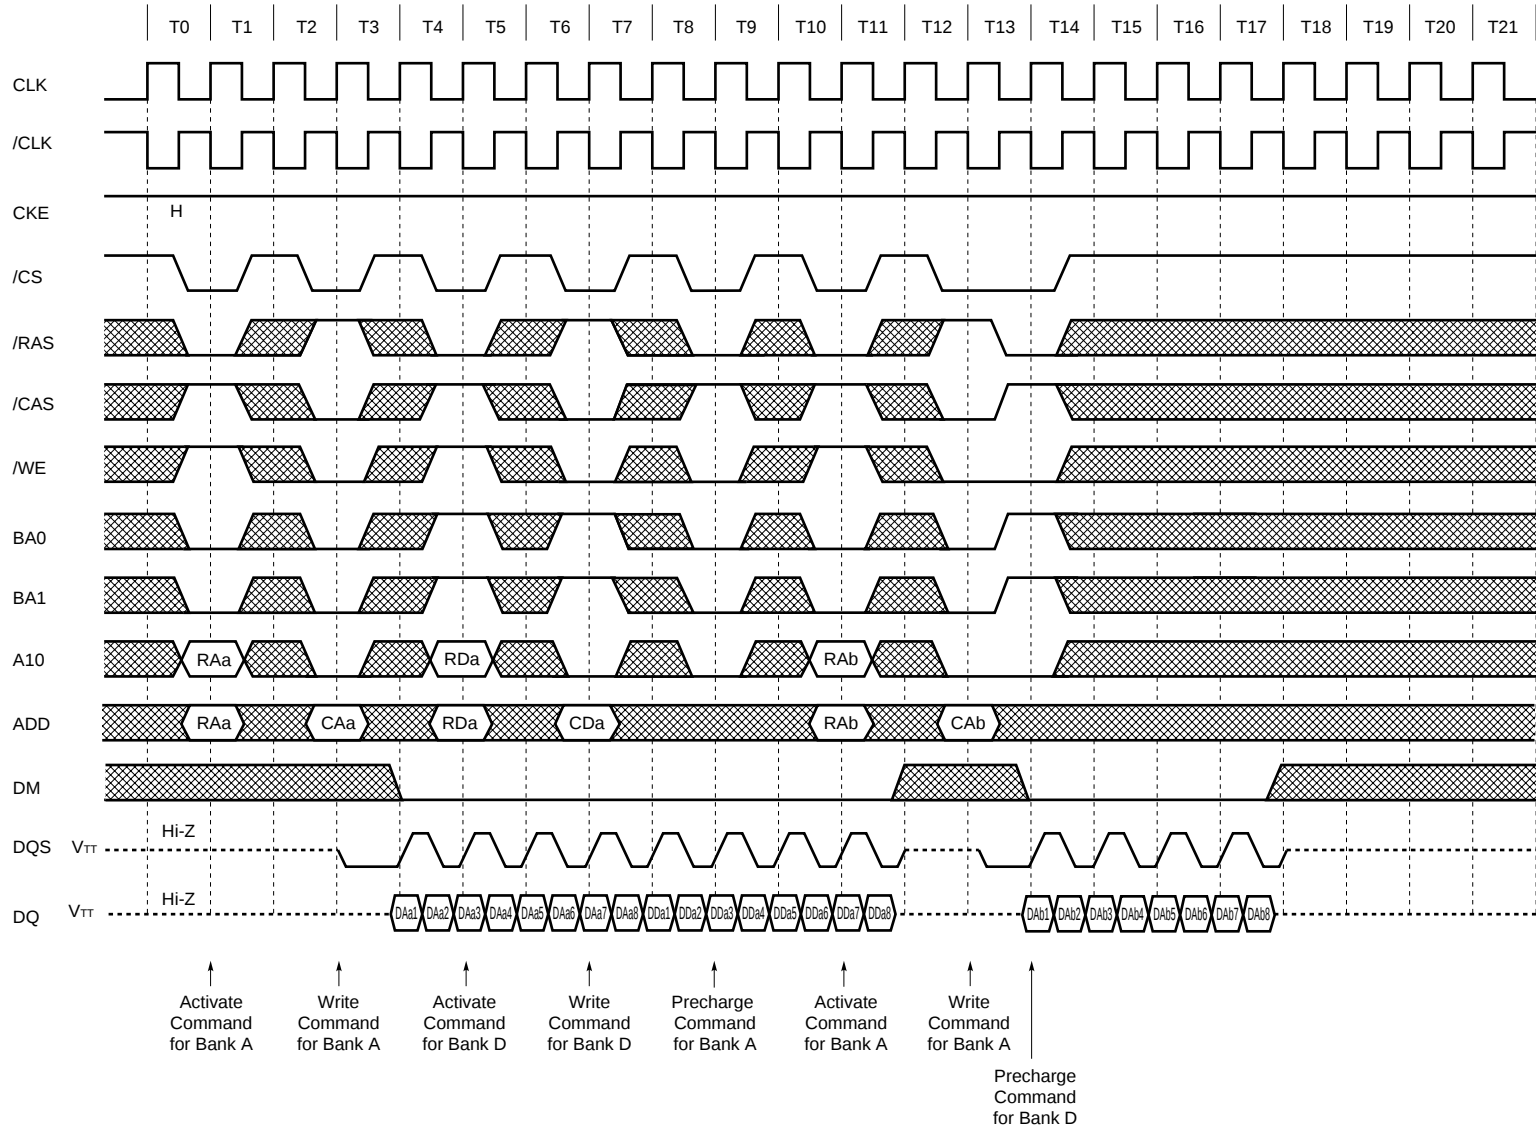


Random Row Write (Ping-Pong Banks) (2/2) (Burst Length = 8, /CAS Latency = 2.5)

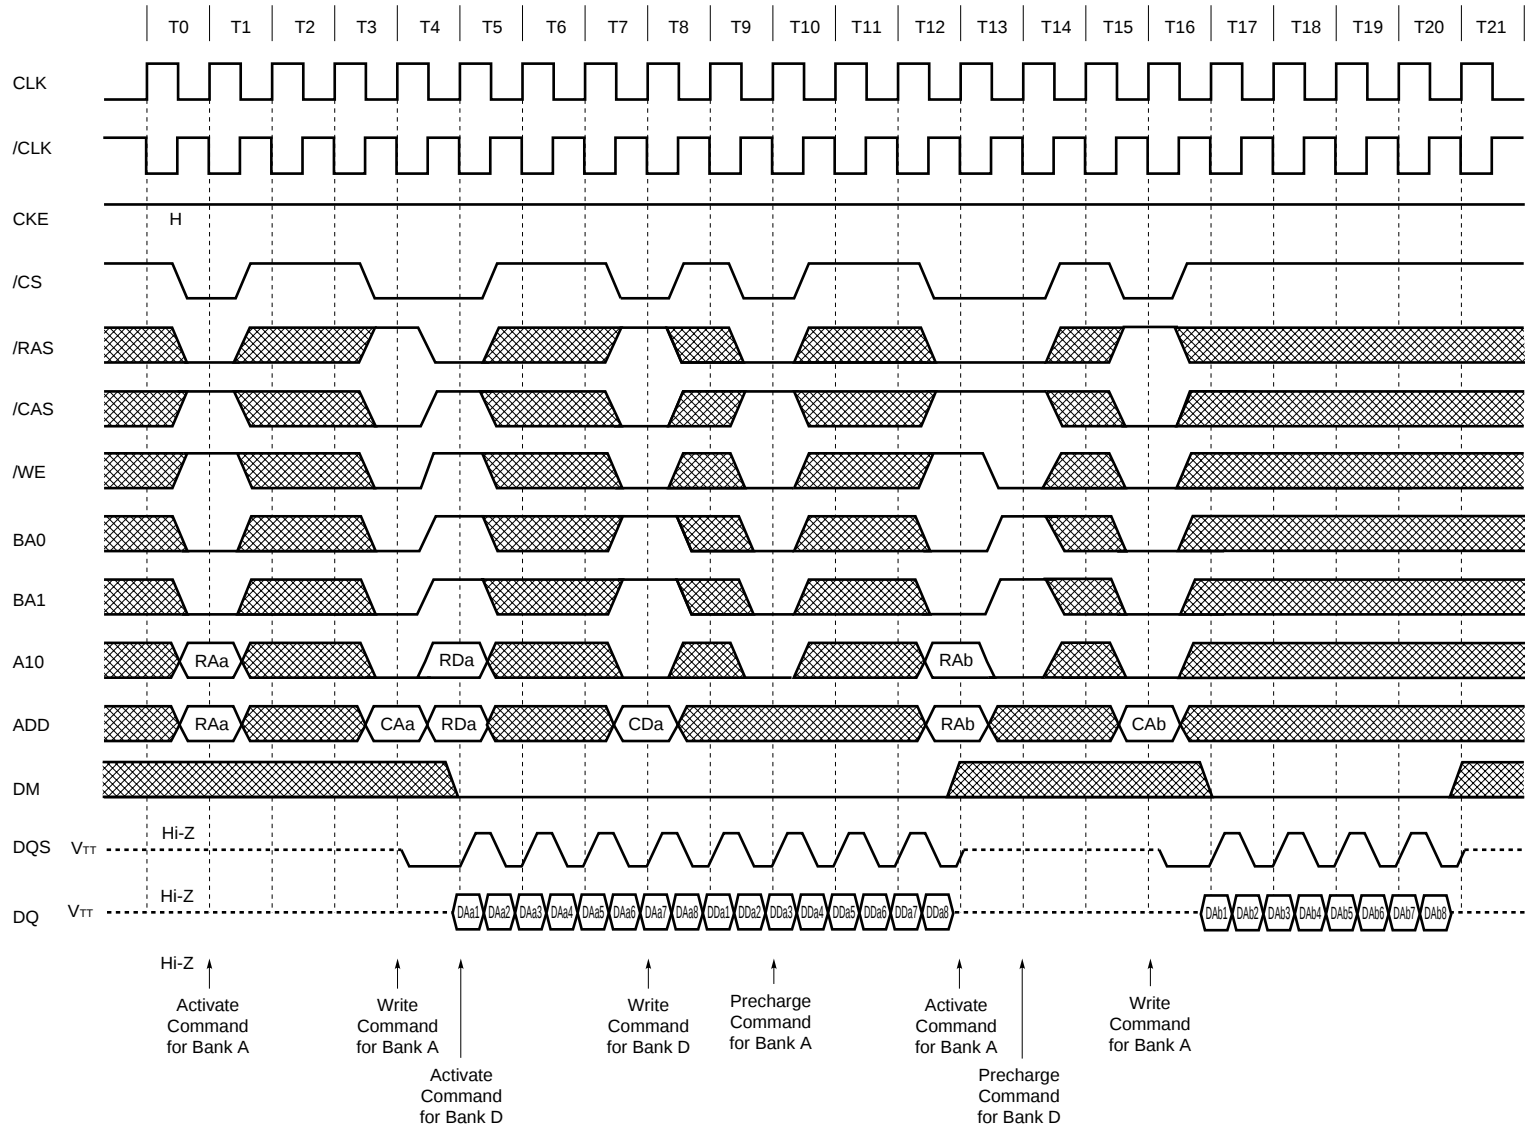


Read and Write (1/2) (Burst Length = 8, /CAS Latency = 2)

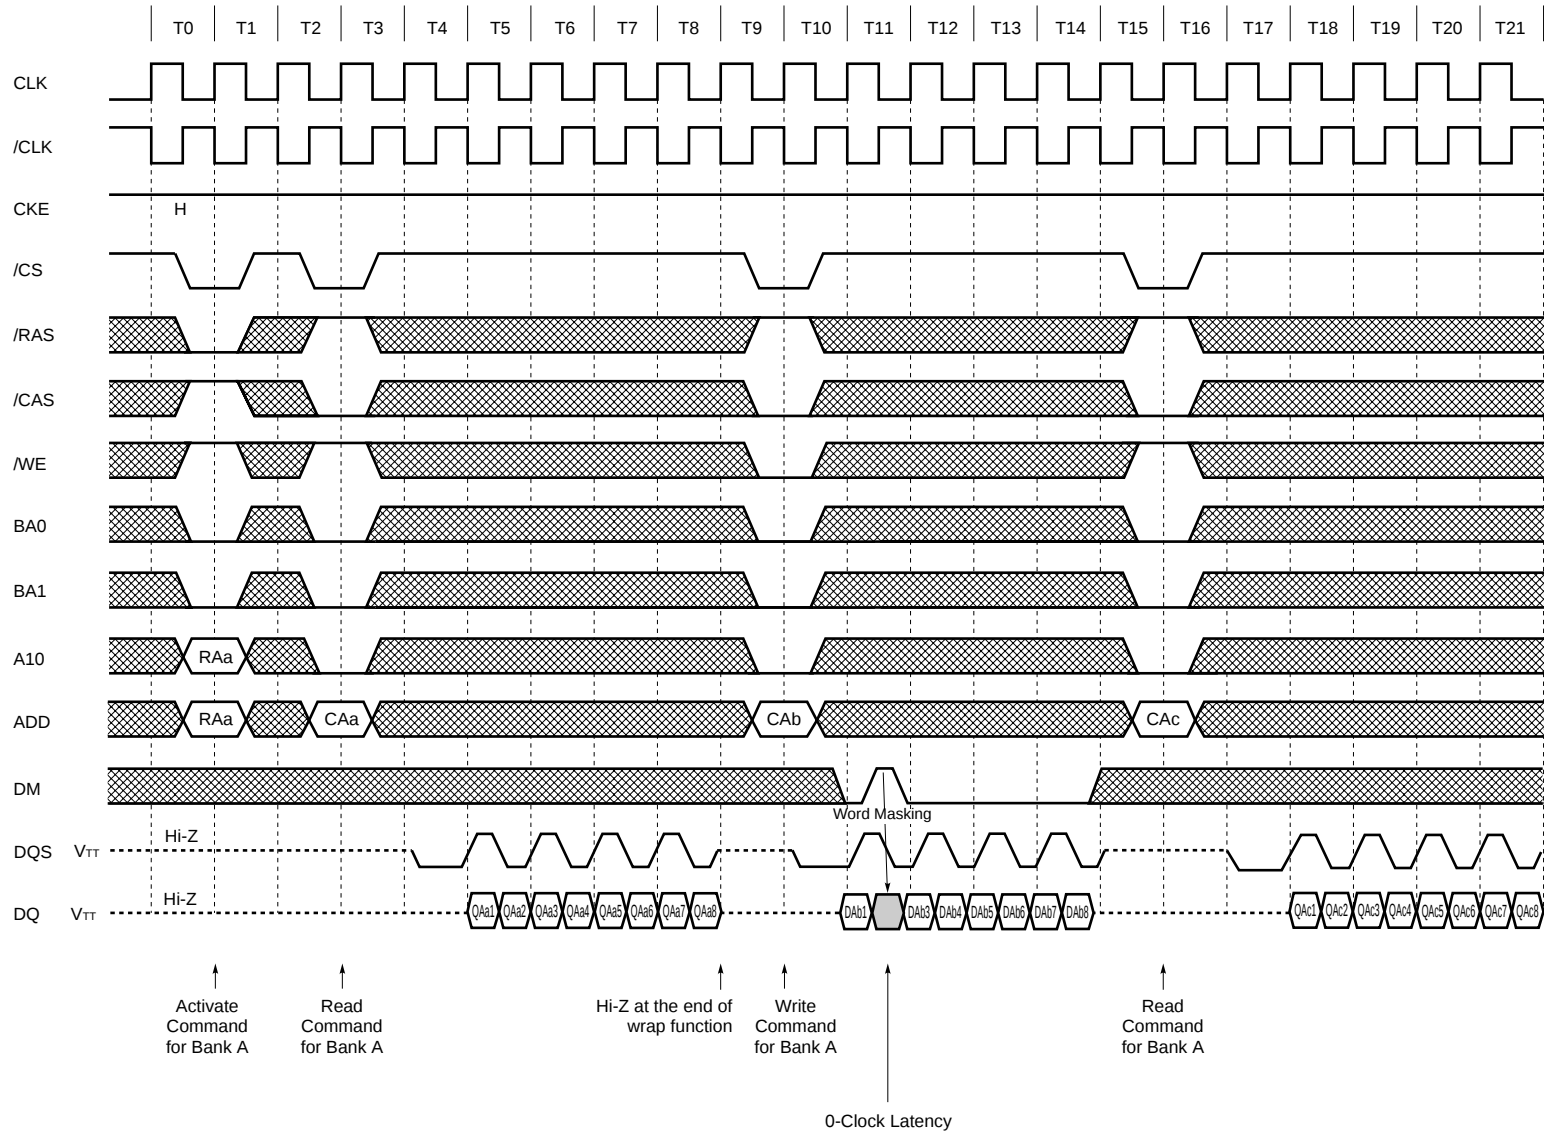


Read and Write (2/2) (Burst Length = 8, /CAS Latency = 2.5)

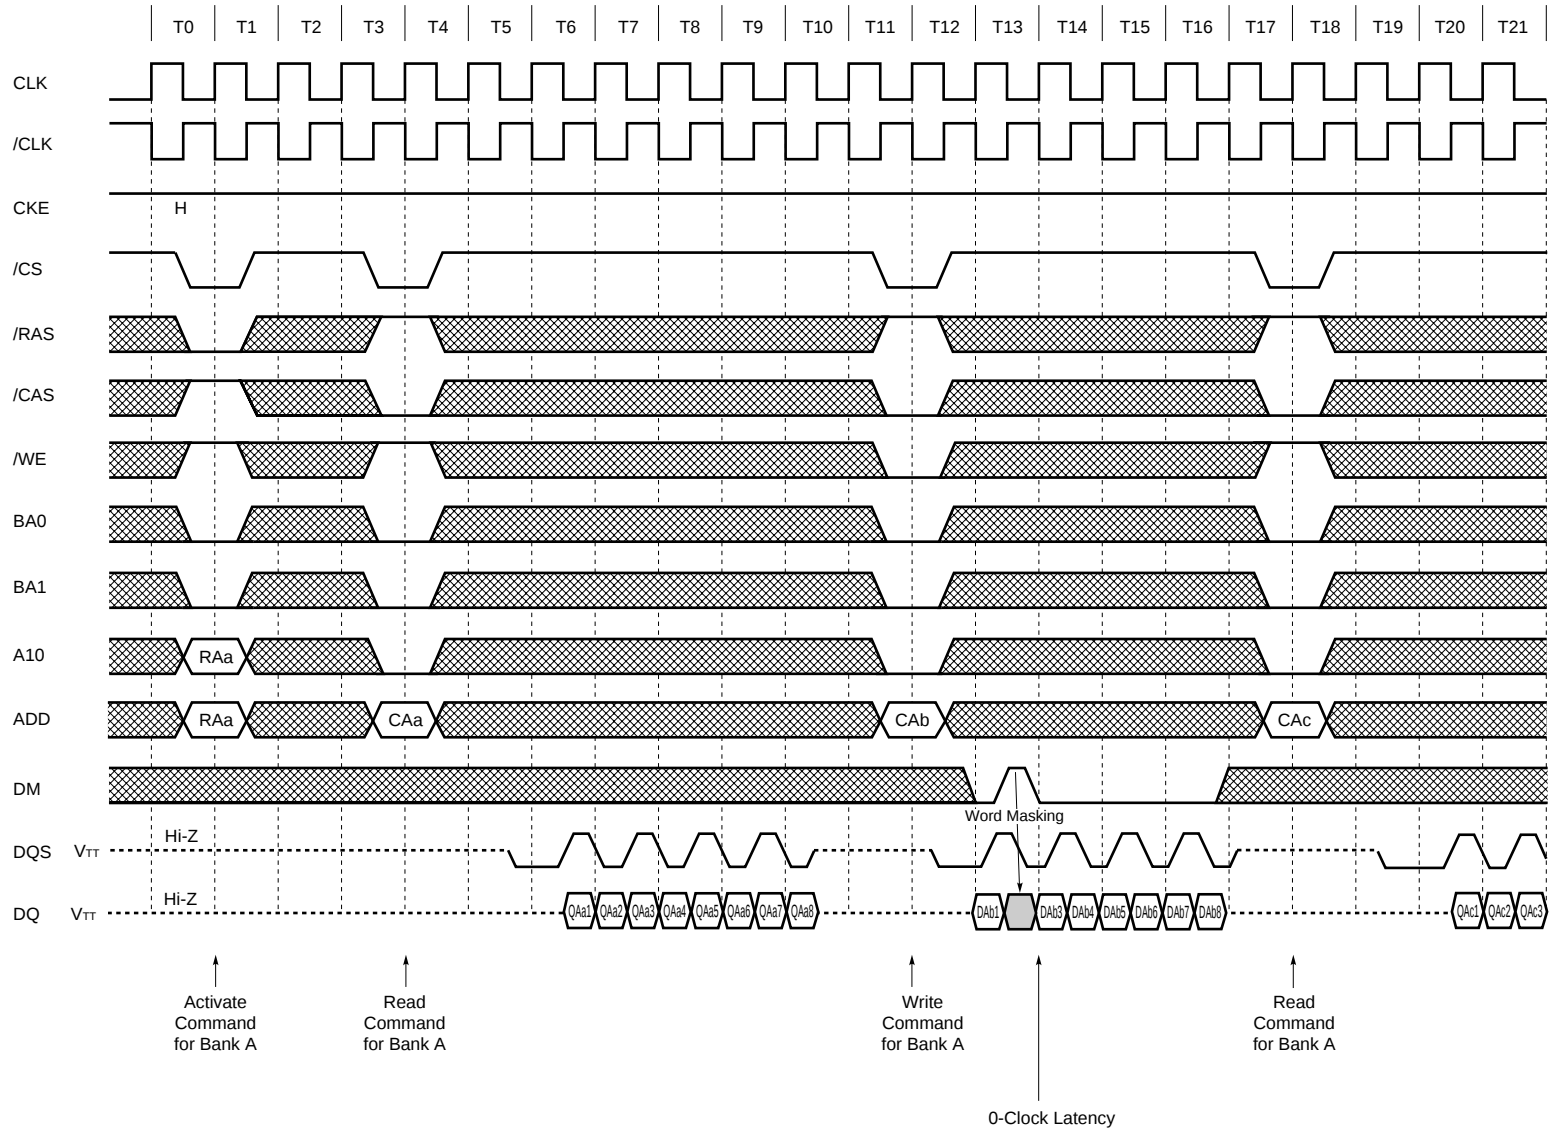


Interleaved Column Read Cycle (1/2) (Burst Length = 8, /CAS Latency = 2)

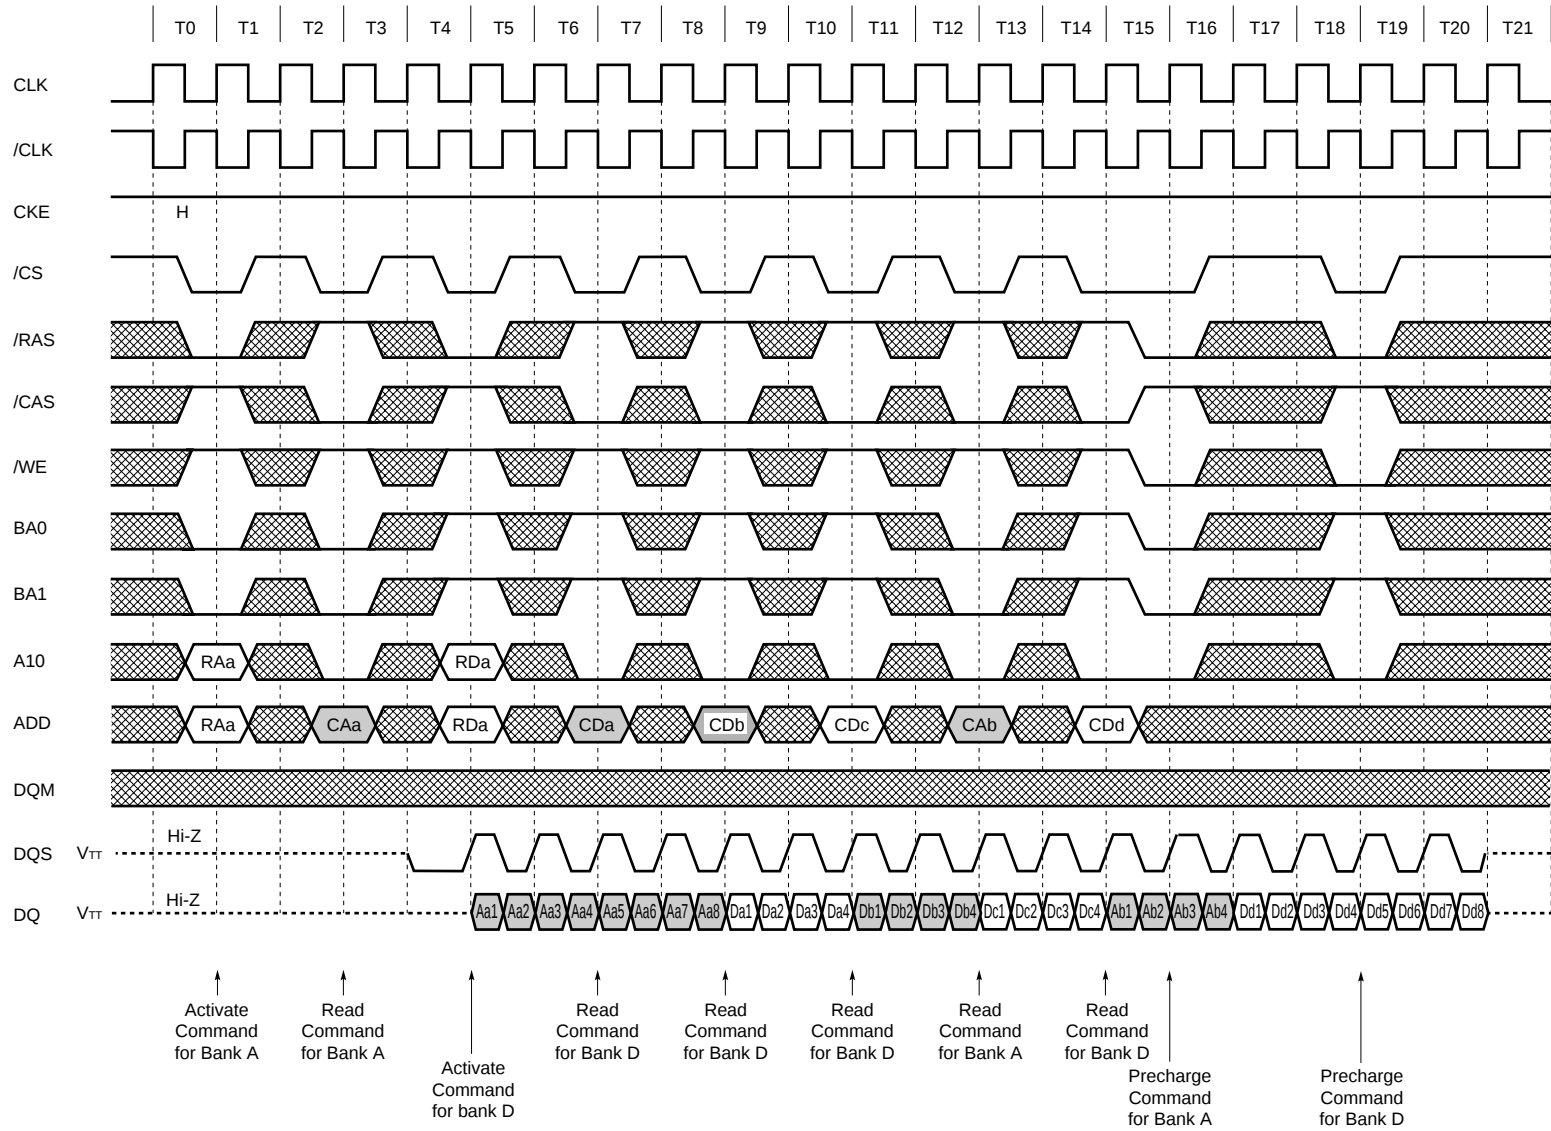


Interleaved Column Read Cycle (2/2) (Burst Length = 8, /CAS Latency = 2.5)

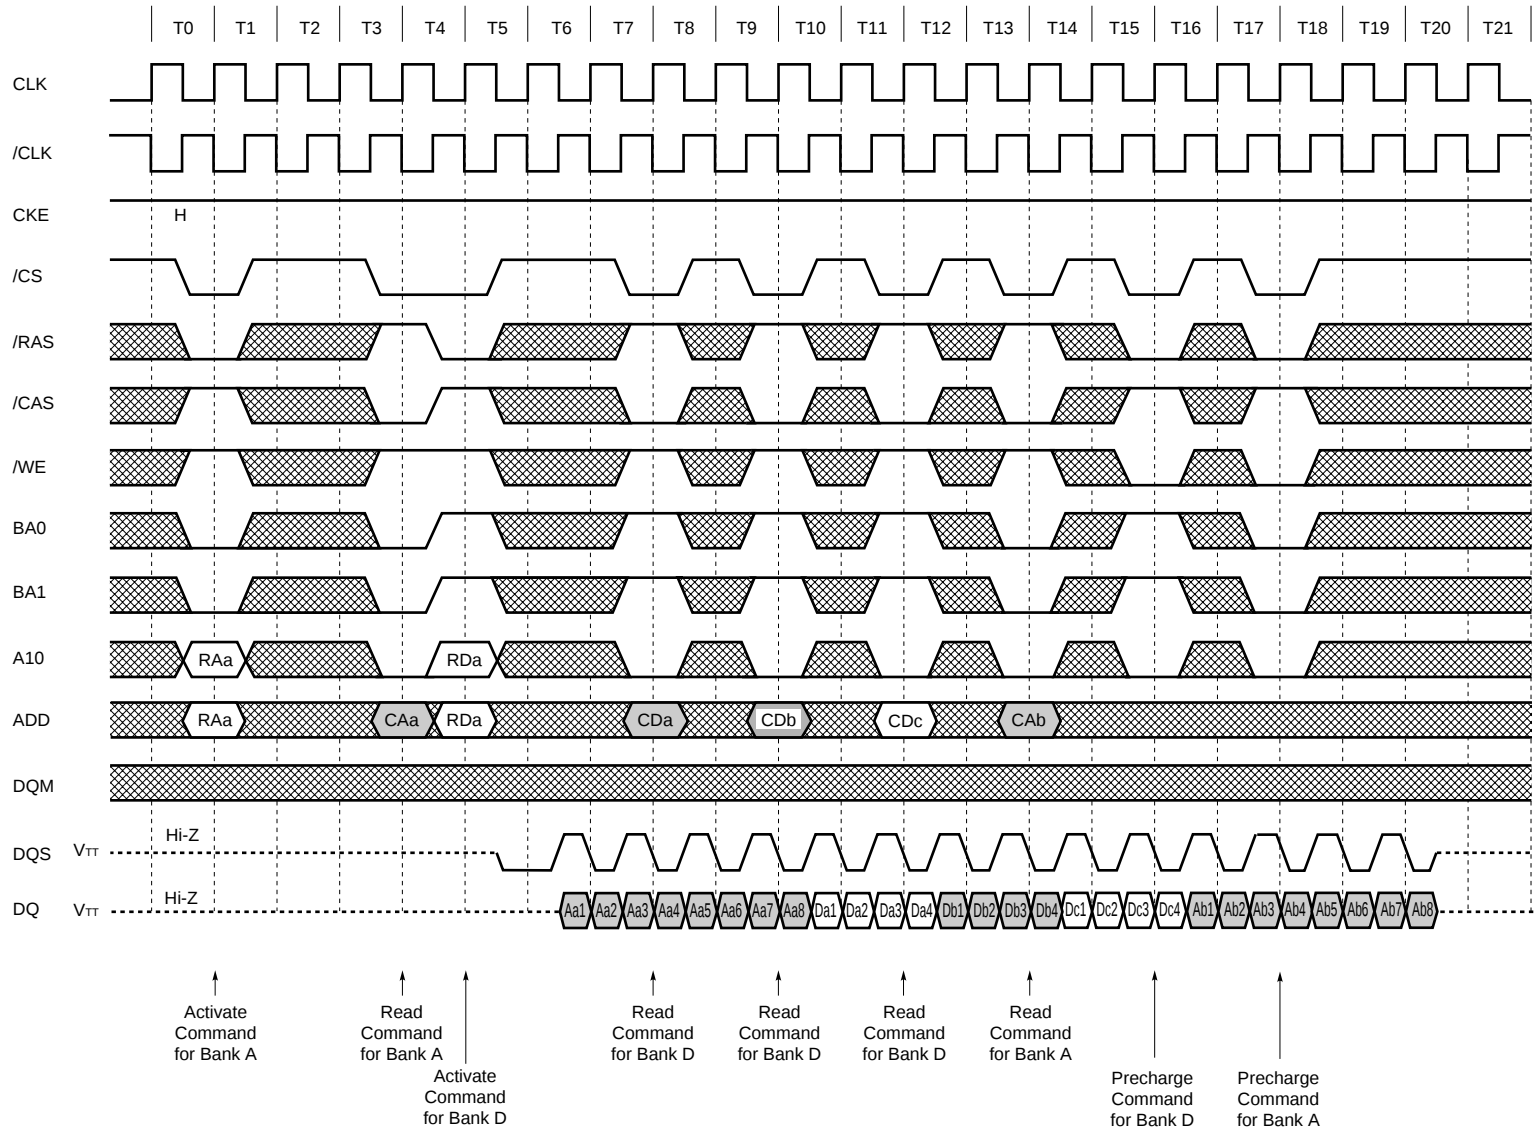


Interleaved Column Write Cycle (1/2) (Burst Length = 8, /CAS Latency = 2)

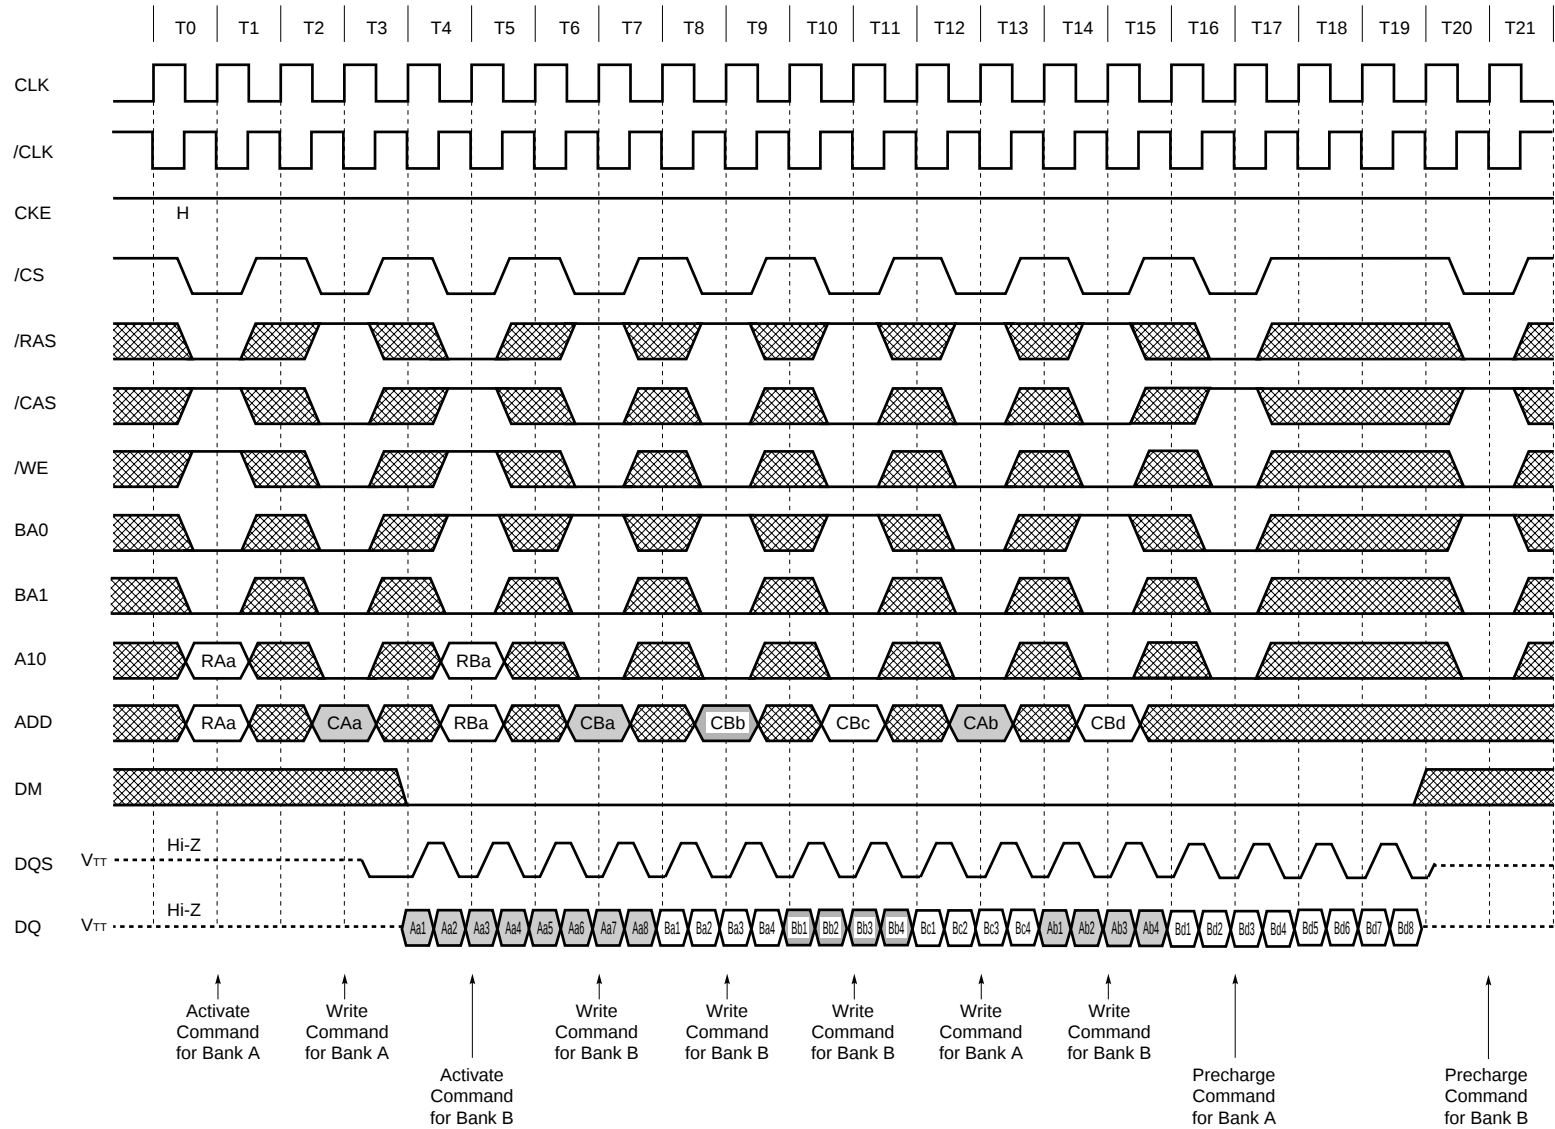


Interleaved Column Write Cycle (2/2) (Burst Length = 8, /CAS Latency = 2.5)

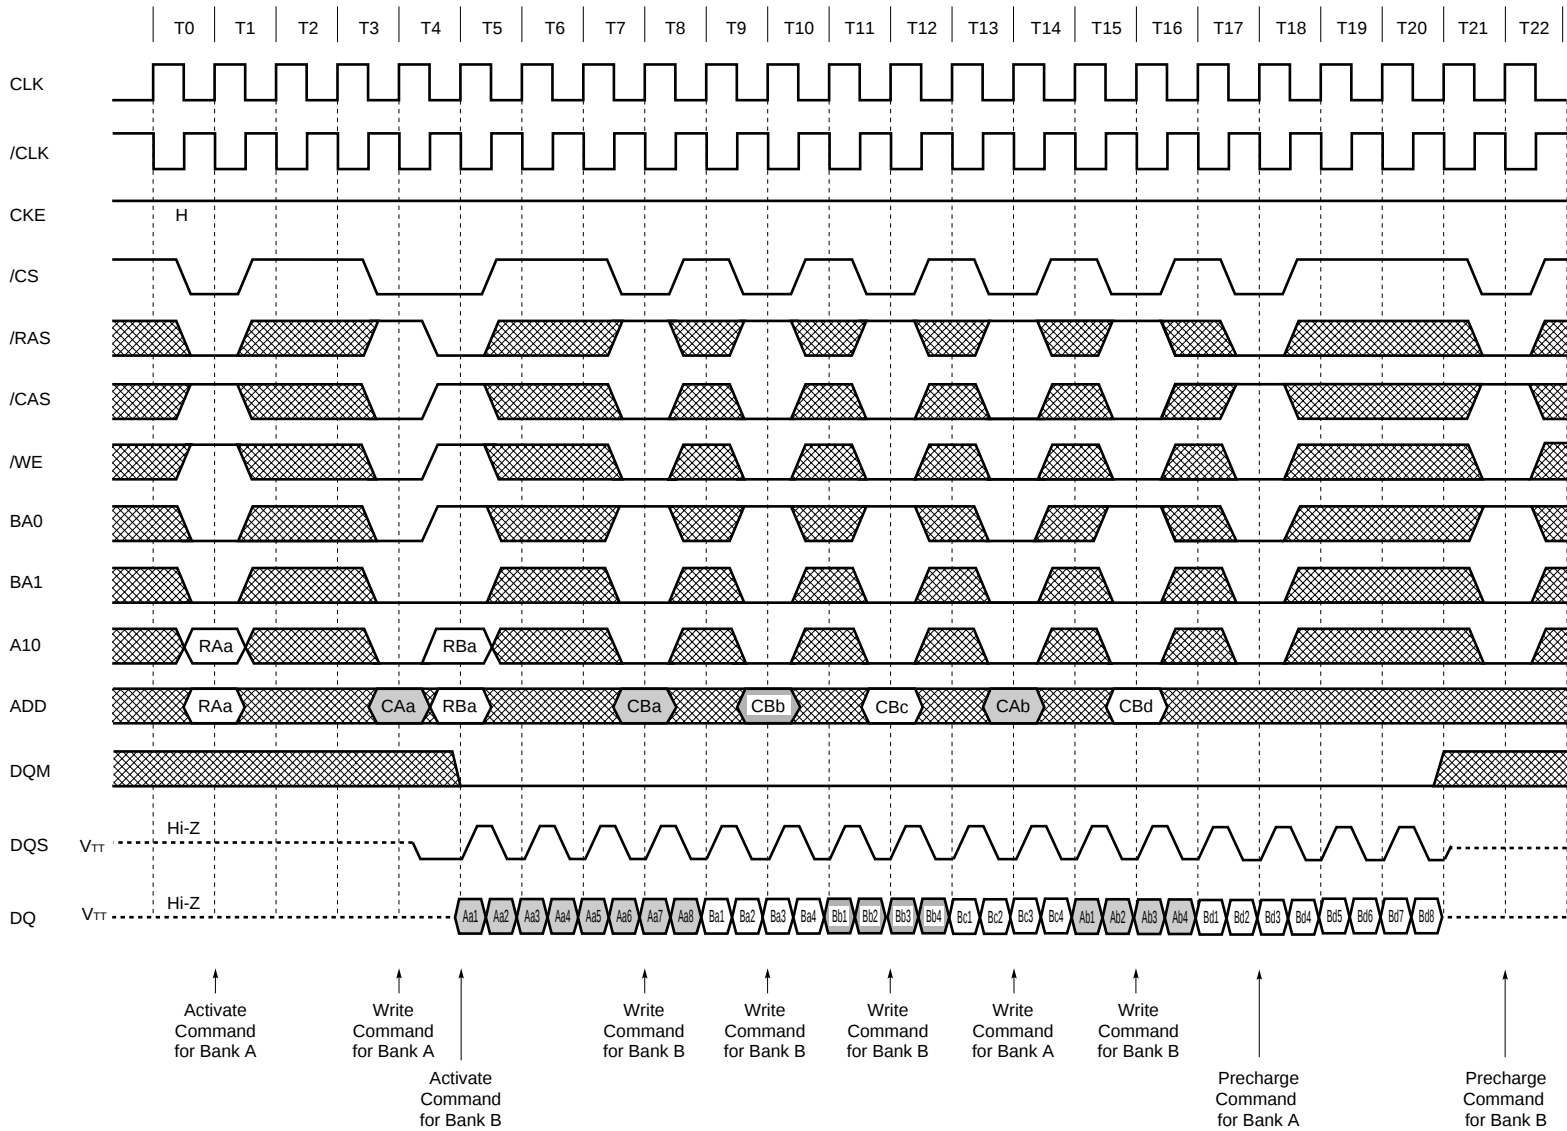


Auto Precharge after Read Burst (1/2) (Burst Length = 8, /CAS Latency = 2)

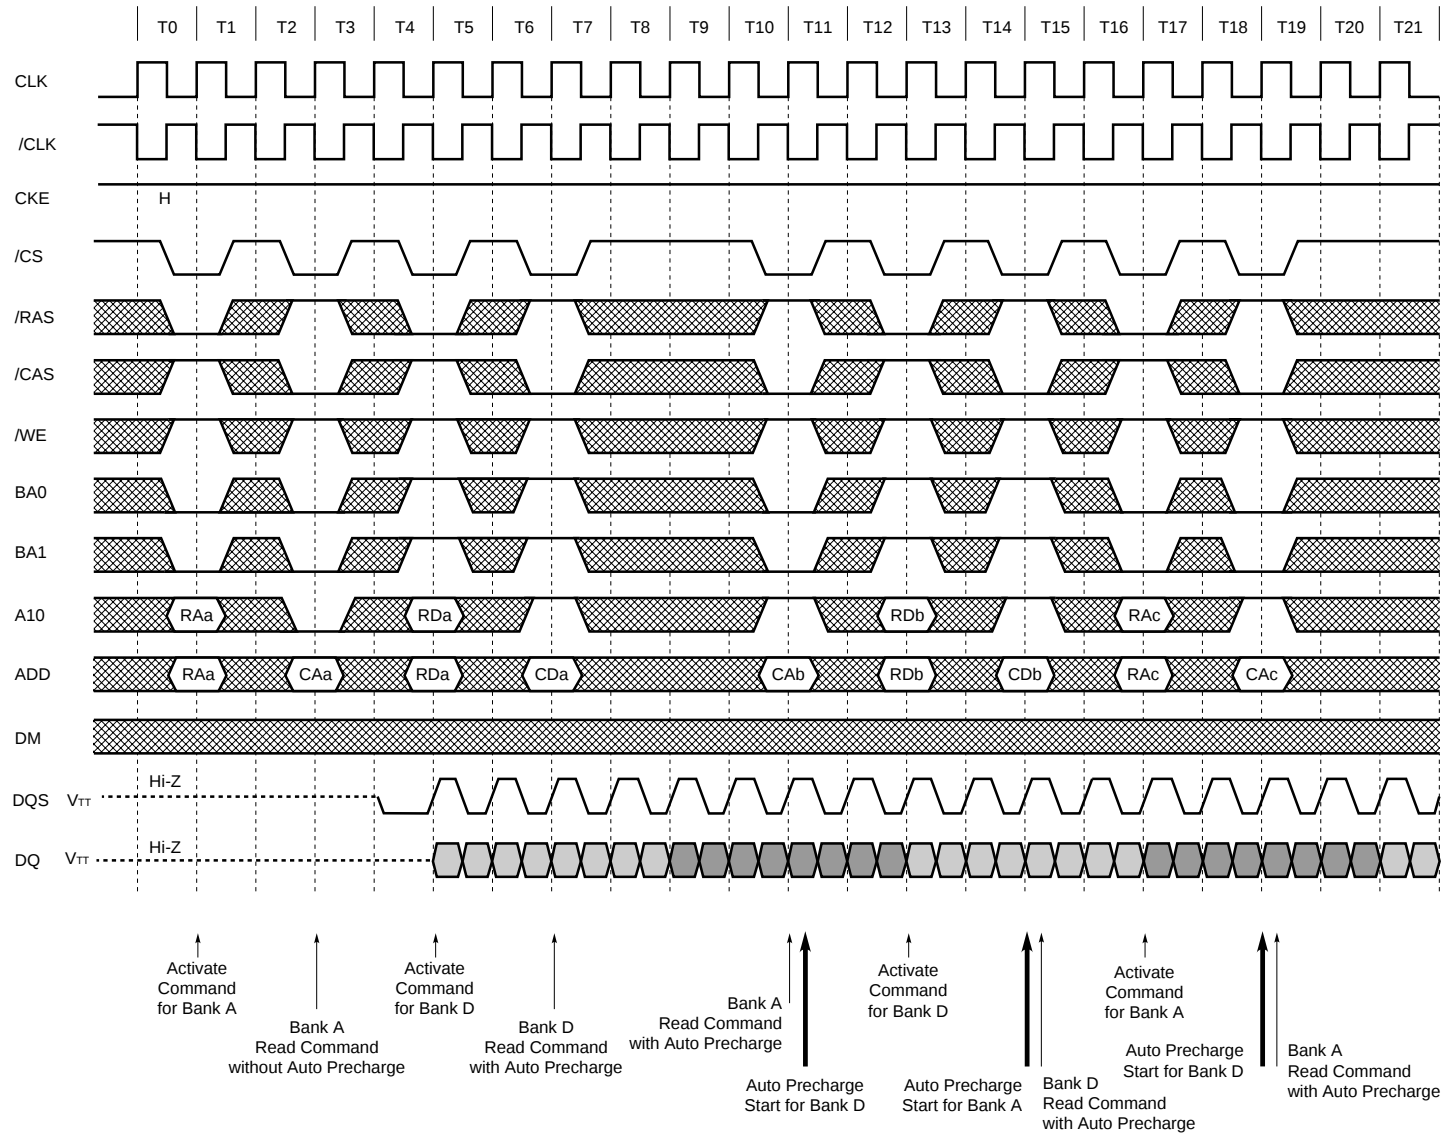


Auto Precharge after Read Burst (2/2) (Burst Length = 8, /CAS Latency = 2.5)

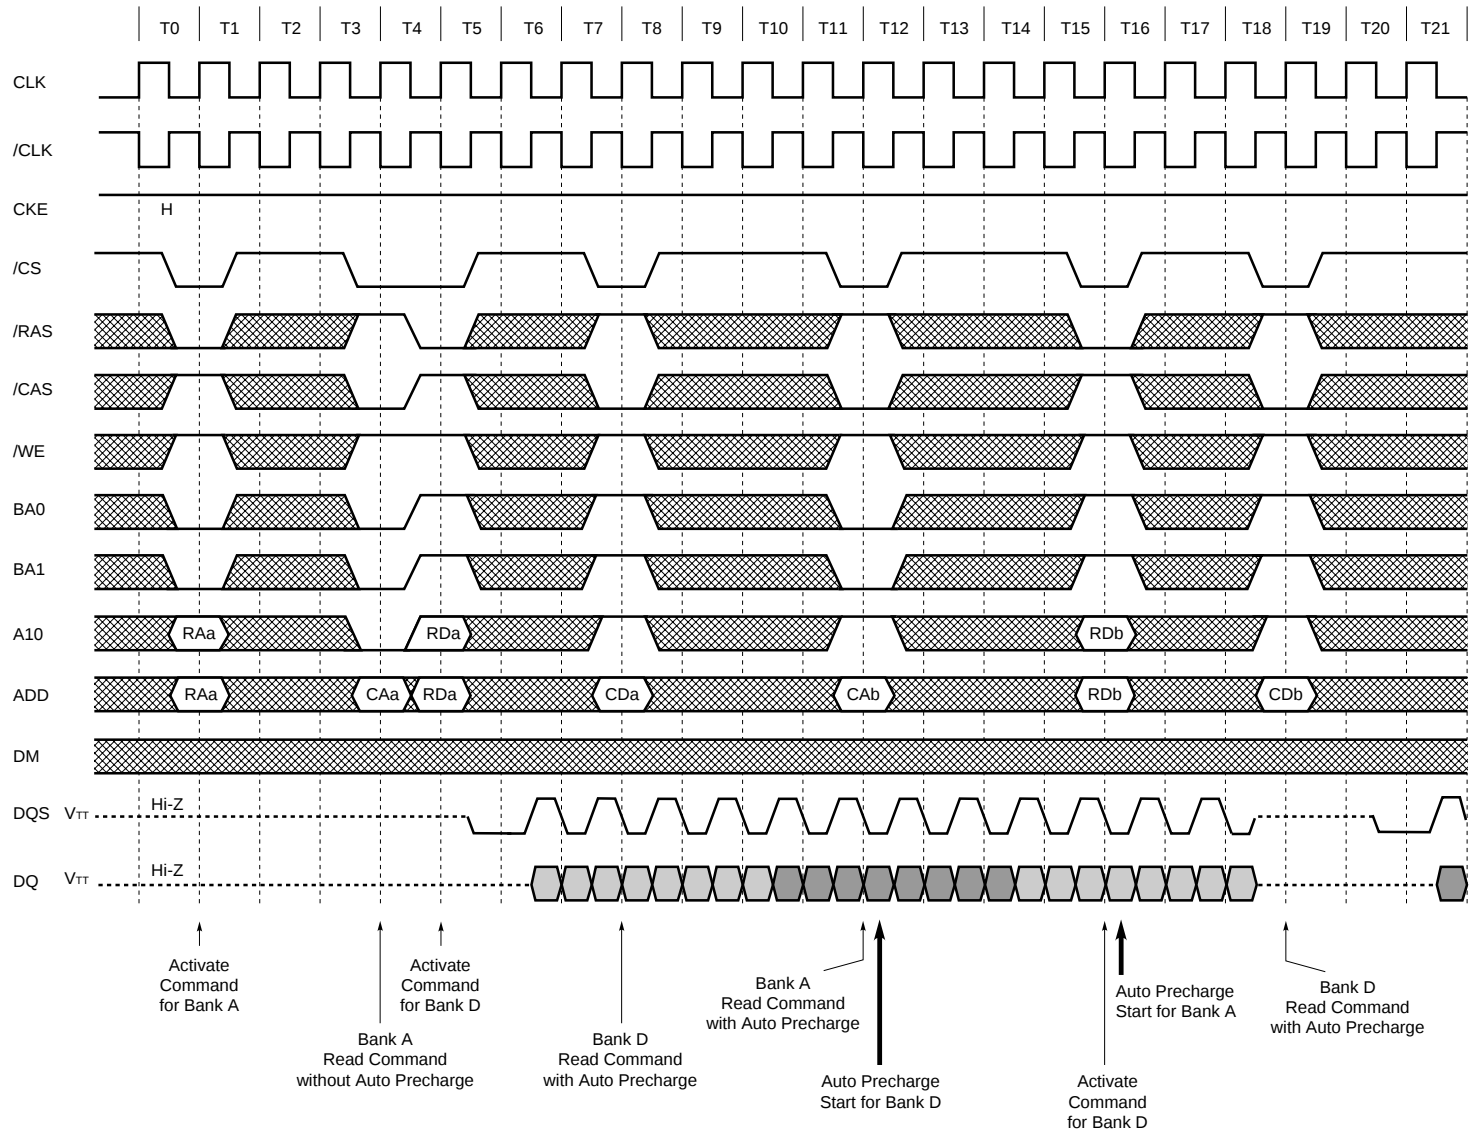


Auto Precharge after Write Burst (1/2) (Burst Length = 8, /CAS Latency = 2)

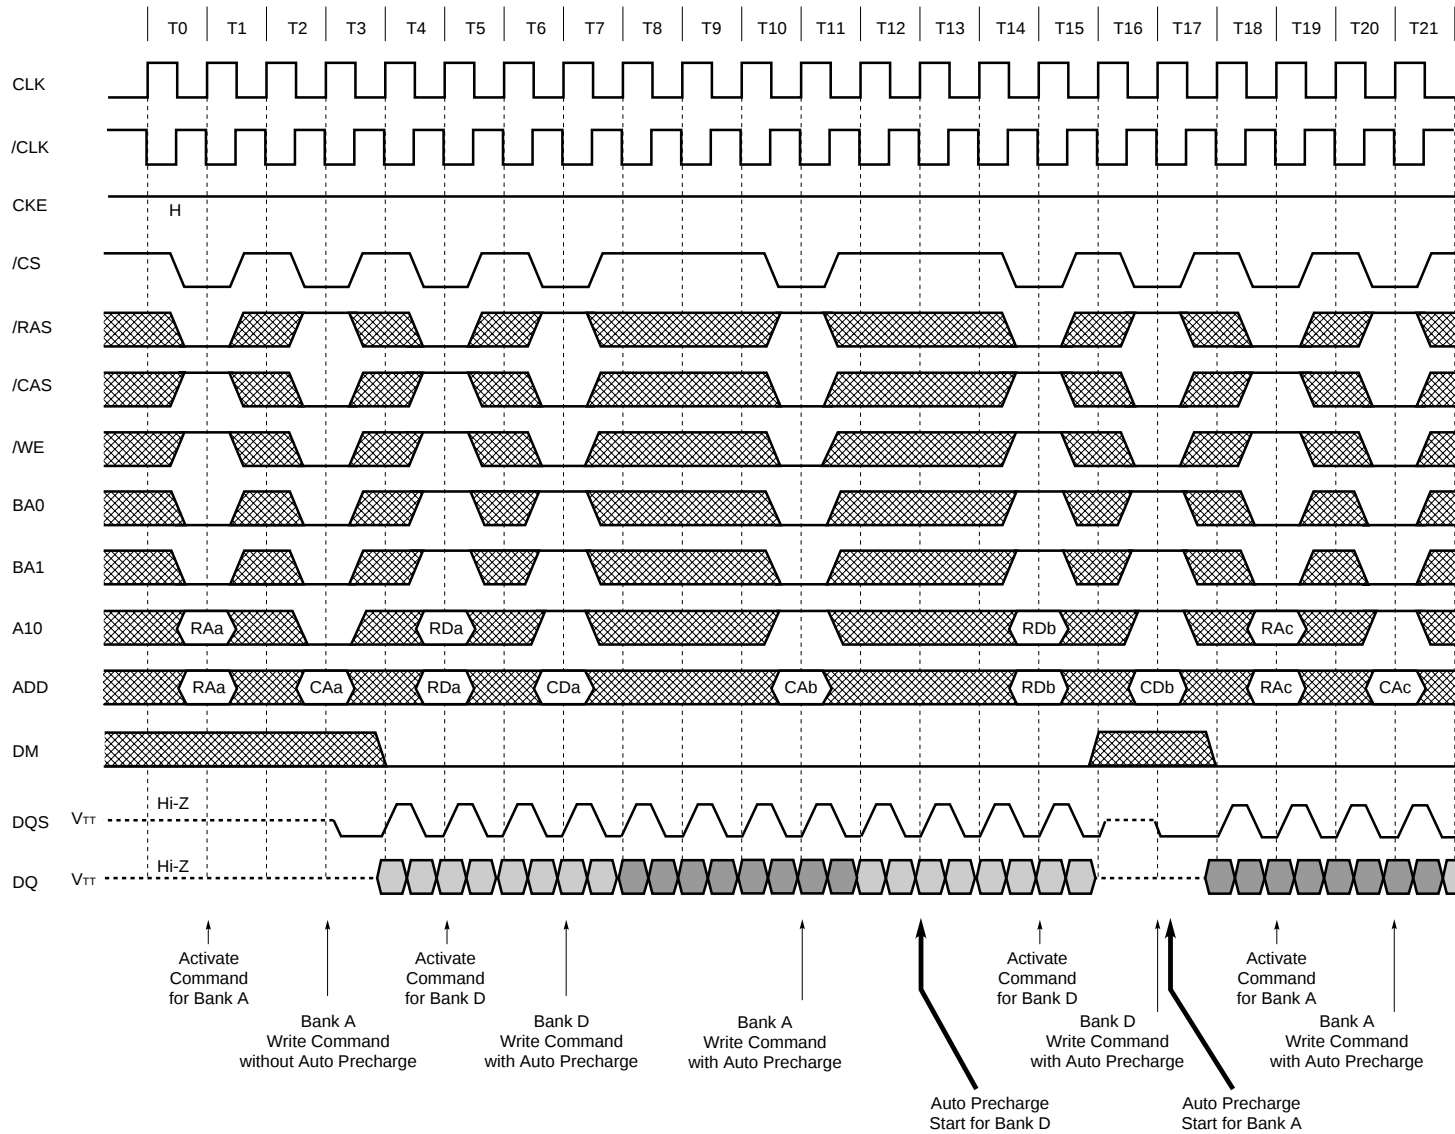


Auto Precharge after Write Burst (2/2) (Burst Length = 8, /CAS Latency = 2.5)

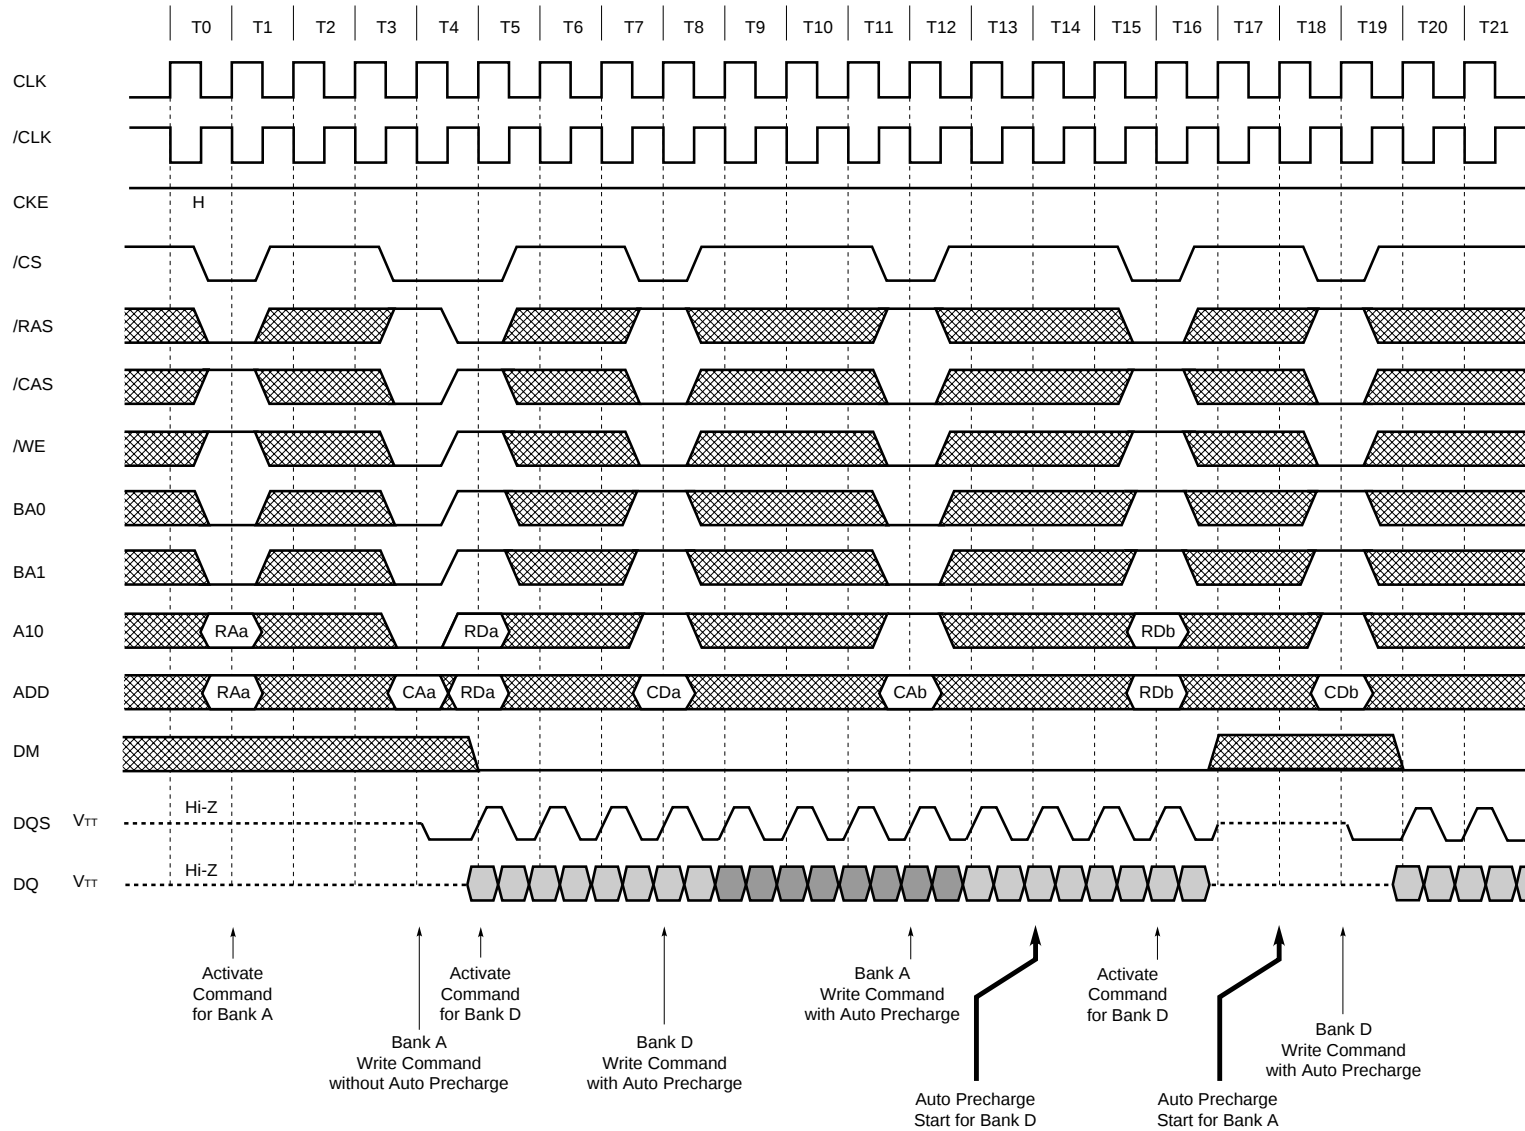


Byte Write Operation (Burst Length = 8, /CAS Latency = 2)

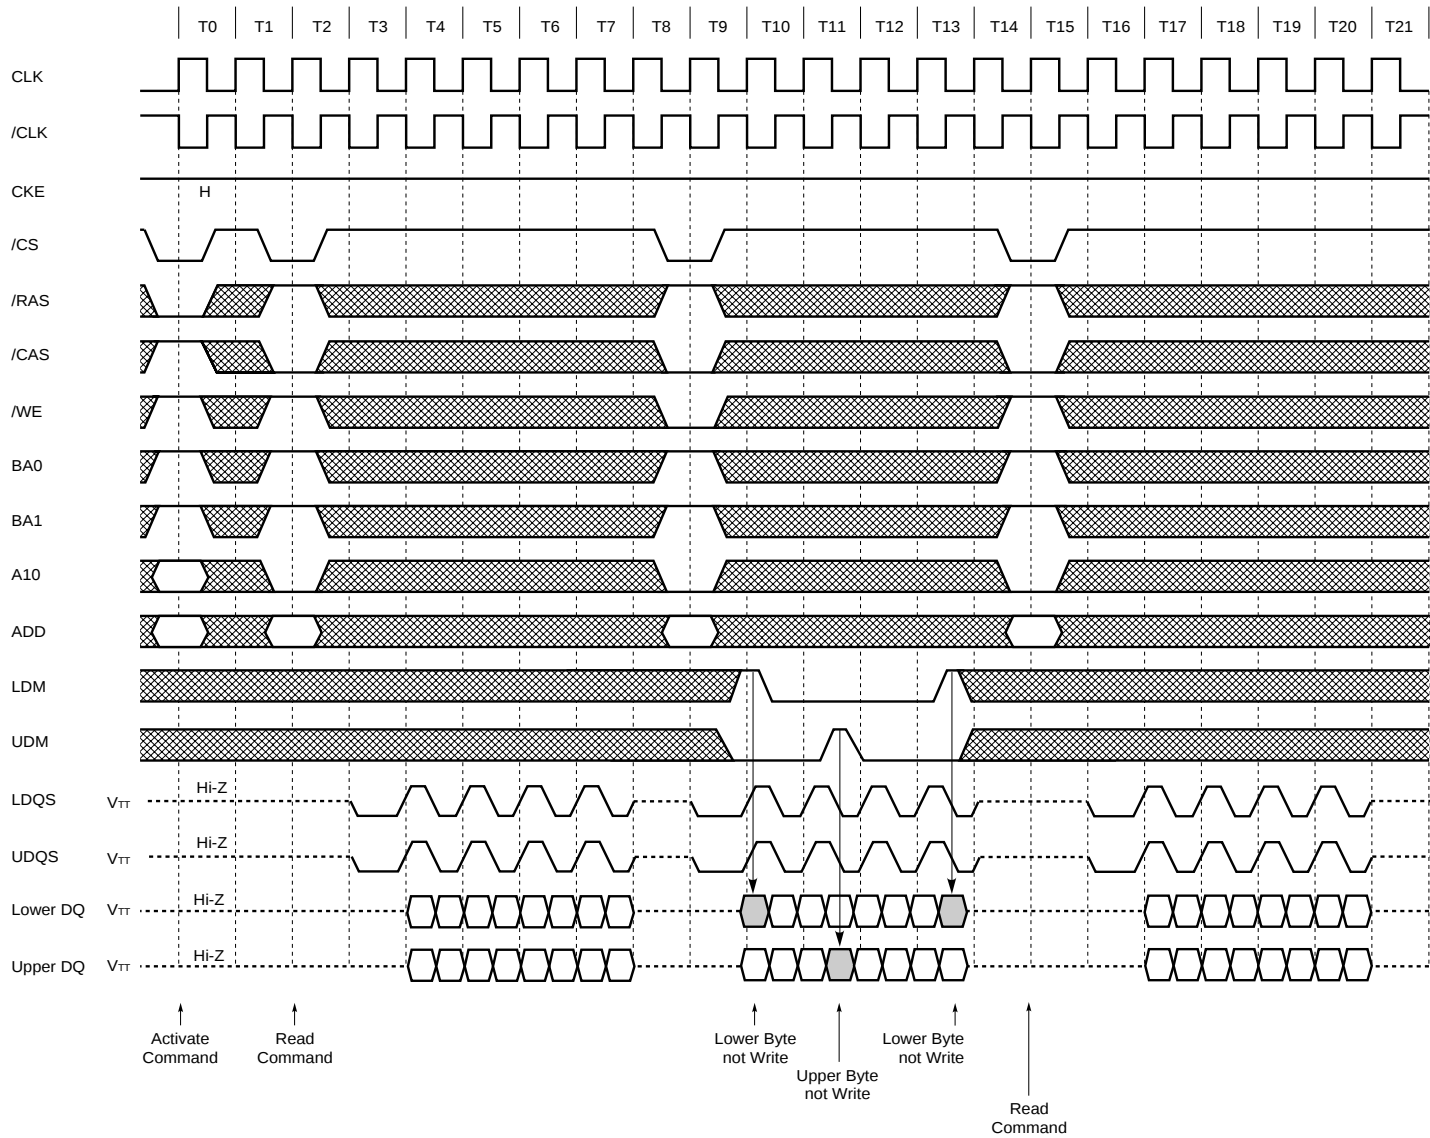


PRE (Precharge) Termination of Burst (1/2) (Burst Length = 8, /CAS Latency = 2)

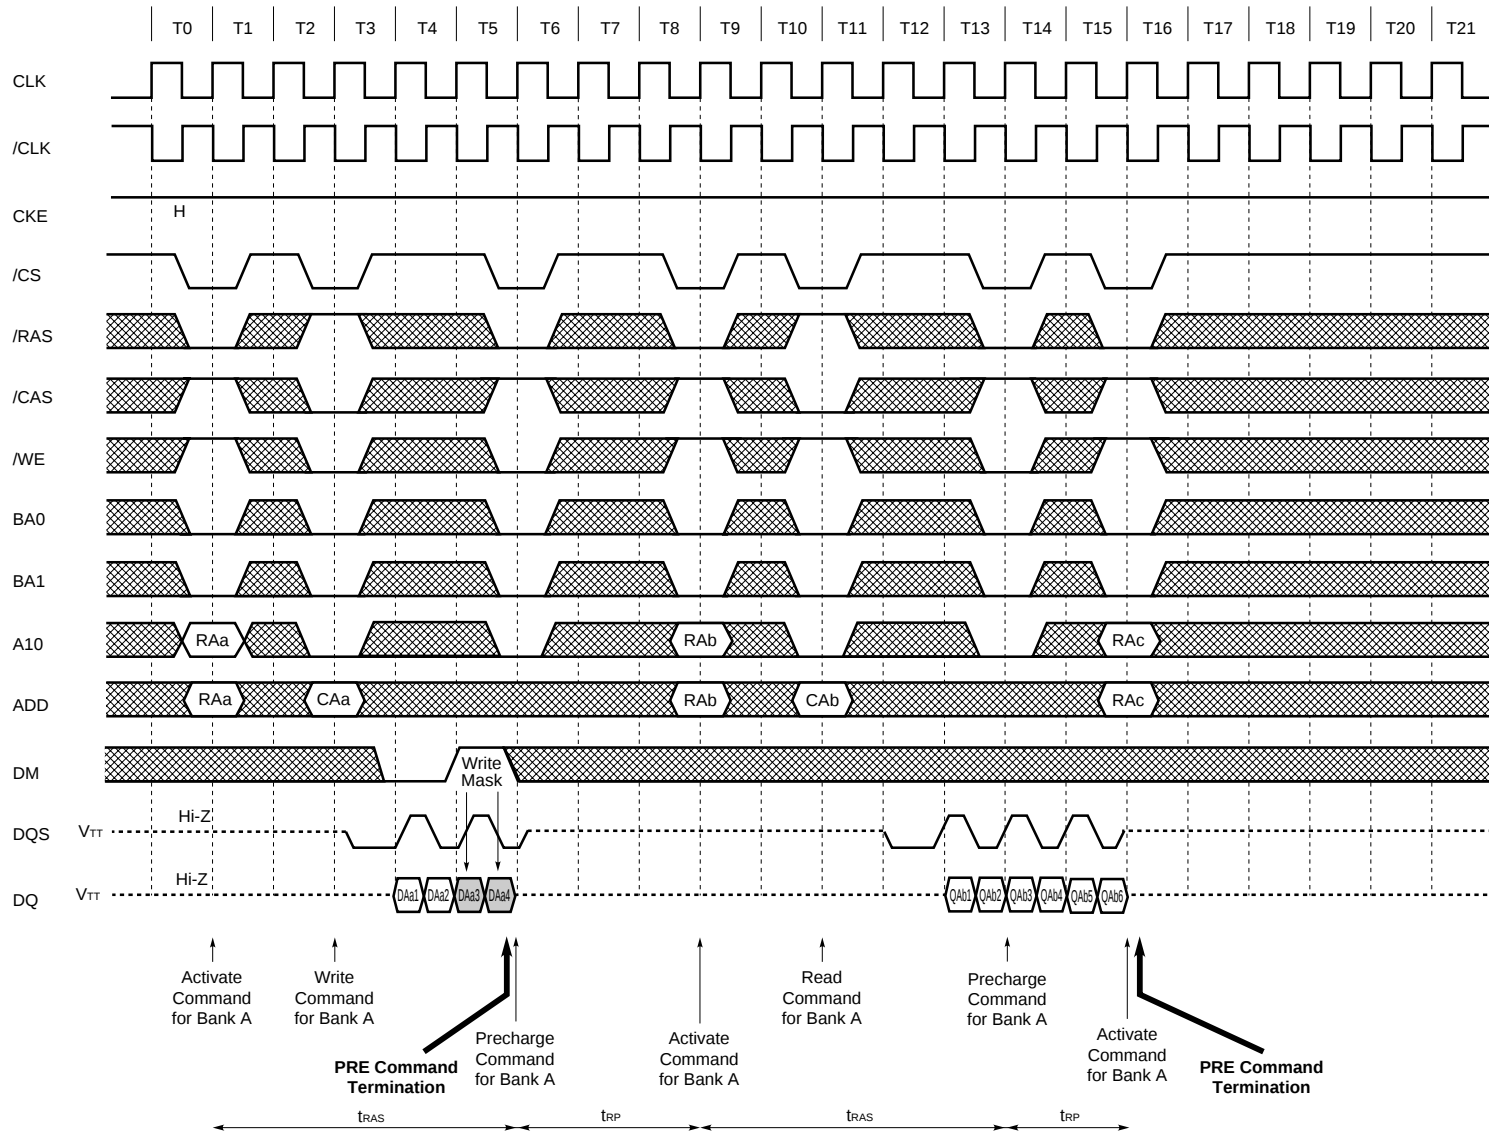

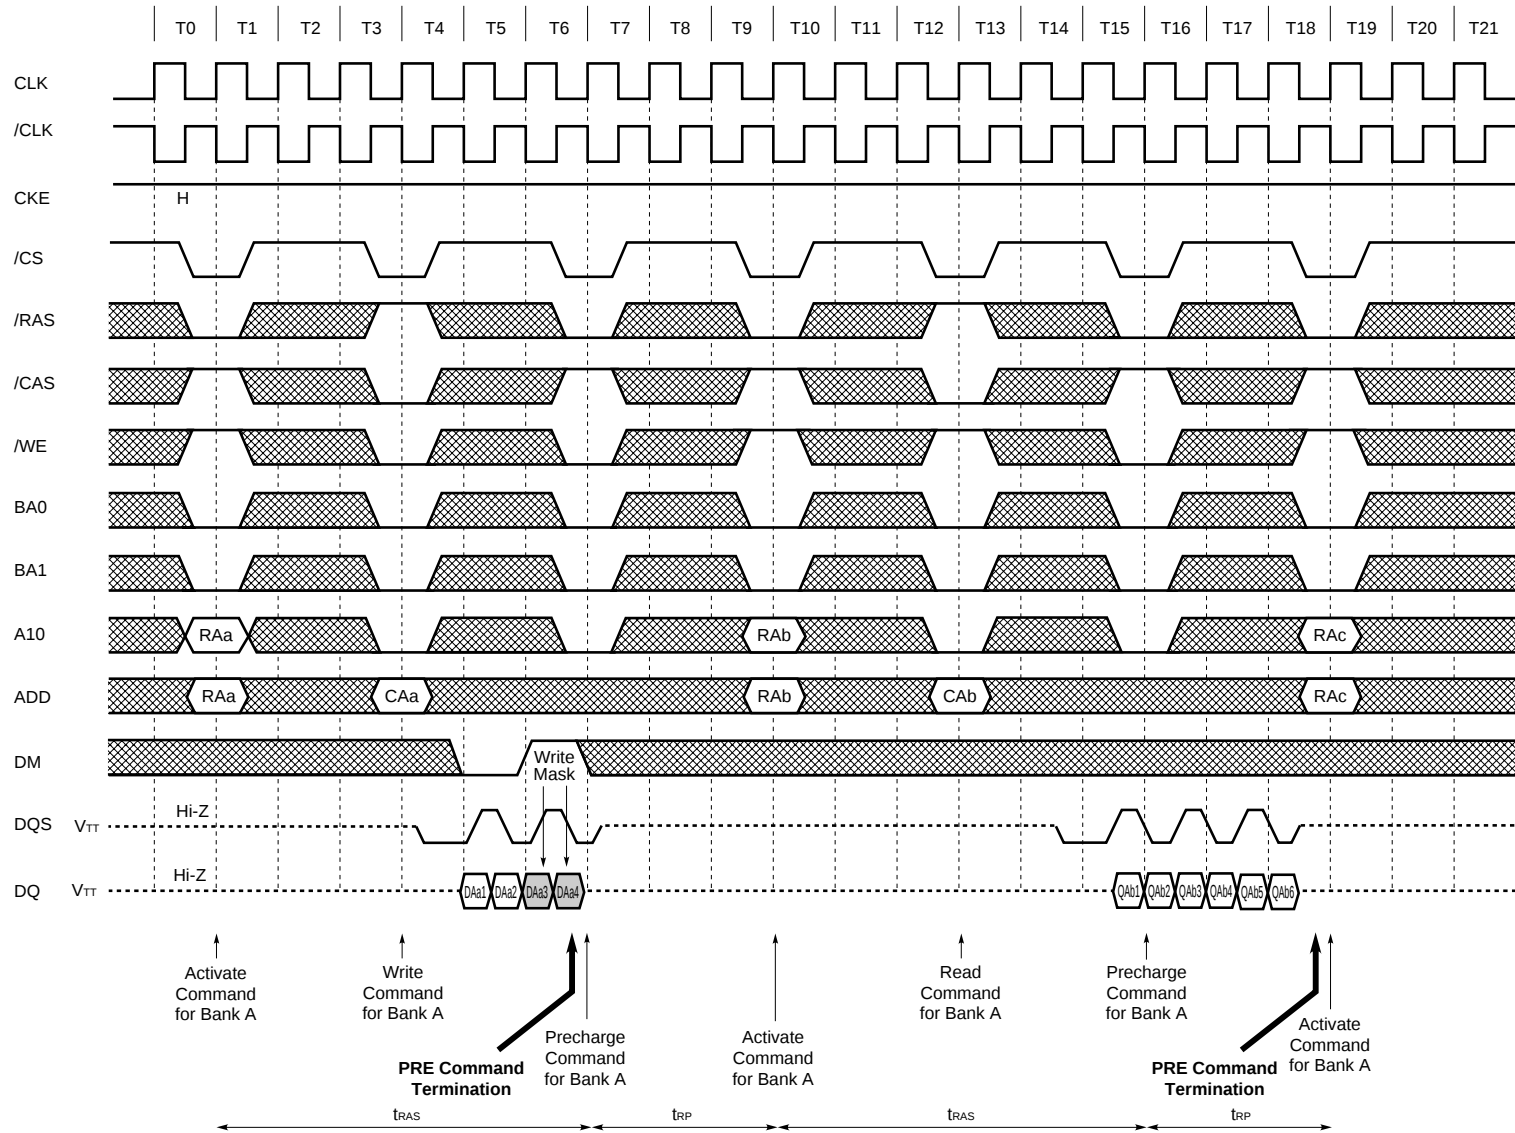PRE (Precharge) Termination of Burst (2/2) (Burst Length = 8, /CAS Latency = 2.5)

14. Package Drawing

66-PIN PLASTIC TSOP (II) (10.16 mm (400))

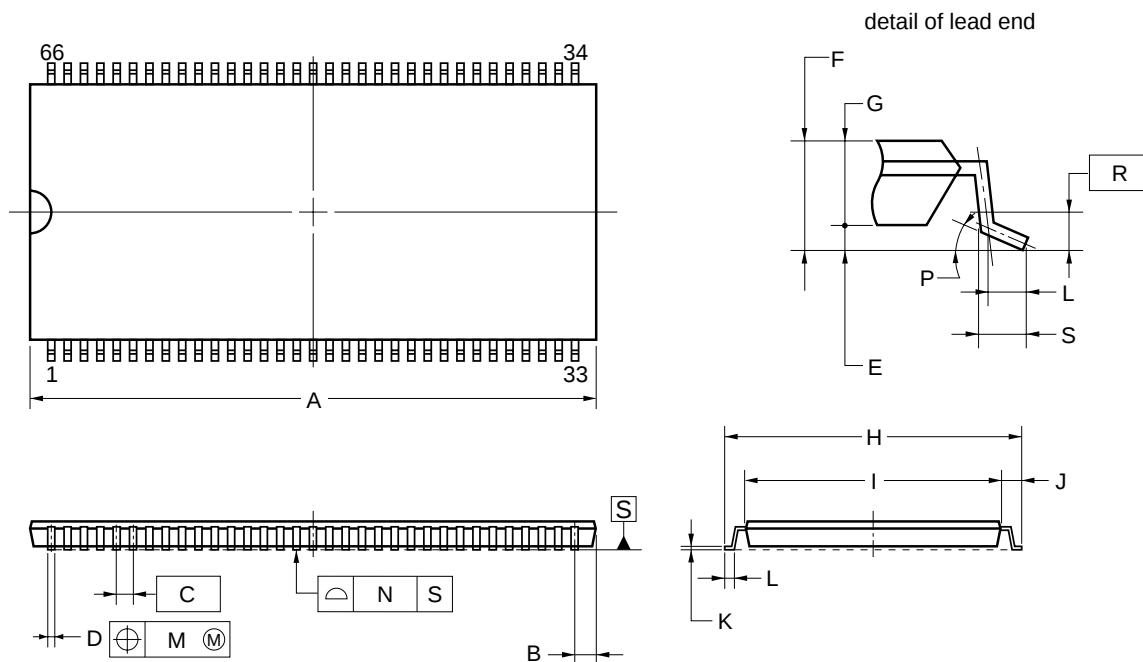

NOTES

- Each lead centerline is located within 0.12 mm of its true position (T.P.) at maximum material condition.
- Dimension "A" does not include mold flash, protrusions or gate burrs. Mold flash, protrusions or gate burrs shall not exceed 0.15mm per side.

ITEM	MILLIMETERS
A	22.22±0.05
B	0.865 MAX.
C	0.65 (T.P.)
D	0.24 ^{+0.08} _{-0.07}
E	0.10±0.05
F	1.1±0.1
G	1.00
H	11.76±0.20
I	10.16±0.10
J	0.80±0.2
K	0.145 ^{+0.025} _{-0.015}
L	0.50
M	0.12
N	0.10
P	3° ^{+5°} _{-3°}
R	0.25
S	0.60±0.15

S66G5-65-9LG-1

15. Recommended Soldering Conditions

Please consult with our sales offices for soldering conditions of the μPD45D128xxx.

Type of Surface Mount Device

μPD45D128xxxG5: 66-pin Plastic TSOP (II) (10.16 mm (400))

16. Revision History

(1/2)

Edition / Date	Page		Description	
	This edition	Previous edition	Type of revision	Location
NEC Corporation (M13852E)				
2nd edition / Jun. 1999	Throughout	Throughout	Modification	$V_{CC} \rightarrow V_{DD}$, $V_{CCQ} \rightarrow V_{DDQ}$, $I_{CC} \rightarrow I_{DD}$
	p.1	p.1	Modification	Power supply for V_{DD} , V_{DDQ}
	p.2	p.2	Modification	Ordering Information (Part Number, Clock frequency)
	p.3	p.3	Modification	Part Number (Minimum Cycle Time)
	p.10	p.10	Modification	Function (CLK, /CLK, CKE, BA0, BA1)
	p.11	p.11	Modification	Extended mode register set command, Mode register set command
	p.13	p.13	Modification	CBR (auto) refresh command
	p.15	p.15	Modification	3. Simplified State Diagram
	p.16	p.16	Modification	4.1 Command Truth Table (A0-7 $\rightarrow$ A0-9) 4.3 CKE Truth Table (SREX, PWDN, PWDN, PDEX)
	p.17	p.17	Modification	Row active(REF/SELF), Write(DES, NOP, REF/SELF)
	p.18	p.18	Deletion	Row activating (SRS)
	p.19	p.19	Modification	Write recovering (DES, NOP, BST), Refresh (DES, NOP, BST), Mode register accessing (DES, NOP)
	p.20	p.20	Modification	Self refresh (SREX), Power down (PDEX), All banks idle (Power down)
	p.21	p.21	Modification	5. Initialization
	p.22	p.22	Modification	Mode register fields
			Addition	Extended mode register fields
	p.23	p.23	Deletion	JEDEC standard test set
			Modification	Vender specific (A8)
	p.27, 29	p.27, 29	Modification	$t_{DPL} \rightarrow t_{WR}$
	p.32	p.32	Modification	1 cycle $\rightarrow t_{WR}$
	p.36	p.36	Modification	$t_{DPL} \rightarrow t_{WR}$
	p.37	p.37	Modification	13.2 Recommended Operating Conditions (V_{DD} , V_{DDQ} , V_{REF})
			Addition	13.2 Recommended Operating Conditions ($V_{ID(OC)}$, V_{IX})
	p.38	p.38	Modification	13.4 DC Characteristics 1
			Deletion	13.5 DC Characteristics 2 (V_{OH} , V_{OL})
			Addition	13.5 DC Characteristics 2 (I_{OH} , I_{OL})
	p.39	p.39	Addition	13.6.1 Test Conditions ($V_{ID(ac)}$)
	p.40	p.40	Modification	13.6.2 Timing Diagram
	p.41	p.41	Modification	13.6.3 Synchronous Characteristics
	p.42	p.42	Modification	13.6.4 Synchronous Characteristics Example 13.6.5 Asynchronous Characteristics
	p.43, 44	p.43, 44	Modification	BA1 $\rightarrow$ BA0, BA0 $\rightarrow$ BA1, $t_{QSV} \rightarrow t_{bv}$
	p.45	p.45	Modification	Relationship between Frequency and Latency
	p.46-73	p.46-73	Modification	BA1 $\rightarrow$ BA0, BA0 $\rightarrow$ BA1
	p.46	p.46	Modification	t_{QSS} , $t_{DPL} \rightarrow t_{WR}$
	p.47	p.47	Modification	$t_{RSC} \rightarrow t_{MRD}$
	p.48	p.48	Modification	Power On Sequence and CBR (auto) Refresh (Timing chart)
	p.51	p.51	Modification	$t_{RC} \rightarrow t_{RFC}$
	p.52	p.52	Addition	t_{XSNR}
			Deletion	200 cycles
	p.54	p.54	Modification	DQS, DQ (T16-T19)
	p.57	p.57	Modification	DQS (T17-T21)
	p.61	p.61	Modification	Read Command for Bank A (T14-T15), DQS, DQ (T16-T21)
	p.62	p.62	Modification	Burst Length = 4 $\rightarrow$ Burst Length = 8
	p.66	p.66	Modification	Precharge Command for Bank B (T19-T22)

(2/2)

Edition / Date	Page		Description	
	This edition	Previous edition	Type of revision	Location
NEC Corporation (M13852E)				
2nd edition / Jun. 1999	p.71	p.71	Modification	Read Command (T13-T14)
3rd edition / April 2000	p.15	p.15	Modification	3. Simplified State Diagram
	p.33	p.33	Modification	11.4 Read to Write Command Interval
	p.37	p.37	Modification	13.2 Recommended Operating Conditions ($V_{REF}(MIN.,MAX.)$, $V_{IH}(DC)(MIN.)$, $V_{IL}(DC)(MAX.)$)
			Modification	13.3 Pin Capacitance
			Modification	13.3 Pin Capacitance (C_{I2} , C_{IO2} (Condition))
	p.38	p.38	Modification	13.4 DC Characteristics 1 ($I_{DD2P}(\text{Maximum})$, I_{DD3P} , I_{DD3N} , I_{DD4R} , I_{DD4W} (Test condition))
			Modification	13.5 DC Characteristics 2 ($I_{IL}(MIN.,MAX.)$, I_{OH} , $I_{OL}(MIN.)$)
	p.39	p.39	Modification	13.6.1 Test Conditions ($V_{IH(ac)}$, $V_{IL(ac)}$ (Value))
			Modification	13.6.1 Test Conditions (Figure)
	p.40	p.40	Modification	13.6.2 Timing Diagram
	p.41	p.41	Addition	13.6.3 Synchronous Characteristics (t_{HP} , t_{QH} , t_{DQSH} , t_{DQSL} , t_{DSS} , t_{DSH} , t_{IPW})
			Deletion	13.6.3 Synchronous Characteristics (t_{DV} , t_{DSLH} , t_{TD} , t_r)
			Modification	13.6.3 Synchronous Characteristics (t_{WPRE})
	p.42	p.42	Addition	13.6.4 Synchronous Characteristics Example (t_{DQSH} , t_{DQSL} , t_{DSS} , t_{DSH})
			Deletion	13.6.4 Synchronous Characteristics Example (t_{DV} , t_{DSLH})
			Modification	13.6.4 Synchronous Characteristics Example (t_{WPRE})
	p.43	p.43	Modification	AC Parameters for Read Timing 1
	p.44	p.44	Modification	AC Parameters for Read Timing 2
	p.46	p.46	Modification	AC Parameters for Write Timing
	p.54	p.54	Modification	Random Column Read (Page with Same Bank) (2/2)
	p.74	p.74	Modification	Package Drawing
Elpida Memory, Inc. (E0030N)				
1st edition / Jan. 2001	—	—	—	Republished by Elpida Memory, Inc.

[MEMO]

NOTES FOR CMOS DEVICES

① PRECAUTION AGAINST ESD FOR SEMICONDUCTORS

Note:

Strong electric field, when exposed to a MOS device, can cause destruction of the gate oxide and ultimately degrade the device operation. Steps must be taken to stop generation of static electricity as much as possible, and quickly dissipate it once, when it has occurred. Environmental control must be adequate. When it is dry, humidifier should be used. It is recommended to avoid using insulators that easily build static electricity. Semiconductor devices must be stored and transported in an anti-static container, static shielding bag or conductive material. All test and measurement tools including work bench and floor should be grounded. The operator should be grounded using wrist strap. Semiconductor devices must not be touched with bare hands. Similar precautions need to be taken for PW boards with semiconductor devices on it.

② HANDLING OF UNUSED INPUT PINS FOR CMOS

Note:

No connection for CMOS device inputs can be cause of malfunction. If no connection is provided to the input pins, it is possible that an internal input level may be generated due to noise, etc., hence causing malfunction. CMOS devices behave differently than Bipolar or NMOS devices. Input levels of CMOS devices must be fixed high or low by using a pull-up or pull-down circuitry. Each unused pin should be connected to V_{DD} or GND with a resistor, if it is considered to have a possibility of being an output pin. All handling related to the unused pins must be judged device by device and related specifications governing the devices.

③ STATUS BEFORE INITIALIZATION OF MOS DEVICES

Note:

Power-on does not necessarily define initial status of MOS device. Production process of MOS does not define the initial operation status of the device. Immediately after the power source is turned ON, the devices with reset function have not yet been initialized. Hence, power-on does not guarantee out-pin levels, I/O settings or contents of registers. Device is not initialized until the reset signal is received. Reset operation must be executed immediately after power-on for devices having reset function.

- **The information in this document is current as of April, 2000. The information is subject to change without notice. For actual design-in, refer to the latest publications of Elpida's data sheets or data books, etc., for the most up-to-date specifications of Elpida semiconductor products. Not all products and/or types are available in every country. Please check with an Elpida Memory, Inc. for availability and additional information.**
 - No part of this document may be copied or reproduced in any form or by any means without prior written consent of Elpida. Elpida assumes no responsibility for any errors that may appear in this document.
 - Elpida does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of Elpida semiconductor products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of Elpida or others.
 - Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of customer's equipment shall be done under the full responsibility of customer. Elpida assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
 - While Elpida endeavours to enhance the quality, reliability and safety of Elpida semiconductor products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in Elpida semiconductor products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment, and anti-failure features.
 - Elpida semiconductor products are classified into the following three quality grades:
"Standard", "Special" and "Specific". The "Specific" quality grade applies only to semiconductor products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of a semiconductor product depend on its quality grade, as indicated below. Customers must check the quality grade of each semiconductor product before using it in a particular application.
 - "Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots
 - "Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)
 - "Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.
- The quality grade of Elpida semiconductor products is "Standard" unless otherwise expressly specified in Elpida's data sheets or data books, etc. If customers wish to use Elpida semiconductor products in applications not intended by Elpida, they must contact an Elpida Memory, Inc. in advance to determine Elpida's willingness to support a given application.
- (Note)
- (1) "Elpida" as used in this statement means Elpida Memory, Inc. and also includes its majority-owned subsidiaries.
- (2) "Elpida semiconductor products" means any semiconductor product developed or manufactured by or for Elpida (as defined above).