



SAW Components

SAW RF filter

Automotive telematics

Series/type:	B4235
Ordering code:	B39182B4235H910
Date:	February 10, 2009
Version:	2.1



SAW Components

B4235

SAW RF filter

942.5/1842.5 MHz

Data sheet




Application

- Low-loss RF filter for automotive telematics GSM 900/1800 system, receive path
- Usable passband:
Filter 1 (GSM900): 30MHz
Filter 2 (GSM1800): 75MHz
- Unbalanced and balanced operation of both filters possible
- Impedance transformation from 50 Ω to 150 Ω for both filters
- Suitable for GPRS class 1 to 12




Features

- Package size 3.0 x 2.5 x 0.98 mm³
- Package code QCC10G
- RoHS compatible
- Approximate weight 0.027 g
- Package for **Surface Mount Technology (SMT)**
- Ni, gold-plated terminals
- Lead free soldering compatible with J - STD20C
- AEC-Q200 qualified component family
- **Electrostatic Sensitive Device (ESD)**

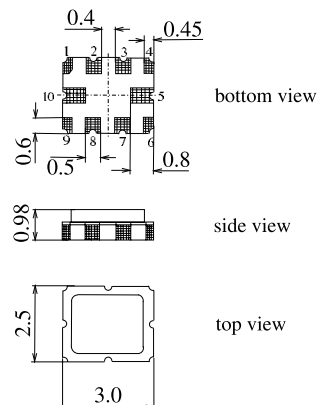

Pin configuration

- 1, 2 Output balanced [Filter 1]
- 3, 4 Output balanced [Filter 2]
- 6 Input [Filter 2]
- 9 Input [Filter 1]
- 5, 7, 8, 10 Ground (case)

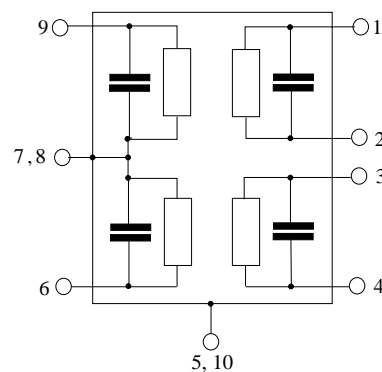



SAW Components	B4235
SAW RF filter	942.5/1842.5 MHz

Data sheet



Characteristics Filter 1 (GSM900)

Operating temperature range:	$T = +25\text{ °C} \pm 2\text{ °C}$
Terminating source impedance:	$Z_S = 50\ \Omega$ (unbalanced)
Terminating load impedance:	$Z_L = 150\ \Omega$ (balanced) 68 nH

		min.	typ. @ 25 °C	max.	
Center frequency	f_C	—	942.50	—	MHz
Maximum insertion attenuation	α_{\max}	—	1.8	2.2	dB
925.00 ... 960.00 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	0.6	1.2	dB
925.00 ... 960.00 MHz					
Input VSWR		—	1.9	2.1	
925.00 ... 960.00 MHz					
Output VSWR		—	1.9	2.1	
925.00 ... 960.00 MHz					
Output amplitude balance ($ S_{31} / S_{21} $)		-2.0		2.0	dB
925.00 ... 960.00 MHz					
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^\circ$)		-10.0		10.0	degree
925.00 ... 960.00 MHz					
Attenuation	α				
10.00 ... 480.00 MHz		45	53	—	dB
480.00 ... 880.00 MHz		30	38	—	dB
880.00 ... 905.00 MHz		24	27	—	dB
905.00 ... 915.00 MHz		20	25	—	dB
980.00 ... 1050.00 MHz		23	30	—	dB
1050.00 ... 3500.00 MHz		30	34	—	dB
3500.00 ... 4500.00 MHz		22	26	—	dB
4500.00 ... 6000.00 MHz		15	17	—	dB



SAW Components

B4235

SAW RF filter

942.5/1842.5 MHz

Data sheet



Characteristics Filter 1 (GSM900)

Temperature range for specification:

$T = -20\text{ °C to }+75\text{ °C}$

Terminating source impedance:

$Z_S = 50\ \Omega$ (unbalanced)

Terminating load impedance:

$Z_L = 150\ \Omega$ (balanced) || 68 nH

		min.	typ. @ 25 °C	max.	
Center frequency	f_C	—	942.50	—	MHz
Maximum insertion attenuation	α_{\max}	—	1.8	2.5	dB
925.00 ... 960.00 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	0.9	1.5	dB
925.00 ... 960.00 MHz					
Input VSWR		—	1.9	2.1	
925.00 ... 960.00 MHz					
Output VSWR		—	1.9	2.1	
925.00 ... 960.00 MHz					
Output amplitude balance ($ S_{31} / S_{21} $)		-2.5		2.5	dB
925.00 ... 960.00 MHz					
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^\circ$)		-12.0		12.0	degree
925.00 ... 960.00 MHz					
Attenuation	α				
10.00 ... 480.00 MHz		45	50	—	dB
480.00 ... 880.00 MHz		30	38	—	dB
880.00 ... 905.00 MHz		24	27	—	dB
905.00 ... 915.00 MHz		11	18	—	dB
980.00 ... 1050.00 MHz		23	30	—	dB
1050.00 ... 3500.00 MHz		30	34	—	dB
3500.00 ... 4500.00 MHz		22	26	—	dB
4500.00 ... 6000.00 MHz		15	17	—	dB



SAW Components

B4235


SAW RF filter

942.5/1842.5 MHz


Data sheet



Transfer function of filter 1(narrow band)

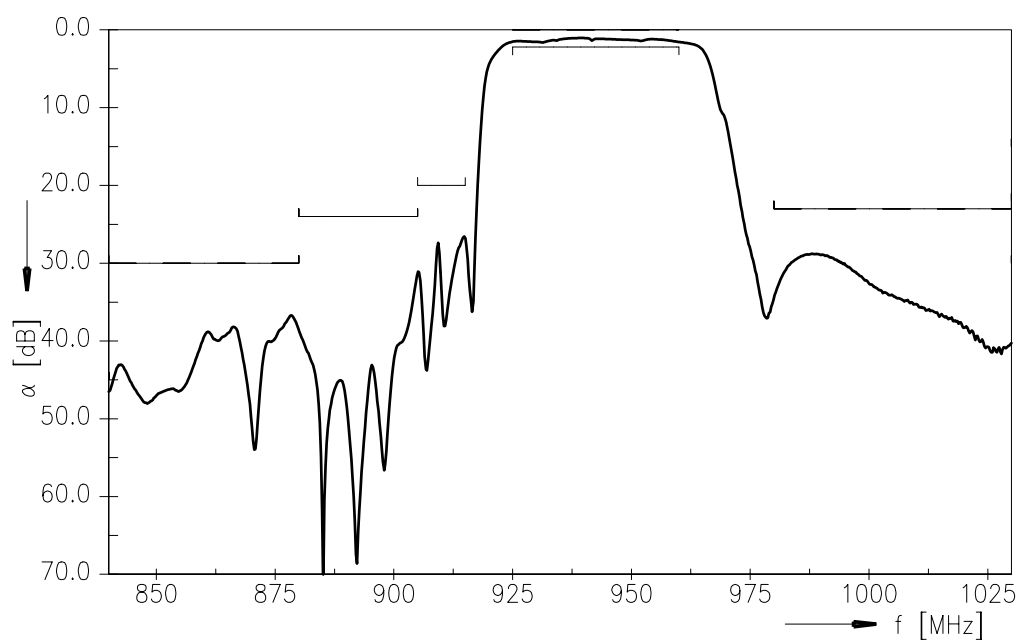

Transfer function of filter 1 (wide band)

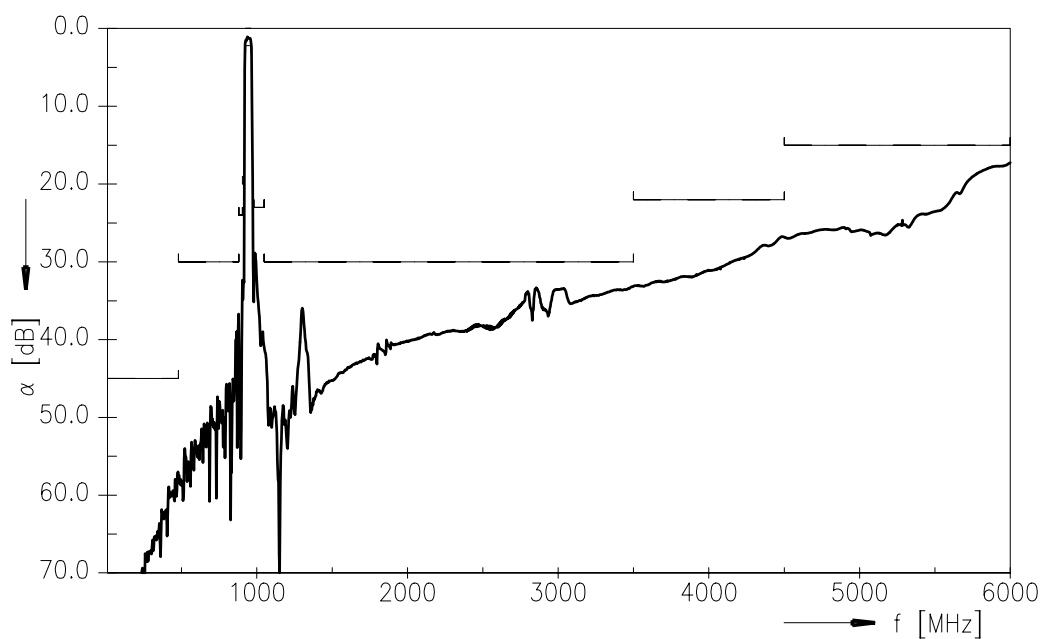

Please read *cautions and warnings* and *important notes* at the end of this document.



SAW Components

B4235

SAW RF filter

942.5/1842.5 MHz

Data sheet



Characteristics Filter 2 (GSM1800)

Operating temperature range:

$T = +25\text{ °C} \pm 2\text{ °C}$

Terminating source impedance:

$Z_S = 50\ \Omega$ (unbalanced)

Terminating load impedance:

$Z_L = 150\ \Omega$ (balanced) $\parallel 12\text{ nH}$

		min.	typ. @ 25 °C	max.	
Center frequency	f_C	—	1842.50	—	MHz
Maximum insertion attenuation	α_{\max}	—	2.4	2.7	dB
1805.00 ... 1880.00 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	1.2	1.5	dB
1805.00 ... 1880.00 MHz					
Input VSWR		—	2.4	2.6	
1805.00 ... 1880.00 MHz					
Output VSWR		—	2.2	2.4	
1805.00 ... 1880.00 MHz					
Output amplitude balance ($ S_{31} / S_{21} $)		-1.5		1.5	dB
1805.00 ... 1880.00 MHz					
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^\circ$)		-10.0		10.0	degree
1805.00 ... 1880.00 MHz					
Attenuation	α				
10.00 ... 1000.00 MHz		40	50	—	dB
1000.00 ... 1705.00 MHz		26	28	—	dB
1705.00 ... 1785.00 MHz		13	17	—	dB
1920.00 ... 1980.00 MHz		15	24	—	dB
1980.00 ... 2030.00 MHz		24	28	—	dB
2030.00 ... 5000.00 MHz		30	34	—	dB
5000.00 ... 6000.00 MHz		25	34	—	dB



SAW Components	B4235
SAW RF filter	942.5/1842.5 MHz

Data sheet



Characteristics Filter 2 (GSM1800)

Temperature range for specification:

$T = -20\text{ °C to }+75\text{ °C}$

Terminating source impedance:

$Z_S = 50\ \Omega$ (unbalanced)

Terminating load impedance:

$Z_L = 150\ \Omega$ (balanced) $\parallel 12\text{ nH}$

		min.	typ. @ 25 °C	max.	
Center frequency	f_C	—	1842.50	—	MHz
Maximum insertion attenuation	α_{\max}	—	2.4	2.7	dB
1805.00 ... 1880.00 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	1.5	1.8	dB
1805.00 ... 1880.00 MHz					
Input VSWR		—	2.4	2.6	
1805.00 ... 1880.00 MHz					
Output VSWR		—	2.2	2.4	
1805.00 ... 1880.00 MHz					
Output amplitude balance (S_{31} / S_{21})		—1.5		1.5	dB
1805.00 ... 1880.00 MHz					
Output phase balance ($\phi(S_{31})-\phi(S_{21})+180^\circ$)		—10.0		10.0	degree
1805.00 ... 1880.00 MHz					
Attenuation	α				
10.00 ... 1000.00 MHz		40	50	—	dB
1000.00 ... 1705.00 MHz		26	28	—	dB
1705.00 ... 1785.00 MHz		10	17	—	dB
1920.00 ... 1980.00 MHz		15	24	—	dB
1980.00 ... 2030.00 MHz		24	28	—	dB
2030.00 ... 5000.00 MHz		30	34	—	dB
5000.00 ... 6000.00 MHz		25	34	—	dB

**SAW Components****B4235****SAW RF filter****942.5/1842.5 MHz**

Data sheet

**Maximum ratings**

Operable temperature range	T	-45/+125	°C	Machine Model, 10 pulses
Storage temperature range	T _{stg}	-45/+125	°C	
DC voltage	V _{DC}	5	V	
ESD voltage	V _{ESD} ¹⁾	50	V	
Input power at Tx band:				peak power of GSM signal duty cycle 4:8
GSM850, GSM900				
GSM1800, GSM1900	P _{IN}	15	dBm	

¹⁾ -acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses



SAW Components

B4235


SAW RF filter

942.5/1842.5 MHz


Data sheet



Transfer function of filter 1(narrow band)

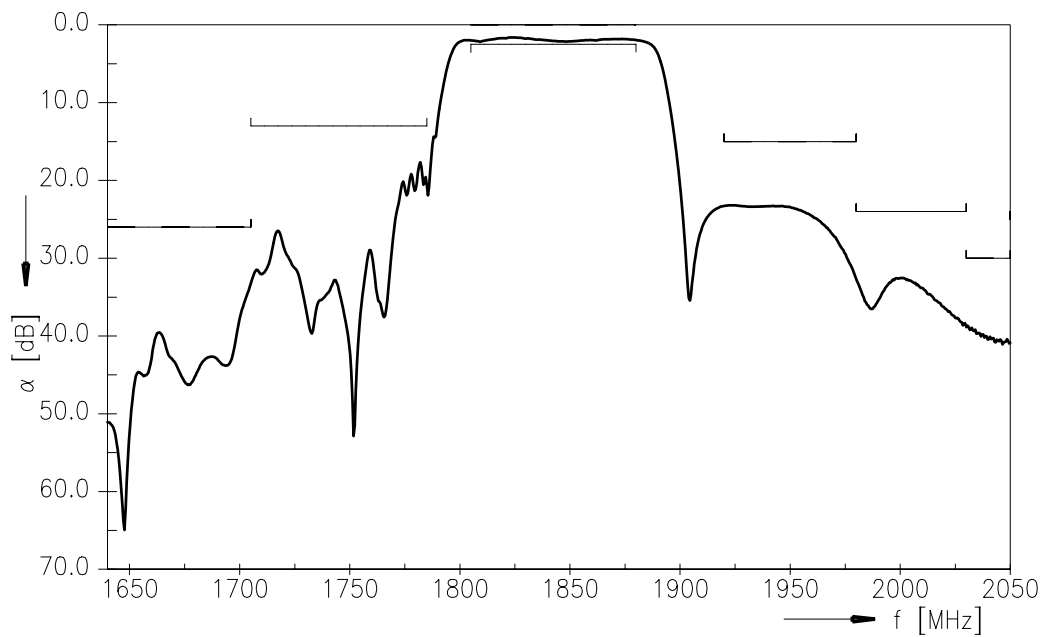

Transfer function of filter 1 (wide band)

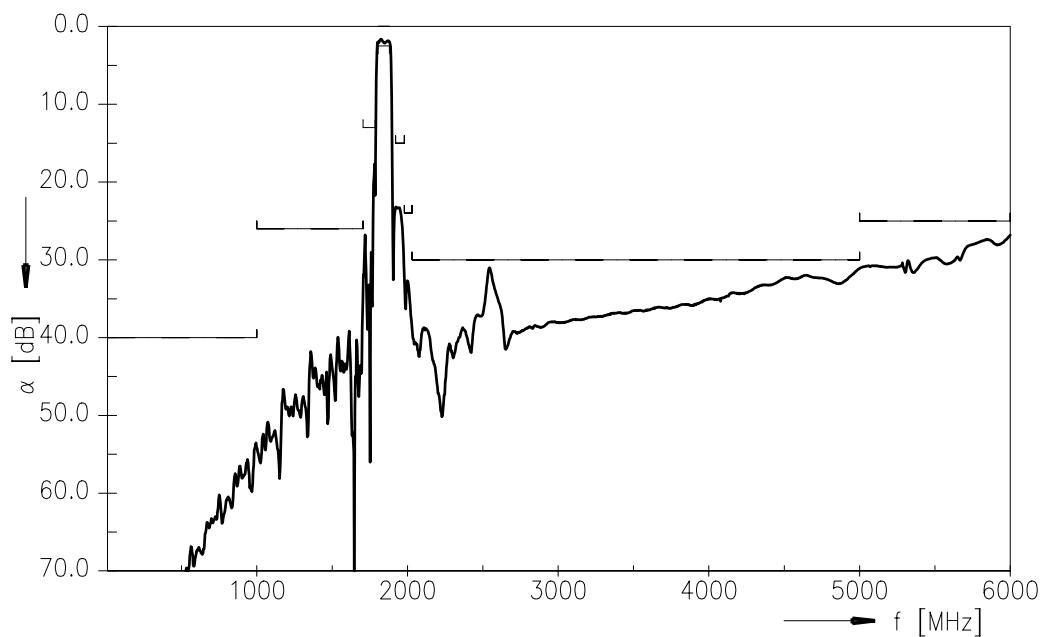

Please read *cautions and warnings* and *important notes* at the end of this document.

**SAW Components****B4235****SAW RF filter****942.5/1842.5 MHz**

Data sheet

**References**

Type	B4235
Ordering code	B39182B4235H910
Marking and package	C61157-A7-A142
Packaging	F61074-V8174-Z000
Date codes	L_1126
S-parameters	B4235_NB.s2p B4235_WB.s2p See file header for port/pin assignment table.
Soldering profile	S_6001
RoHS compatible	defined as compatible with the following documents: "DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment. 2005/618/EC from April 18th, 2005, amending Directive 2002/95/EC of the European Parliament and of the Council for the purposes of establishing the maximum concentration values for certain hazardous substances in electrical and electronic equipment."

For further information please contact your local EPCOS sales office or visit our webpage at www.epcos.com .

**Published by EPCOS AG
Surface Acoustic Wave Components Division
P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2009. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

Please read *cautions and warnings and important notes* at the end of this document.

10 February 10, 2009



Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CSSP, CTVS, DSSP, MiniBlue, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseMod, SIFERRIT, SIFI, SIKOREL, SilverCap, SIM-DAD, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.