

6427525 N E C ELECTRONICS INC

**NEC**

NEC Electronics Inc.

72C 09260 D

T-41-83


**PS2006B/B(1)**  
**HIGH SPEED**  
**PHOTO COUPLERS**  
 NEPOC SERIES

**Description**

The PS2006B and PS2006B(1) are high speed photo couplers containing a GaAsP light emitting diode and a p-n photo diode connected to a high speed transistor.

The CTR are 15%min for PS2006B and 7% min for PS2006B(1).

**Package Dimensions**

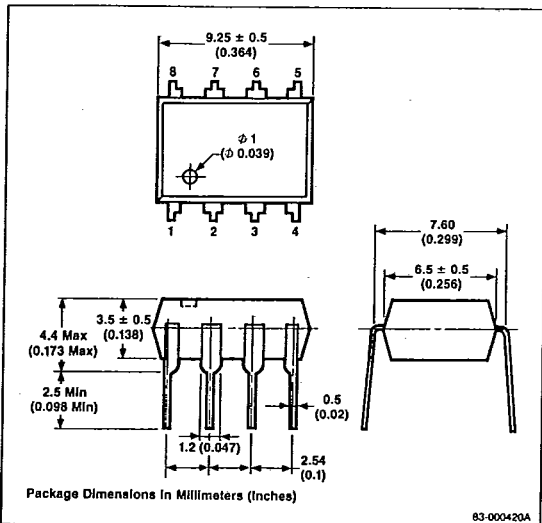

**Features**

- High isolation voltage: 3000V<sub>DC</sub> min
- High speed response: t<sub>PHL</sub>, t<sub>PLH</sub> = 300ns typ
- Compact, dual in-line plastic package
- Equivalent to 6N135, 6N136

**Applications**


- Interface circuit for various instruments and control equipment
- Floating power supply feedback networks
- Computer and peripheral manufacture
- Pulse transformer
- High speed digital and analog line receivers

**Absolute Maximum Ratings**

T<sub>A</sub> = +25°C

<b>Diode</b>	
Reverse Voltage, V <sub>R</sub>	5V
Forward Current, I <sub>F</sub>	25mA
Power Dissipation, P <sub>D</sub>	45mW
<b>Detector</b>	
Supply Voltage, V <sub>CC</sub>	-0.5V to +15V
Output Voltage, V <sub>O</sub>	-0.5V to +15V
Output Current, I <sub>O</sub>	8mA
Emitter to Base Voltage, V <sub>EB0</sub>	5V
Power Dissipation, P <sub>D</sub>	100mW
Isolation Voltage <sup>1</sup> , BV	3000V <sub>DC</sub>
Storage Temperature, T <sub>STG</sub>	-55°C to +125°C
Operating Temperature, T <sub>OPT</sub>	+55°C to +100°C

**Pin Connection**

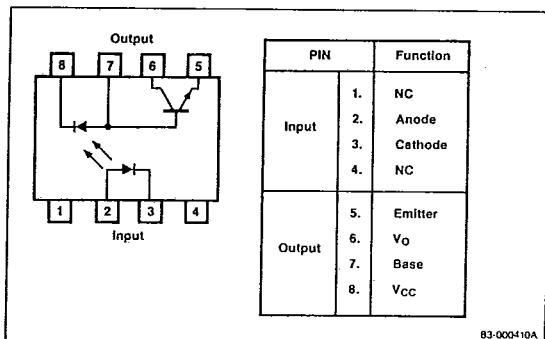

5

6427525 N E C ELECTRONICS INC

72C-09261 D T-41-83

PS2006B/B(1)

NEC

**Electrical Characteristics**


T<sub>A</sub> = +25°C

Parameter	Symbol	Limits			Unit	Test Conditions
		Min	Typ	Max		
<b>Diode</b>						
Forward Voltage	V <sub>F</sub>	1.43	1.7		V	I <sub>F</sub> = 16mA
Reverse Current	I <sub>R</sub>	0.01	10		μA	V <sub>R</sub> = 5V
Forward Voltage Temperature Coefficient	ΔV <sub>F</sub> /ΔT	-1.51			mV/°C	I <sub>F</sub> = 16mA
Capacitance	C <sub>T</sub>	60			pF	V = 0, f = 1MHz
<b>Detector</b>						
High Level Output Current	I <sub>OH</sub> <sup>1</sup>	3	500		nA	I <sub>F</sub> = 0mA, V <sub>CC</sub> = V <sub>O</sub> = 5.5V
High Level Output Current	I <sub>OH</sub> <sup>2</sup>		100		μA	I <sub>F</sub> = 00mA, V <sub>CC</sub> = V <sub>O</sub> = 15V
DC Current Gain	h <sub>FE</sub>	120				V <sub>O</sub> = 5V, I <sub>O</sub> = 3mA
<b>Coupled</b>						
Current Transfer Ratio	CTR	15/7	22		%	I <sub>F</sub> = 16mA, V <sub>CC</sub> = 4.5V, V <sub>O</sub> = 0.4V
Low Level Output Voltage	V <sub>OL</sub>	0.1	0.4		V	I <sub>F</sub> = 16mA, V <sub>CC</sub> = 4.5V, I <sub>O</sub> = 2.4mA/1.1mA
Low Level Supply Current	I <sub>CCL</sub>	50			μA	I <sub>F</sub> = 16mA, V <sub>O</sub> = Open, V <sub>CC</sub> = 15V
High Level Supply Current	I <sub>CCH</sub>	0.01	1		μA	I <sub>F</sub> = 0mA, V <sub>O</sub> = Open, V <sub>CC</sub> = 15V
Isolation Resistance	R <sub>1-2</sub>	10 <sup>12</sup>			Ω	V <sub>IN-OUT</sub> = 1kV
Isolation Capacitance	C <sub>1-2</sub>	0.7			pF	V = 0, f = 1MHz
Propagation Delay Time to Low Output Level	t <sub>PHL</sub> <sup>2</sup>	0.3/0.5	0.8/1.5		μs	I <sub>F</sub> = 16mA, V <sub>CC</sub> = 5V, R <sub>L</sub> = 1.9kΩ/4.1kΩ
Propagation Delay Time to High Output Level	t <sub>PLH</sub> <sup>2</sup>	0.3/0.8	0.8/1.5		μs	I <sub>F</sub> = 16mA, V <sub>CC</sub> = 5V, R <sub>L</sub> = 1.9kΩ/4.1kΩ

Notes: In the "Min", "Typ" and "Max" columns, figures to the left and right of the slash represent values for the PS2006B and PS2006B(1), respectively.

1. Measuring Conditions: DC voltage for 1 min at T<sub>A</sub> = +25°C, RH = 60% between input (pins 1, 2, 3, and 4 common) and output (pins 5, 6, 7, and 8 common).
2. Measuring Circuit.







**Measuring circuit**

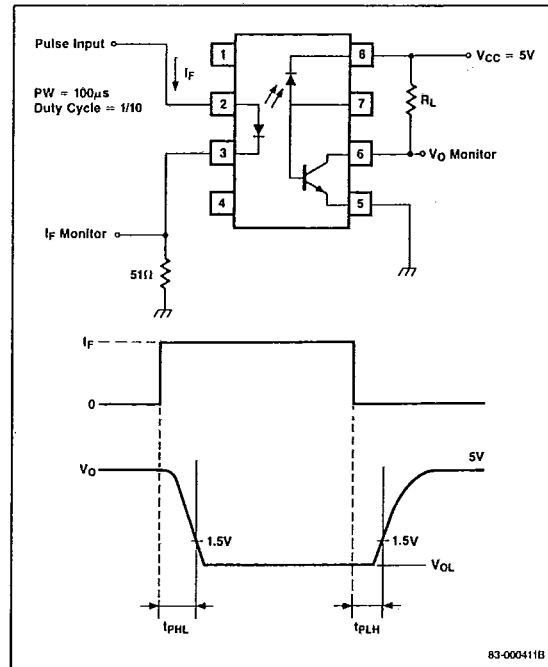

83-000411B

**Typical Characteristics**

$T_A = +25^\circ\text{C}$

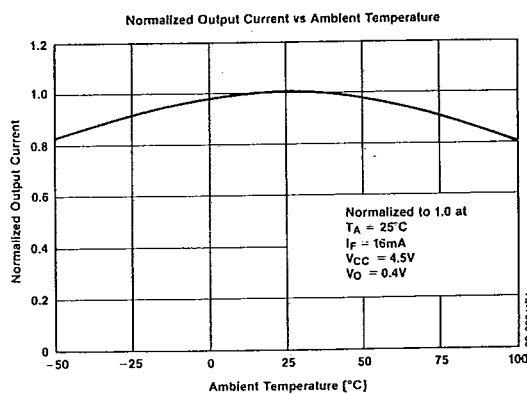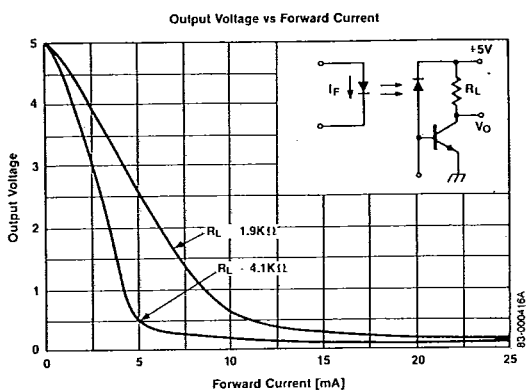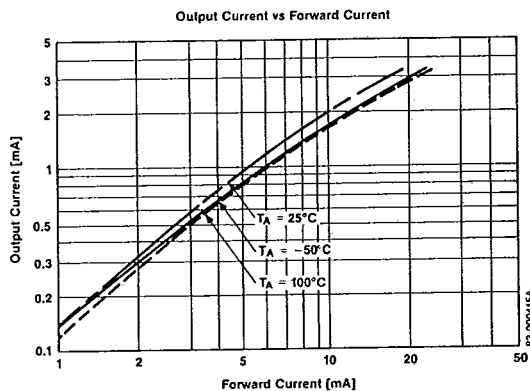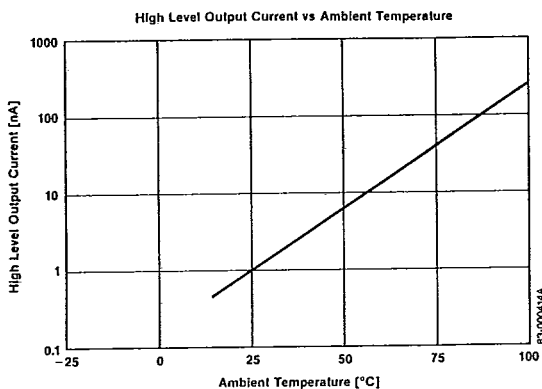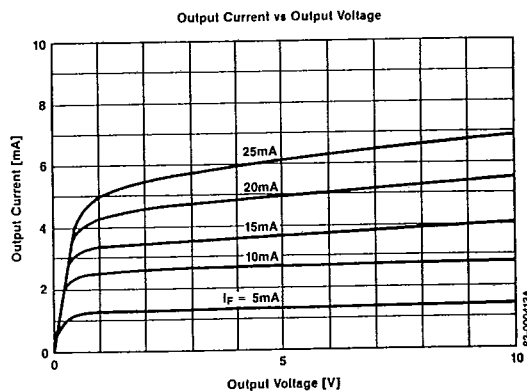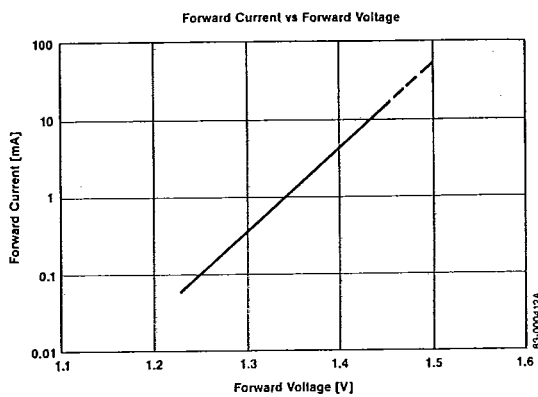

**5**

6427525 N E C ELECTRONICS INC

72C 09263 D

T-41-83

PS2006B/B(1)

**NEC**

**Typical Characteristics (cont)**

T<sub>A</sub> = +25°C

