Supplement | Accessories

# General Specifications

#### **Electrical Capacity (Resistive Load)**

Power Level (silver): 1A @ 125/250V AC or 1A @ 30V DC

Logic Level (gold): 0.4VA maximum @ 28V AC/DC maximum (Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)

Note: Find additional explanation of operating range in Supplement section.

Other Ratings

50 milliohms maximum **Contact Resistance:** 

**Insulation Resistance:** 1,000 megohms minimum @ 500V DC

**Dielectric Strength:** For Silver: 1,000V AC minimum between contacts for 1 minute minimum &

> 1,500V AC minimum between contacts & case for 1 minute minimum; For Gold: 750V AC minimum between contacts for 1 minute minimum & 1,500V AC minimum between contacts & case for 1 minute minimum

Mechanical Life: 100,000 operations minimum

**Electrical Life:** 50,000 operations minimum for silver; 100,000 operations minimum for gold **Nominal Operating Force:** Single pole 0.98 ~ 2.45N for maintained & 0.98 ~ 1.96N for momentary; Double pole 1.47 ~ 3.43N for maintained & 1.47 ~ 2.94N for momentary

**Contact Timing:** Nonshorting (break-before-make)

> Travel: Pretravel .087" (2.2mm); Overtravel .031" (0.8mm); Total Travel .118" (3.0mm)

**Materials & Finishes** 

Housing: Polyamide (UL94V-0)

**Movable Contactor:** Silver for power circuit; copper with gold plating for logic level circuit Silver for power circuit; copper with gold plating for logic level circuit **Stationary Contacts:** 

**Housing Base:** Polyamide (UL94V-0)

**Terminal Base: Polyester** 

Phosphor bronze with silver flash plating for power circuit; Common Terminals:

Phosphor bronze with gold flash plating for logic level circuit

**End Terminals:** Brass with silver flash plating for power circuit;

Brass with gold flash plating for logic level circuit

**Lamp Terminals:** Phosphor bronze with nickel flash plating

**Environmental Data** 

**Operating Temperature Range:** -25°C through +50°C (-13°F through +122°F) for Illuminated

-25°C through +70°C (-13°F through +158°F) for Nonilluminated

**Humidity:** 90 ~ 95% humidity for 96 hours @ 40°C (104°F)

Vibration: 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning

in 1 minute; 3 right angled directions for 2 hours

50G (490m/s<sup>2</sup>) acceleration (tested in 6 right angled directions, with 3 shocks in each direction) Shock:

Installation

**Mounting Torque:** 0.78Nm (6.9 lb•in) maximum

Cap Installation Force: 4.51N (1.0 lbf) maximum downward force on cap Soldering Time & Temperature: Manual Soldering: See Profile A in Supplement section.

**Standards & Certifications** 

Flammability Standards: UL94V-0 housing & housing base

File No. E44145

Single & double pole models recognized at 1A @ 125/250V AC, 1A @ 30V DC, & 0.4VA @ 28V DC.

Add "/U" to end of part number to order UL mark on switch. Add "/CUL" to end of part number to order cULus mark on switch.

CSA: File No. 023535\_0\_000

Single & double pole models recognized at 1A @ 125/250V AC, 1A @ 30V DC, & 0.4VA @ 28V DC.

Add "/C" to end of part number to order CSA mark on switch.



**D23** 

## Distinctive Characteristics

Bright illumination with numerous color variations. Spot illumination available. Square, rectangular, and round shaped caps.

Front panel relamping.

Choice of bright or super bright LEDs in red, amber, green, white, and blue.

Latchdown feature gives indication of circuit status. Audible and tactile feedback with smooth and responsive operation.

Snap-action mechanism for long life.

Stainless steel frame on snap-in models has a specially designed projection, which prevents rotation and correctly orients switch in panel.

12mm body diameter.

Molded-in terminals lock out flux, dust, and other contaminants.


8mm panel thickness capability. Rear panel bushing or snap-in mounting.

Optional PCB adaptors in straight and right angle types.

Matching indicators available.










#### TYPICAL SWITCH ORDERING EXAMPLE

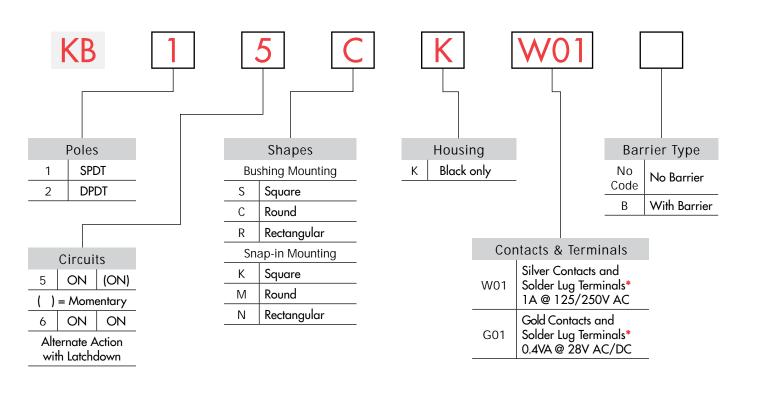

\* Wire harness & cable assemblies offered only in Americas

#### noted on General Specifications page.

www.nkk.com

IMPORTANT:


Switches are supplied without UL, cULus, & CSA markings unless

specified. Specific models & ratings

## DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

#### KB15CKW01-12-FF



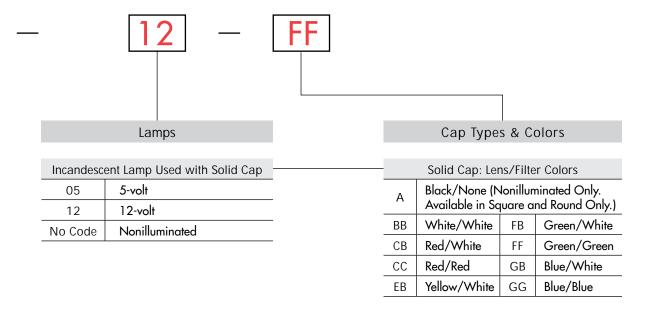

| Incandescer | Incandescent or Neon Used with Insert Cap |  |                | Insert Cap: Lens/Filter Colors    |  |  |
|-------------|---|--|----------------|-----------------------------------|--|--|
| 05          | 5-volt                                    |  | JB Clear/White |                                   |  |  |
| 12          | 12-volt                                   |  | JC             | Clear/Red                         |  |  |
| 01          | 110-volt Neon                             |  | JE             | Clear/Yellow                      |  |  |
| No Code     | Nonilluminated                            |  | * JF           | Clear/Green                       |  |  |
|             |   |  | *JG            | Clear/Blue                        |  |  |
|             |   |  |                | * JF & JG not suitable with neon. |  |  |

| Bright LED Used with Cap for LED |                            |    |                        |   | LED Cap: Lens/Diffuser Colors |             |
|----------------------------------|----------------------------|----|------------------------|---|-------------------------------|-------------|
| Colors Resistor                  |                            |    | AB                     | Square Spot Illuminated<br>Black Cap/White Window |                               |             |
| 5C                               | 5C Red No Code No Resistor |    | Black Cap/White Window |   |                               |             |
|                                  |                            | 05 | 5-volt                 | -   | JB                            | Clear/White |
| 5D                               | Amber                      | 12 | 12-volt                | -   | JC                            | Clear/Red   |
|                                  | Green                      |    |                        | -   |                               | Clear/Amber |
| 5F Green 24 24-volt              |                            |    | Clear/Green            |   |                               |             |
|                                  |                            |    |                        |   |                               | 0.00.7 0.00 |

| Super |       |   |
|-------|-------|---|
| 6B    | White | - |
| 6F    | Green | - |
| 6G    | Blue  | - |
|       |       | = |

| - |    | LED Cap: Lens/Diffuser Colors |
|---|----|-------------------------------|
| Ī | JB | Clear/White                   |
|   |    |                               |

Supplement

### **CONTACT MATERIALS, RATINGS & TERMINALS**

**Silver Contacts** 

**Power Level** 1A @ 125V AC & 250V AC

Solder Lug



**Gold Contacts** 

**Logic Level** 0.4VA maximum @ 28V AC/DC

Complete explanation of operating range in Supplement section.

#### AT055 Crossover Guard

A partitioned plastic guard is supplied with each switch to provide insulation between terminals.

Installation steps:

- 1. Identify wire-to-terminal connections.
- 2. Thread wires through the guard.
- 3. Solder the connections.
- 4. Push the guard fully onto the switch body.

#### **BARRIER TYPE**



No Barrier Built-in bezel




#### With Barrier

Built-in barrier only available for Square and Rectangular

#### LAMP COLORS & SPECIFICATIONS

The electrical specifications shown are determined at a basic temperature of 25°C. LED circuit is isolated and requires external power source. Polarity marks are on the bottom of the switch. If the source voltage exceeds the rated voltage, a ballast resistor is required. The resistor value can be calculated by using the formula in the Supplement section. Ambient Temperature Range for lamps below: −25°C ~ +50°C.

#### **Incandescent & Neon Lamps**

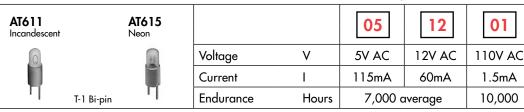


Recommended Resistors for Neon: 33K ohms for 110V AC; 100K ohms for 220V AC

No Code


No Lamp


#### **Bright LFD** with Resistor

| bright LLD Willi Resision      |                                |              |           |                 |          |      |      |
|--------------------------------|--------------------------------|--------------|-----------|-----------------|----------|------|------|
| AT634                          | Red Amber Green Resistor Codes |              |           |                 | <b>i</b> |      |      |
| LEDs are colored in OFF state. | Color Codes:                   | <b>5C</b>    | <b>5D</b> | <b>5F</b>       | 05       | 12   | 24   |
| in Off State.                  | Forward Peak                   | Current      |           | I <sub>FM</sub> | _        | _    | _    |
| Cathorine.                     | Continuous For                 | ward Currer  | nt        | I <sub>F</sub>  | 25mA     | 20mA | 10mA |
|                                | Forward Voltage                |              |           | V <sub>F</sub>  | 5V       | 12V  | 24V  |
| 1.                             | Reverse Peak Voltage           |              |           | V <sub>RM</sub> | 4V       | 8V   | 16V  |
| T-1 ¼ Bi-pin                   | Current Reduct                 | ion Rate Abo | ove 25°C  | $\Delta I_{F}$  | _        | _    | _    |












| LAMP COLORS & SPECIF                  | ICATION  | IS   |   |   |
|---------------------------------------|--|--|---|---|
| Bright LED without Resis              | tor  |  |   |   |
| Red Amber                             | Green  | No Code No Resistor  |   |   |
| Color Codes                           | ЭГ   | Red  | Amber   | Green   |
| Forward Peak Current                  | I <sub>FM</sub>  | 30mA   | 30mA  | 30mA  |
| Continuous Forward Current            | l <sub>F</sub>   | 20mA   | 20mA  | 20mA  |
| Forward Voltage                       | V <sub>F</sub>   | 1.9V   | 2.0V  | 2.1V  |
| Reverse Peak Voltage                  | $V_{_{RM}}$  | 5V   | 5V  | 5V  |
| Current Reduction Rate Above 25°C     | $\Delta I_{_{\rm F}}$  |  | 0.42mA/°C   |   |
| Ambient Temperature Range             |  |  | −25° ~ +50°C  | •   |
| Super Bright Single Elemer            | nt LED   |  |   |   |
| ATTENTION ELECTROSTATIC ELECTROSTATIC |  | 6B   | 6F  | 6G  |
|                                       | Color  |  | Green   | Blue  |
|                                       | I <sub>FM</sub>  |  | 30mA  | 30mA  |
| Continuous Forward Current            | l <sub>F</sub>   | 20mA   | 20mA  | 20mA  |
| Forward Voltage                       | $V_{_{\rm F}}$   | 3.6V   | 3.5V  | 3.6V  |
| Reverse Peak Voltage                  | $V_{_{RM}}$  | 5V   | 5V  | 5V  |
| Current Reduction Rate Above 25°C     | $\Delta I_{_{\rm F}}$  | 0.50mA/°C  | 0.50mA/°C   | 0.50mA/°C   |
| Ambient Temperature Range             |  | −25° ~ +50°C   |   |   |
| CAP TYPES & COLOR COM                 | BINATIC  | NS   |   |   |
| B White C Red E                       | Yellow   | F Green  | <b>G</b> Blue   | <b>J</b> Clear  |
| Solid Cap for Incandescent Lamp & I   | Nonilluminat   | ted  |   | $\wedge$  |
| AT486<br>AT485 Round                  | ı  | <b>NT4021</b>  | T   |   |
|                                       | Red Amber  Color Codes  Forward Peak Current  Continuous Forward Current  Forward Voltage  Reverse Peak Voltage  Current Reduction Rate Above 25°C  Ambient Temperature Range  Super Bright Single Element  ATTENTION ELECTROSTATIC SENSITIVE DEVICES  Forward Peak Current  Continuous Forward Current  Forward Voltage  Reverse Peak Voltage  Current Reduction Rate Above 25°C  Ambient Temperature Range  CAP TYPES & COLOR CON  B White C Red E  Solid Cap for Incandescent Lamp & AT486  Based | Red Amber Green  Solid Cap for Incandescent Lamp & Nonilluminat  Red Amber Green  Soly 5D 5F  Forward Peak Current I <sub>FM</sub> Continuous Forward Current I <sub>F</sub> Forward Voltage V <sub>RM</sub> Current Reduction Rate Above 25°C ΔI <sub>F</sub> Ambient Temperature Range  Super Bright Single Element LED  ATTENTION ELECTROSTATIC SENSITIVE DEVICES  Color  Forward Peak Current I <sub>FM</sub> Continuous Forward Current I <sub>FM</sub> Continuous Forward Current I <sub>FM</sub> Current Reduction Rate Above 25°C ΔI <sub>F</sub> Ambient Temperature Range  CAP TYPES & COLOR COMBINATION  B White C Red E Yellow  Solid Cap for Incandescent Lamp & Nonilluminations  AT486  Based | Red Amber Green  ST ST ST Red  Color Codes  Forward Peak Current  Continuous Forward Current  Forward Voltage  Reverse Peak Voltage  Current Reduction Rate Above 25°C  Ambient Temperature Range  Super Bright Single Element LED  ATTENTION  ELECTROSTATIC  SENSITIVE DEVICES  Color  White  Forward Peak Current  Forward Voltage  V <sub>F</sub> 3.6V  Reverse Peak Voltage  V <sub>RM</sub> SV  Current Reduction Rate Above 25°C  Ambient Temperature Range  CAP TYPES & COLOR COMBINATIONS  B White  C Red  E Yellow  F Green  Solid Cap for Incandescent Lamp & Nonilluminated | Bright LED without Resistor  Red Amber Green Forward Peak Current  Continuous Forward Current  Forward Voltage  Current Reduction Rate Above 25°C  Ambient Temperature Range  Forward Peak Current  Super Bright Single Element LED  ATTENTION ELECTROSTATIC SENSITIVE DEVICES  Color  Forward Voltage  V <sub>F</sub> Current Reduction Rate Above 25°C  Color  White  Green  Forward Peak Current  I <sub>FM</sub> JOMA  JOMA  JOMA  JOMA  JOMA  JOMA  JOMA  Green  Forward Peak Current  I <sub>FM</sub> JOMA  Continuous Forward Current  I <sub>F</sub> JOMA  Continuous Forward Current  I <sub>F</sub> JOMA  JOMA  JOMA  JOMA  Continuous Forward Current  I <sub>F</sub> JOMA  JOMA  JOMA  Continuous Forward Current  I <sub>F</sub> JOMA  JOMA  JOMA  JOMA  JOMA  JOMA  Continuous Forward Current  I <sub>F</sub> JOMA  JOMA  JOMA  JOMA  JOMA  Continuous Forward Current  I <sub>F</sub> JOMA  JOMA  JOMA  JOMA  JOMA  JOMA  JOMA  Continuous Forward Current  I <sub>F</sub> JOMA  JOMA |















Material: Polycarbonate

Rectangular



Translucent Colored Lens Translucent Colored Filter




Insert Cap for Incandescent or Neon Lamp & Nonilluminated

**AT488** Round


#### Lens/Filter Colors Available:










AT487











#### **CAP TYPES & COLOR COMBINATIONS**

**Color Codes:** A Black **B** White C Red **D** Amber E Yellow **G** Blue J Clear F Green


#### Spot Illuminated Cap for Bright LED without Resistor or with Resistor

#### Cap/Window Colors Available:



Opaque Black Cap with **Translucent White Window** for Spot Illumination

AT4051 Square









**Bright LED Bright LED** AT635 AT634

Material: Polycarbonate Finish: Matte

#### Cap for Bright LED without Resistor or LED with Resistor

Lens/Diffuser Colors Available: (AT4133, 4132, 4134 white diffusers; AT4158, 4160, 4159 colored diffusers)



AT4133

AT4132

AT4134

Square

Round

Rectangular

Transparent Clear Lens



AT4158

AT4160


AT4159





Translucent Diffuser















Material: Polycarbonate Finish: Glossy

**Bright LED** AT635


**Bright LED** AT634

#### Cap for Super Bright LED

#### Lens/Diffuser Colors Available:



AT4133 Square



AT4132

Round

AT4134 Rectangular




Translucent Clear Lens



Translucent White Diffuser



Super Bright LEDs AT625 AT631 AT632





Material: Polycarbonate

Finish: Glossy



Toggles

# Supplement | Accessories


#### TYPICAL SWITCH DIMENSIONS


#### Square • Bushing Mount


**Series KB** 

#### Single & Double Pole










KB15SKW01-05-GG


Single pole models do not have terminals 4, 5, & 6.


**Round • Bushing Mount** 

Single & Double Pole










KB25CKW01-05-GG


Single pole models do not have terminals 4, 5, & 6.


#### Rectangular • Bushing Mount

Single & Double Pole









KB15RKW01-05-GG


Single pole models do not have terminals 4, 5, & 6.





#### TYPICAL SWITCH DIMENSIONS

#### Single & Double Pole

Square • Snap-in Mount











Single pole models do not have terminals 4, 5, & 6.


KB16KKW01-05-CB

### Single & Double Pole

Round • Snap-in Mount











Single pole models do not have terminals 4, 5, & 6.


KB26MKW01-05-CB

#### Single & Double Pole

Rectangular • Snap-in Mount









Single pole models do not have terminals 4, 5, & 6.

KB16NKW01-05-CB




Rotaries

Touch


# Supplement | Accessories


#### TYPICAL SWITCH DIMENSIONS

#### Square • Barrier • Bushing Mount



#### Single & Double Pole






KB15SKW01B-6G-JB


Single pole models do not have terminals 4, 5, & 6.


Square • Barrier • Snap-in Mount





Single & Double Pole







KB15KKW01B-5C-JC


Single pole models do not have terminals 4, 5, & 6.


#### Rectangular • Barrier • Bushing Mount





Single & Double Pole






KB15RKW01B-5F-JF


Single pole models do not have terminals 4, 5, & 6.

#### Rectangular • Barrier • Snap-in Mount



(18.5) .728

(1.0) x (2.0) Typ .039 x .079 (0.2) Typ √.008 (1.8) Typ .071 (5.3) .209 (8.8) .346 (1.0)



KB15NKW01B-5D-JD

Single pole models do not have terminals 4, 5, & 6.

#### **OPTIONAL ACCESSORIES**

#### **PCB Adaptors**


AT701 **Single Pole** Straight PC **Terminals** 



















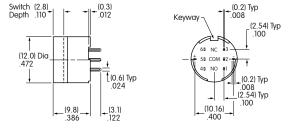




Material: Glass fiber reinforced polyamide Note: Order adaptors separately

#### **Dust Covers**


Panel Thickness Range: .020 ~ .268" (0.5 ~ 6.8mm) for Bushing Mounting; .020 ~ .079" (0.5 ~ 2.0mm) for Snap-in Mounting Dust Covers reduce the depth of switch behind panel by .047" (1.2mm).


#### AT495 For Square & Round (not for Barrier type)





AT4025 For Rectangular (not for Barrier type)











PVC loses pliability below 0°C (32°F). Lid: PVC Base: Polyamide

Indicators

#### **OPTIONAL ACCESSORIES**


#### **Protective Guards**

#### AT494 For Square & Round (not for Barrier type)



AT4024 For Rectangular (not for Barrier type)



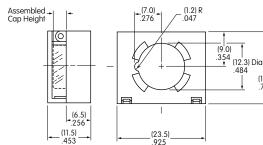


Panel Thickness Range:

.020" ~ .268"  $(0.5 \sim 6.8 \text{mm})$ for Bushing Mounting

.020" ~ .091"  $(0.5 \sim 2.3 \text{mm})$ for Snap-in Mounting

Protective Guards reduce the depth of switch behind panel by .047" (1.2mm).

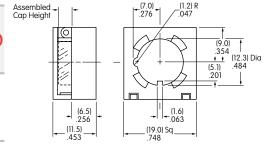


Material: Cover: Polycarbonate Base: Polyamide

#### **ASSEMBLY INSTRUCTIONS**

#### Cap Removal & Installation


For alternate action models cap must be in UP position for cap removal. Indentations on opposite sides of the cap provide an easy way to lift the cap out of the holder, using either the finger nails, or cap extractor AT109.




#### **LED Polarity & Orientation in Lamp Socket**

Super Bright LEDs AT625, AT631, & AT632 are electrostatic sensitive.








#### **Cap Replacement**

Note that the cap has a pair of round tabs and a pair of long tabs which should be used for correctly replacing the cap in its holder. Using the long tabs as guides, slide the cap with the long tabs moving into the slots on opposite sides of the cap holder. Then, the round tabs will snap into notches on the other two sides of the holder.



#### AT109 Cap Extractor








#### AT108 Socket Wrench for Bushing Mounting

Overtightening the mounting nut may damage the switch housing.



Miniatu

### TYPICAL SWITCH ORDERING EXAMPLE

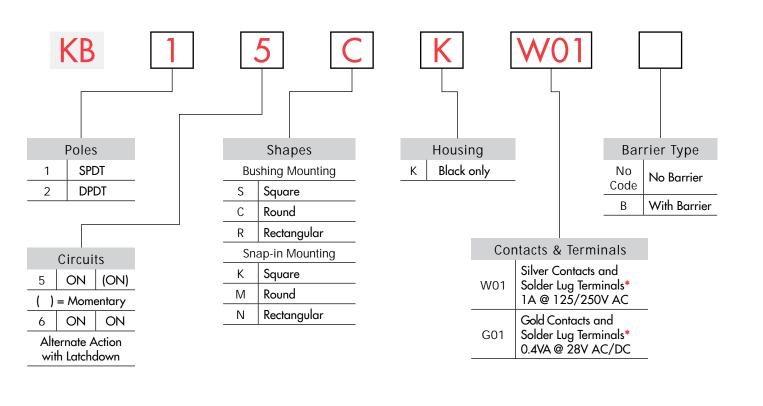

\* Wire harness & cable assemblies offered only in Americas

#### IMPORTANT:



Switches are supplied without UL, cULus, & CSA markings unless specified. Specific models & ratings noted on General Specifications page.

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

KB15CKW01-12-FF



www.nkk.com

#### Cap Types & Colors Lamps Incandescent Lamp Used with Solid Cap Solid Cap: Lens/Filter Colors 05 5-volt Black/None (Nonilluminated Only. Available in Square and Round Only.) 12-volt 12 BB White/White FB Green/White Nonilluminated No Code Red/White FF CB Green/Green CC Red/Red GB Blue/White Yellow/White GG Blue/Blue EB

| Incandescer |                |  | Insert Cap: Lens/Filter Colors |                                   |  |
|-------------|----------------|--|--------------------------------|-----------------------------------|--|
| 05          | 5-volt         |  | JB Clear/White                 |                                   |  |
| 12          | 12-volt        |  | JC                             | Clear/Red                         |  |
| 01          | 110-volt Neon  |  | JE                             | Clear/Yellow                      |  |
| No Code     | Nonilluminated |  | * JF                           | Clear/Green                       |  |
|             |                |  | *JG                            | Clear/Blue                        |  |
|             |                |  |                                | * JF & JG not suitable with neon. |  |

| Bright LED Used with Cap for LED |          |         |             |   | LED Cap: Lens/Diffuser Colors |                        |
|----------------------------------|----------|---------|-------------|---|-------------------------------|------------------------|
| Colors Resistor                  |          | _       | AB          | Square Spot Illuminated<br>Black Cap/White Window |                               |                        |
| 5C                               | Red      | No Code | No Resistor |   |                               | Black Cap/White Window |
|                                  | 100      | 05      | 5-volt      |   | JB                            | Clear/White            |
| 5D                               | Amber    | 12      | 12-volt     | -   | JC                            | Clear/Red              |
| 5F                               | 5F Green | 24      | 24-volt     | -   | JD                            | Clear/Amber            |
|                                  | 1        |         |             | -   | JF                            | Clear/Green            |

|   | Super Bright LED Used with Cap for LED |       |   |  |  |
|---|--|-------|---|--|--|
|   | 6B                                     | White | _ |  |  |
|   | 6F                                     | Green | _ |  |  |
|   | 6G                                     | Blue  | _ |  |  |
| _ |  |       | - |  |  |

LED Cap: Lens/Diffuser Colors

JB Clear/White