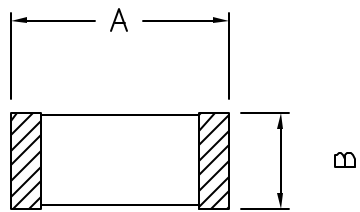
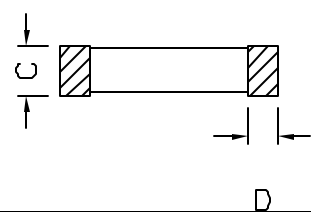
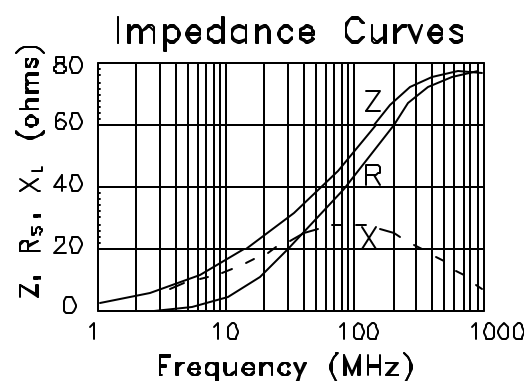


XFMRS, Inc.

SPECIFICATION FOR APPROVAL

XFMRS P/N : XFEB321611-500-3A				Rev: A/3													
DIMENSION : (m/m) <div style="text-align: center; margin: 10px 0;">  </div> <div style="text-align: center; margin: 10px 0;">  </div>				<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%; text-align: center;">A</td> <td style="width: 50%; text-align: center;">3.2±0.2</td> <td style="width: 40%; text-align: center;">m/m</td> </tr> <tr> <td style="text-align: center;">B</td> <td style="text-align: center;">1.6±0.2</td> <td style="text-align: center;">m/m</td> </tr> <tr> <td style="text-align: center;">C</td> <td style="text-align: center;">1.1±0.2</td> <td style="text-align: center;">m/m</td> </tr> <tr> <td style="text-align: center;">D</td> <td style="text-align: center;">0.5±0.3</td> <td style="text-align: center;">m/m</td> </tr> </table>		A	3.2±0.2	m/m	B	1.6±0.2	m/m	C	1.1±0.2	m/m	D	0.5±0.3	m/m
A	3.2±0.2	m/m															
B	1.6±0.2	m/m															
C	1.1±0.2	m/m															
D	0.5±0.3	m/m															
<div style="text-align: center;">  </div>																	
ELECTRICAL REQUIREMENTS				TEST INSTRUMENTS													
Z	50±25% Ohms	TEST FREQ.	100	MHz	<ul style="list-style-type: none"> ○ HP 34401A MULTIMETER ○ HP 4195 NETWORKS/SPECTRUM ANALYZER ○ HP 42841 BIAS CURRENT SOURCE ○ HP 4285A LCR METER ○ HP 4286A RF LCR METER ● HP 4291A RF IMPEDANCE / MATERIAL ANALYZER ○ HP 4338A MILLION OHM METER ○ HP 6632A DC POWER SUPPLY ○ HP4284A PRECISION LCR METER 												
Q		TEST FREQ.		MHz													
SRF		TEST FREQ.		MHz													
Rdc	0.025 Ohms Max	TEST FREQ.		MHz													
Idc	3000mA MAX.	TEST FREQ.		MHz													
		TEST FREQ.															
		TEST FREQ.															
DRAWN BY :		CHECKED BY :		APPROVED BY :													
LI Xiaofeng		Liao		JH													