



1N5391G THRU 1N5399G

GLASS PASSIVATED JUNCTION RECTIFIER


Reverse Voltage - 50 to 1000 Volts

Forward Current - 1.5 Amperes

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- High temperature metallurgically bonded construction
- Glass passivated cavity-free junction
- Capable of meeting environmental standards of MIL-S-19500
- 1.5 ampere operation at $T_A=70^\circ\text{C}$ with no thermal runaway
- Typical I_R less than $0.1 \mu\text{A}$
- High temperature soldering guaranteed: $350^\circ\text{C}/10$ seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

DO-15

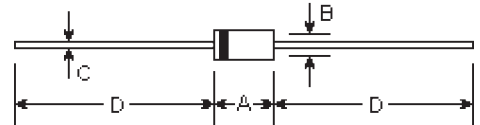

Mechanical Data

- **Case:** DO-15 molded plastic over glass body
- **Terminals:** Plated axial leads, solderable per MIL-STD-750, method 2026
- **Polarity:** Color band denotes cathode end
- **Mounting Position:** Any
- **Weight:** 0.014 ounce, 0.395 gram

DIMENSIONS					
DIM	inches		mm		Note
	Min.	Max.	Min.	Max.	
A	0.228	0.299	5.8	7.6	
B	0.102	0.142	2.6	3.6	ϕ
C	0.028	0.034	0.71	0.86	ϕ
D	1.000	-	25.40	-	

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

	Symbols	1N5391G	1N5392G	1N5393G	1N5394G	1N5395G	1N5396G	1N5397G	1N5398G	1N5399G	Units
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	300	400	500	600	800	1000	Volts
Maximum RMS voltage	V_{RMS}	35	70	140	210	280	350	420	560	700	Volts
Maximum DC blocking voltage	V_{DC}	50	100	200	300	400	500	600	800	1000	Volts
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_L=70^\circ\text{C}$	$I_{(AV)}$	1.5									Amps
Peak forward surge current 8.3mS single half sine-wave superimposed on rated load (MIL-STD-750D 4066 method)	I_{FSM}	50.0									Amps
Maximum instantaneous forward voltage at 1.5A, $T_A=70^\circ\text{C}$	V_F	1.4									Volts
Maximum DC reverse current at rated DC blocking voltage $T_A=25^\circ\text{C}$ $T_A=150^\circ\text{C}$	I_R	5.0 300.0									μA
Typical reverse recovery time (Note 1)	T_{rr}	2.0									μS
Typical junction capacitance (Note 2)	C_j	15.0									μF
Typical thermal resistance (Note 3)	$R_{\theta JA}$	45.0									$^\circ\text{C}/\text{W}$
Operating junction and storage temperature range	T_J, T_{STG}	-65 to +175									$^\circ\text{C}$

Notes:

- (1) Reverse recovery test conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_T=0.25\text{A}$
- (2) Measured at 1.0MHz and applied reverse voltage of 4.0 volts
- (3) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

RATINGS AND CHARACTERISTIC CURVES

