


30 Amp Ultra Fast Recovery Rectifier UF3060 — UF3080

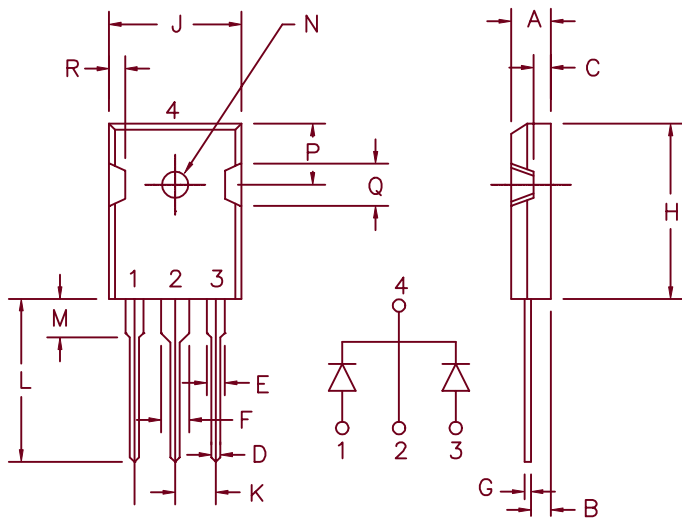

Similar to TO-247AD

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.185	.209	4.70	5.31	
B	.087	.102	2.21	2.59	
C	.059	.098	1.50	2.49	
D	.040	.055	1.02	1.40	
E	.079	.094	2.01	2.39	
F	.118	.133	3.00	3.38	
G	.016	.031	.410	0.78	
H	.819	.883	20.80	22.4	
J	.627	.650	15.93	16.5	
K	.215	—	5.46	—	Typ.
L	.790	.810	20.07	20.6	
M	.157	.180	3.99	4.57	
N	.139	.144	3.53	3.66	Dia.
P	.255	.300	6.48	7.62	
Q	.170	.210	4.32	5.33	
R	.080	.110	2.03	2.79	

Microsemi Catalog
Number

UF3060
UF3070
UF3080

Repetitive Peak
Reverse Voltage

600V
700V
800V

Transient Peak
Reverse Voltage

600V
700V
800V

- Ultra Fast Recovery Rectifier
- 2 x 15 Amp current rating
- trr 70nS maximum
- Non isolated base
- 175°C junction temperature
- V_{RRM} 600 to 800 volts

Electrical Characteristics

Average forward current per pkg	$I_F(AV)$ 30 Amps	$T_C = 150^\circ C$, square wave, $R_{\theta JC} = .75^\circ C/W$
Average forward current per leg	$I_F(AV)$ 15 Amp	$T_C = 150^\circ C$, square wave, $R_{\theta JC} = 1.5^\circ C/W$
Maximum surge current per leg	I_{FSM} 200 Amps	8.3ms, half sine, $T_J = 175^\circ C$
Max. peak forward voltage per leg	V_{FM} 1.2 Volts	$I_{FM} = 15A$, $T_J = 25^\circ C^*$
Max. peak reverse current per leg	I_{RM} 10 μA	V_{RRM} , $T_J = 25^\circ C$
Typical junction capacitance	C_J 64 pF	$VR = 10V$, $T_J = 25^\circ C$
Max. reverse recovery time	trr 70nS	1/2A, 1A, 1/4A, $T_J = 25^\circ C$

*Pulse test: Pulse width 300 μsec . Duty Cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T_{STG}	$-55^\circ C$ to $+175^\circ C$
Operating junction temp range	T_J	$-55^\circ C$ to $+175^\circ C$
Max thermal resistance per leg	$R_{\theta JC}$	1.5°C/W Junction to case
Max thermal resistance per pkg	$R_{\theta JC}$.75°C/W Junction to case
Mounting torque		8–10 inch pounds (#6 screw)
Weight		.22 ounces (6.36 grams) typical

7-27-00 Rev. 1

UF3060 — UF3080

Figure 1
Typical Forward Characteristics — Per Leg

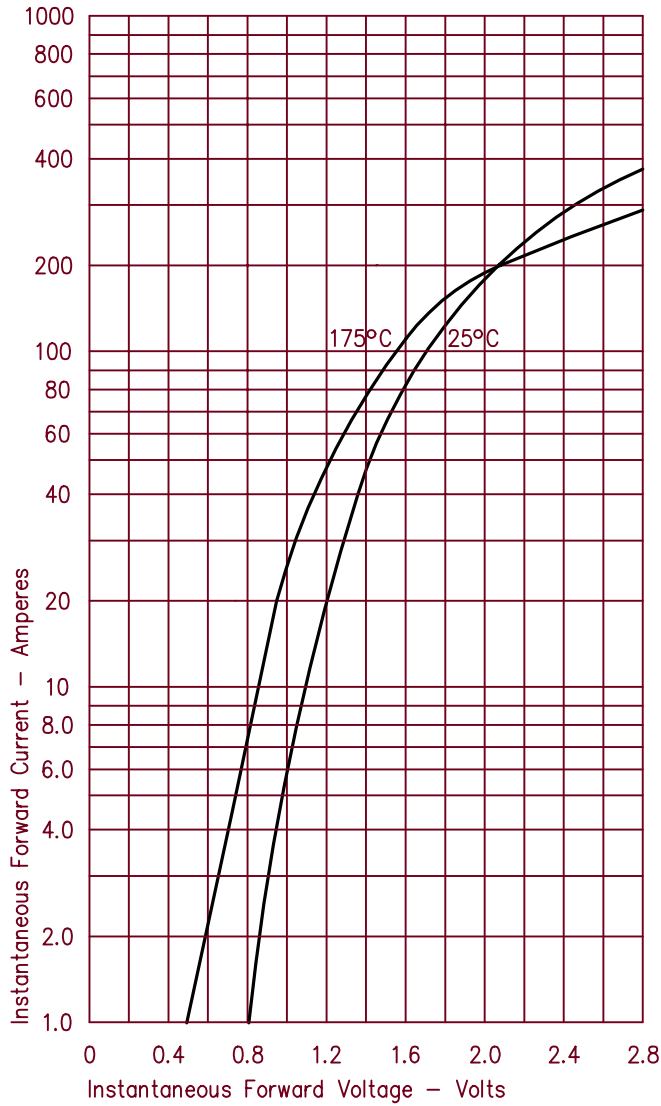


Figure 3
Typical Junction Capacitance — Per Leg

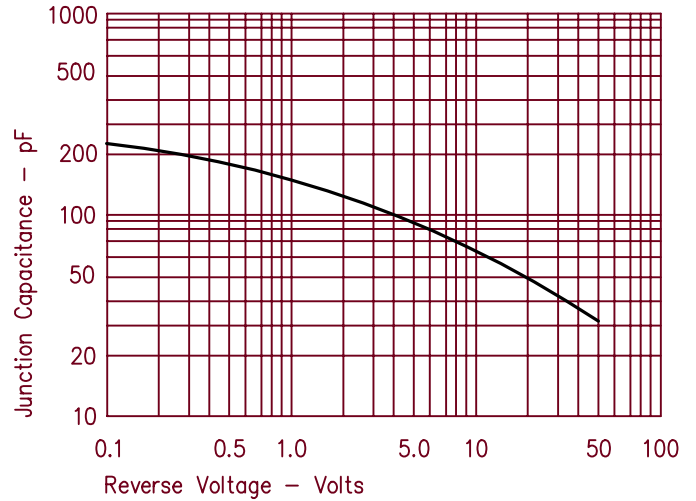


Figure 4
Forward Current Derating — Per Leg

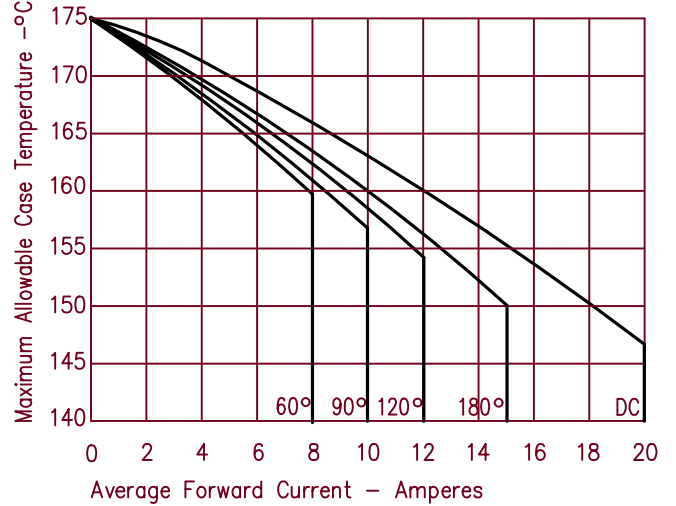


Figure 2
Typical Reverse Characteristics — Per Leg

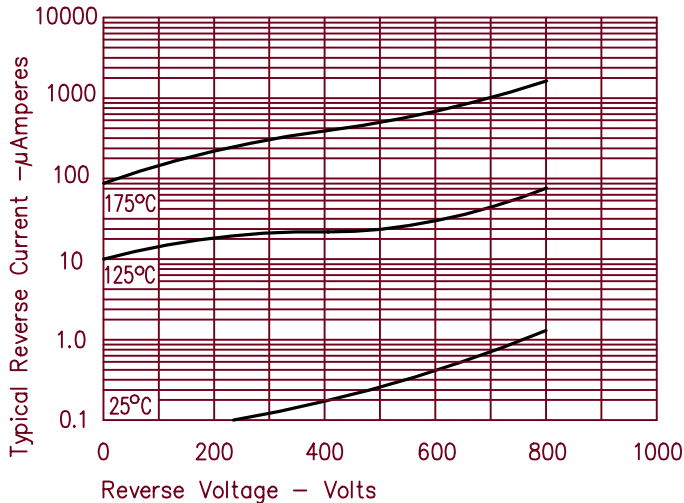


Figure 5
Maximum Forward Power Dissipation — Per Leg

