


Coaxial Line Stretchers

HLS Series

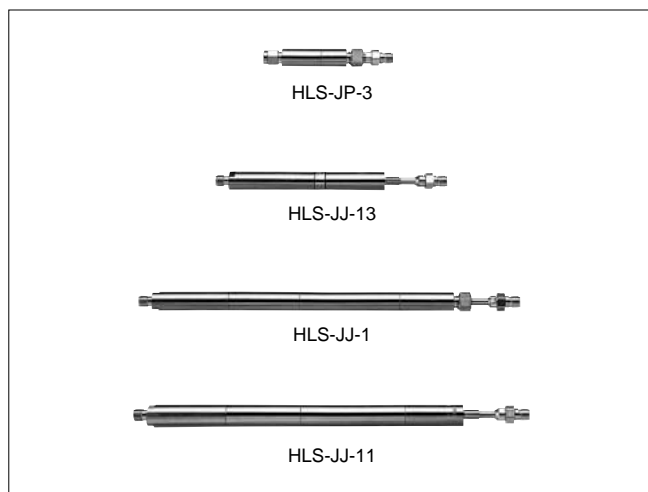

These coaxial line stretchers maintain an impedance of 50Ω while changing the length of the coaxial tube and adjusting the phase. One type is locked after the adjustment and another type can be used in mechanical drive applications.

These line stretchers are well suited for use in phase adjustment, impedance matching, and signal combining.

■Features

1.Three Types of Adjustable Lengths

Adjustable lengths are available in these three types: 10 mm, 37.5 mm, and 75 mm.

2.High Reliability

Stainless steel is used for the connector portion and the gold plating high reliability.

■Product Specifications

| Ratings | Frequency range (Note) Characteristic impedance Maximum Input Power | DC to 10.0 GHz 50 ohms 50 W | Operating temperature range Operating relative humidity | -10°C to +65°C 95% Max. |
|---------|---|-----------------------------------|--|----------------------------|
|---------|---|-----------------------------------|--|----------------------------|

NOTE: The frequency range will depend on the model.

| Item | Standard | Conditions |
|---------------------|--|--|
| 1.Vibration | No electrical discontinuity of 1 μs or more No damage, cracks, or parts dislocation | Frequency of 10 to 55 Hz, overall amplitude of 1.5 mm for 2 hours in each of 3 directions |
| 2.Shock | | Acceleration of 98 m/s ² , sine half-wave waveform, 3 cycles in each of the 3 axis |
| 3.Temperature cycle | No damage, cracks, or parts dislocation | Temperature: -30°C→+5°C to +35°C→+70°C→+5°C to +35°C Time: 30→15 max.→30→15 max. (Minutes) 5 cycles |

●The test method conforms to MIL-STD-202.

■Materials

| Part | Material | Finish |
|----------------|--------------------------|--------------|
| Body | Stainless steel | Gold plating |
| Connector Body | Brass | Gold plating |
| Coupling | Stainless steel | Gold plating |
| Female contact | Beryllium copper | Gold plating |
| Male contact | Brass | Gold plating |
| Insulator | PTFE | ----- |
| Coaxial tube | UT-141A semi-rigid cable | Gold plating |
| Lock nut | Brass | Gold plating |

■Ordering Information

HLS - JJ - 1
①
②
③





| |
|--|
| ① Series Name: HLS |
| ② Connector Coupling Portion JP: Jack/Plug JJ: Jack/Jack |
| ③ Suffix |

■Specifications

| Part Number | Frequency Range (GHz) | V.S.W.R. (Max) | Length of Travel (mm) | Power (W) | Weight (g) |
|-------------|-----------------------|----------------|-----------------------|-----------|------------|
| HLS-JP-3 | DC~4 4~8 | 1.20 1.25 | ※10 | 50 | 29 |
| HLS-JJ-1 | DC~4 4~8 | 1.20 1.25 | ※75 | 50 | 91 |
| HLS-JJ-11 | DC~4 4~10 | 1.20 1.35 | ※75 | 50 | 91 |
| HLS-JJ-13 | DC~4 4~10 | 1.20 1.35 | ※37.5 | 50 | 46 |


※With an air transmission path

External Dimensions

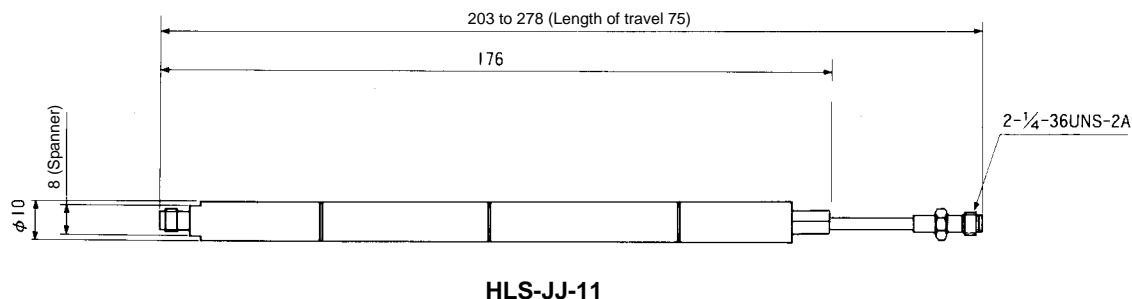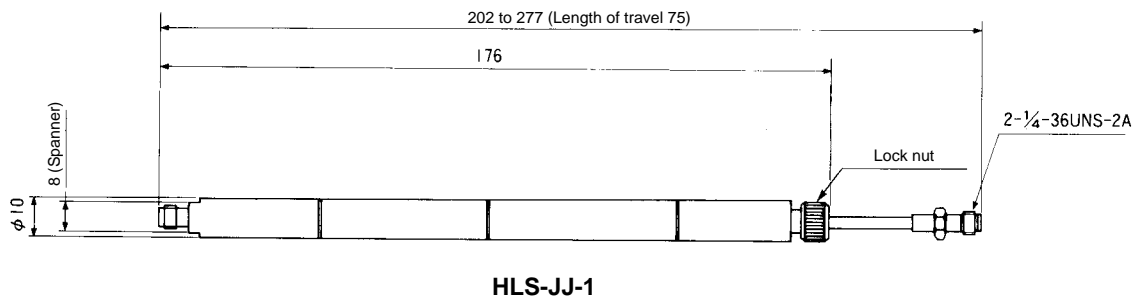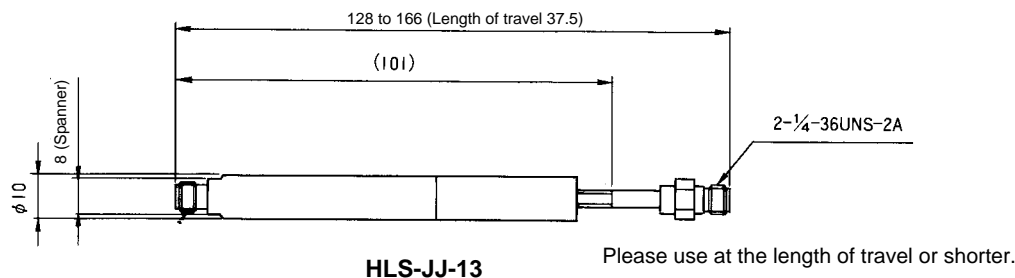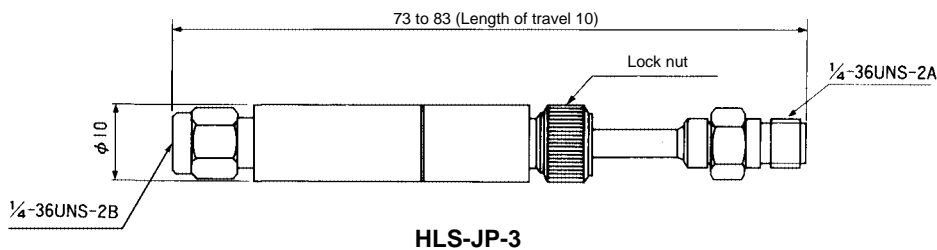


Typical Data

HLS-JJ-11

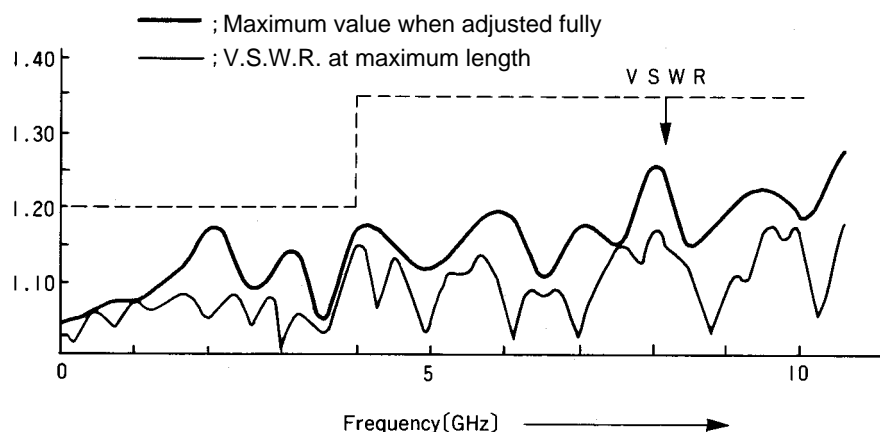

Coaxial Variable Phase Shifters

HLS Series

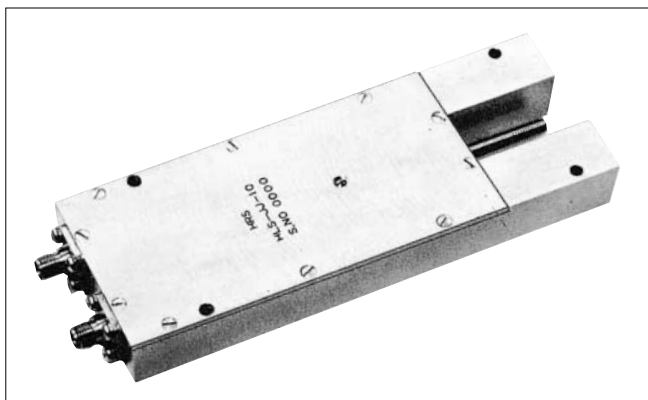

■Features

1.Adjustment Screw Variation Method

These coaxial phase shifters use a method in which the adjustment screw is varied to adjust the phase. Phase adjustments are thereby permitted without adjusting the overall length. The adjustment screw is of the lock type and once locked there will be no shift of phase.

2.48 mm Adjustable Length

The length of travel is 48 mm.

■Product Specifications

| | | | | |
|---------|--|----------------------------------|--|----------------------------|
| Ratings | Frequency range Characteristic impedance Maximum Input Power | DC to 4.0 GHz 50 ohms 50 W | Operating temperature range Operating relative humidity | -10°C to +65°C 95% Max. |
|---------|--|----------------------------------|--|----------------------------|

| Item | Standard | Conditions |
|--------------------------------|--|--|
| 1.Insulation | 1,000 M ohms min. | 500 V DC |
| 2.Vibration | No electrical discontinuity of 1 μ s or more | Frequency of 10 to 55 Hz, overall amplitude of 1.5 mm for 2 hours in each of 3 directions |
| 3.Shock | No damage, cracks, or parts dislocation | Acceleration of 98 m/s ² , sine half-wave waveform, 3 cycles in each of the 3 axis |
| 4.Temperature resistance cycle | No damage, cracks, or parts dislocation | Temperature: -30°C→+5°C to +35°C→+70°C→+5°C to +35°C Time: 30→15 max.→30→15 max. (Minutes) 5 cycles |

●The test method conforms to MIL-STD-202.

■Materials

| Part | Materials | Finish |
|------------------|------------------|----------------|
| Connector Body | Stainless steel | Passivated |
| Body | Aluminum | ----- |
| Female contact | Beryllium copper | Gold plating |
| Male contact | Beryllium copper | Gold plating |
| Insulator | PTFE | ----- |
| Adjustment screw | Brass | Nickel plating |

■Ordering Information

HLS - JJ - 10


① ② ③

| |
|---|
| ① Series Name: HLS |
| ② Connector Coupling Portion JJ: Jack/Jack |
| ③ Suffix |

■Specifications


| Part Number | Frequency Range (GHz) | V.S.W.R.(Max) | Insertion Loss (dB Max) | Length of travel (mm) | Power (W) | Weight (g) |
|-------------|-----------------------|-------------------|-------------------------|-------------------------------------|-----------|------------|
| HLS-JJ-10 | DC~1 1~2 2~4 | 1.2 1.3 1.5 | 0.3 0.4 0.5 | With an air transmission path 48 | 50 | 192 |

■External Dimensions

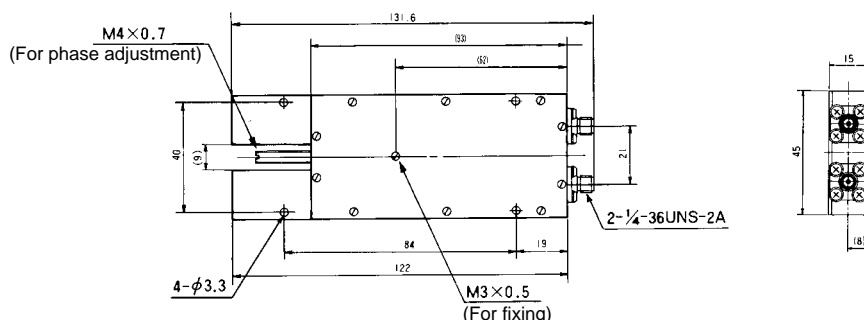

Coaxial Variable Phase Shifters

HLS Series

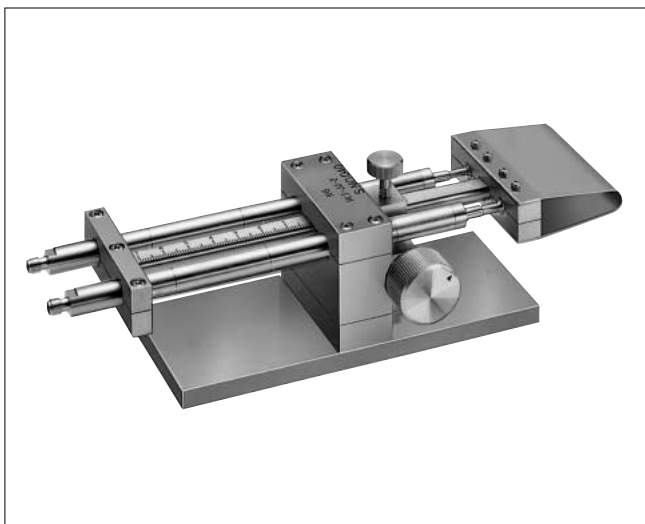

■Features

1.Adjustment Screw Variation Method

These coaxial phase shifters are adjusted by turning an adjustment screw which permits adjustment of the phase while maintaining an impedance of 50Ω.

The adjustment screw is of the lock type and once locked there will be no shift of phase.

2.140 mm Adjustable Length

The length of travel is 140 mm.

3.High Reliability

Stainless steel is used in the connector portion and the gold plating guarantees high reliability.

■Product Specifications

| Ratings | Frequency range Characteristic impedance Maximum Input Power | DC to 4.0 GHz 50 ohms 50W | Operating temperature range Operating relative humidity | -10℃ to +65℃ 95% Max. |
|---------|--|---------------------------------|--|--------------------------|
|---------|--|---------------------------------|--|--------------------------|

| Item | Standard | Conditions |
|--------------------------------|---|--|
| 1.Insulation | 1000 M ohms min. | 50 V DC |
| 2.Vibration | No electrical discontinuity of 1 μs or more | Frequency of 10 to 55 Hz, overall amplitude of 1.5 mm for 2 hours in each of 3 directions |
| 3.Shock | No damage, cracks, or parts dislocation | Acceleration of 98 m/s ² , sine half-wave waveform, 3 cycles in each of the 3 axis |
| 4.Temperature resistance cycle | No damage, cracks, or parts dislocation | Temperature: -30℃→+5℃ to +35℃→+70℃→+5℃ to +35℃ Time: 30→15 max.→30→15 max. (Minutes) 5 cycles |

●The test method conforms to MIL-STD-202.

■Materials

| Part | Material | Finish |
|----------------|------------------|----------------|
| Connector Body | Stainless steel | Gold plating |
| Body | Brass | Nickel plating |
| Female contact | Beryllium copper | Gold plating |
| Insulator | PTFE | ——— |

■Ordering Information

HLS - JJ - 2
① ② ③

① Series Name: HLS


② Connector Coupling Portion
JJ: Jack/Jack

③ Suffix

■Specifications

| Part Number | Frequency Range (GHz) | V.S.W.R. (Max) | Length of Travel (mm) | Power (W) | Weight (g) |
|-------------|-----------------------|----------------|--------------------------------------|-----------|------------|
| HLS-JJ-2 | DC~4 | 1.3 | With an air transmission path 140 | 50 | 2 |

■ External Dimensions

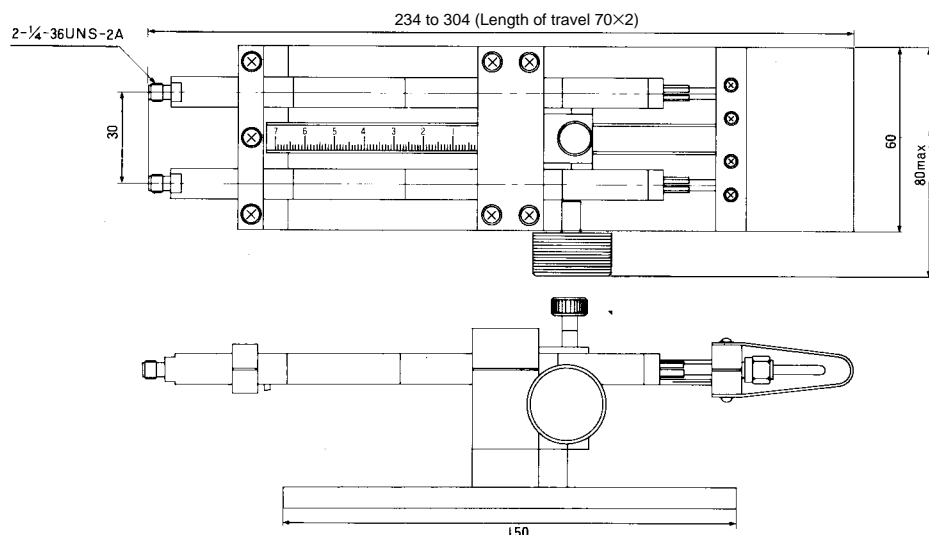

■ Relationship Between Shift Length, Delay Time, and Phase Angle

Shift Length L (mm), Delay Time T (ns), Frequency F (GHz), Phase Shift θ (deg)

$$T = \frac{L}{300}$$

$$\theta = 1.2 \times L \times F$$

