


BCR30GM

MEDIUM POWER USE
INSULATED TYPE, GLASS PASSIVATION TYPE


BCR30GM



- I_T (RMS) 30A
- V_{DRM} 400V/600V
- I_{FGT} I , I_{RGT} I , I_{RGT} III 50mA
- V_{iso} 2200V
- UL Recognized: File No. E80276

OUTLINE DRAWING

Dimensions
in mm

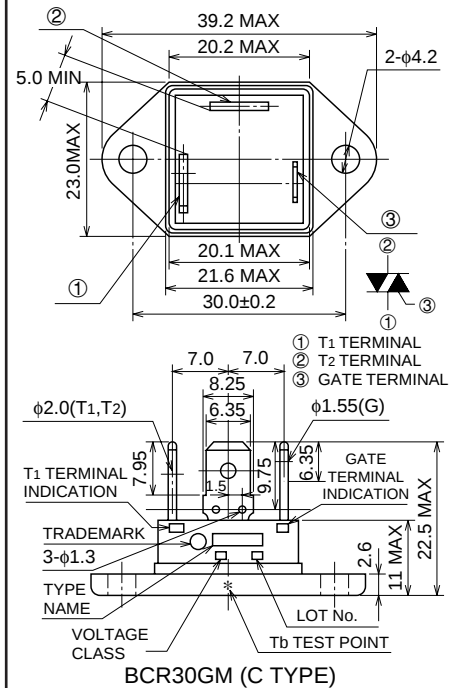

APPLICATION

Contactless AC switches, light dimmer,
on/off and speed control of small induction motors, on/off control of copier lamps,
microwave ovens

MAXIMUM RATINGS

Symbol	Parameter	Voltage class		Unit
		8	12	
V_{DRM}	Repetitive peak off-state voltage *1	400	600	V
V_{DSM}	Non-repetitive peak off-state voltage *1	500	720	V

Symbol	Parameter	Conditions	Ratings	Unit
I_T (RMS)	RMS on-state current	Commercial frequency, sine full wave 360° conduction, $T_b=60^\circ\text{C}$	30	A
I_{TSM}	Surge on-state current	60Hz sinewave 1 full cycle, peak value, non-repetitive	300	A
I^2_t	I^2_t for fusing	Value corresponding to 1 cycle of half wave 60Hz, surge on-state current	375	A ² s
PGM	Peak gate power dissipation		5	W
PG (AV)	Average gate power dissipation		0.5	W
VGM	Peak gate voltage		10	V
IGM	Peak gate current		2	A
T_j	Junction temperature		-40 ~ +125	°C
T_{stg}	Storage temperature		-40 ~ +125	°C
—	Mounting torque	Screw M4	15 1.47	kg·cm N·cm
—	Weight	Typical value	26	g
V_{iso}	Isolation voltage	$T_a=25^\circ\text{C}$, AC 1 minute, $T_2 \cdot T_1 \cdot G$ terminal to base	2200	V

*1. Gate open.

BCR30GM

MEDIUM POWER USE
INSULATED TYPE, GLASS PASSIVATION TYPE

ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
IDRM	Repetitive peak off-state current	T _J =125°C, V _{DRM} applied	—	—	3.0	mA
VTM	On-state voltage	T _b =25°C, I _{TM} =45A, Instantaneous measurement	—	—	1.6	V
VFGT I	Gate trigger voltage *2	T _J =25°C, V _D =6V, R _L =6Ω, R _G =330Ω	—	—	2.5	V
VRGT I			—	—	2.5	V
VRGT III			—	—	2.5	V
IFGT I	Gate trigger current *2	T _J =25°C, V _D =6V, R _L =6Ω, R _G =330Ω	—	—	50	mA
IRGT I			—	—	50	mA
IRGT III			—	—	50	mA
VGD	Gate non-trigger voltage	T _J =125°C, V _D =1/2V _{DRM}	0.2	—	—	V
R _{th} (j-b)	Thermal resistance	Junction to base *4	—	—	1.6	°C/W
(dv/dt) _c	Critical-rate of rise of off-state commutating voltage		*3	—	—	V/μs



*2. Measurement using the gate trigger characteristics measurement circuit.

*3. The critical-rate of rise of the off-state commutating voltage is shown in the table below.

*4. The contact thermal resistance R_{th} (b-f) in case of greasing is 0.5°C/W.







Voltage class	V _{DRM} (V)	(dv/dt) _c			Test conditions	Commutating voltage and current waveforms (inductive load)
		Symbol	Min.	Unit		
8	400	R	—	V/μs	1. Junction temperature T _J =125°C 2. Rate of decay of on-state commutating current (di/dt) _c =-16A/ms 3. Peak off-state voltage V _D =400V	
		L	20			
12	600	R	—			
		L	20			

PERFORMANCE CURVES

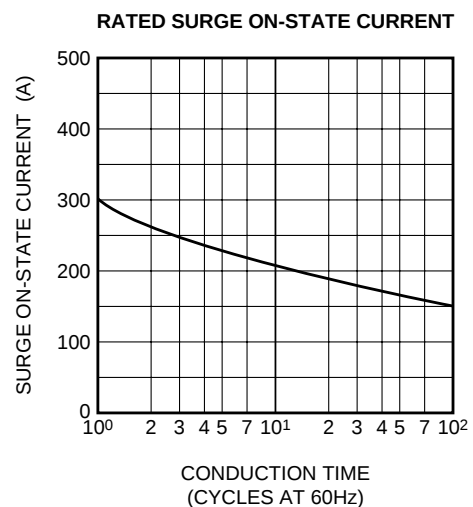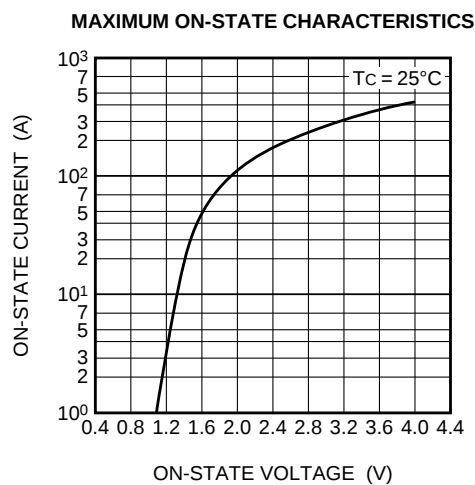

BCR30GM


MEDIUM POWER USE
INSULATED TYPE, GLASS PASSIVATION TYPE

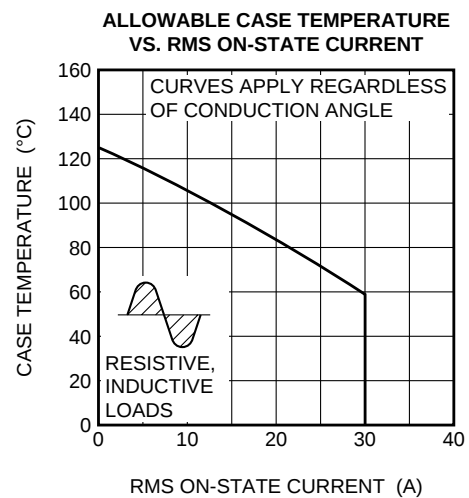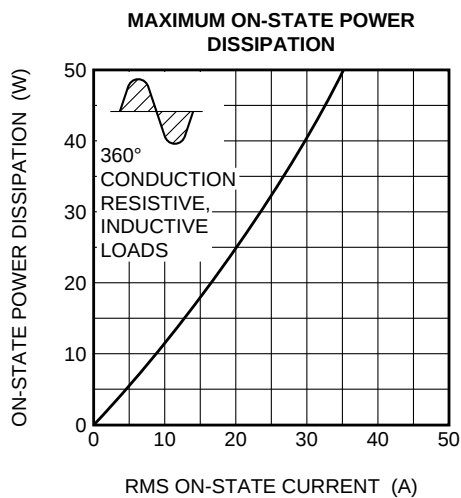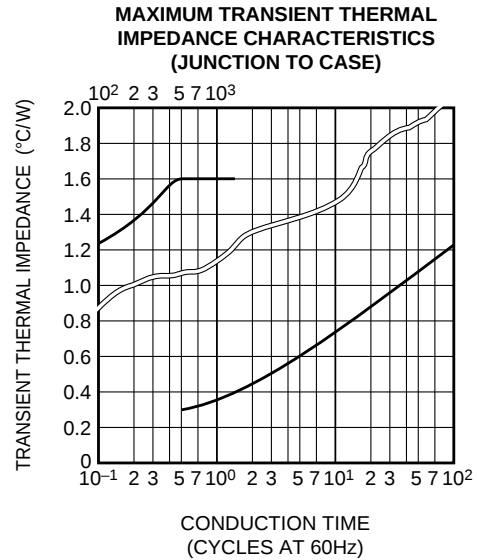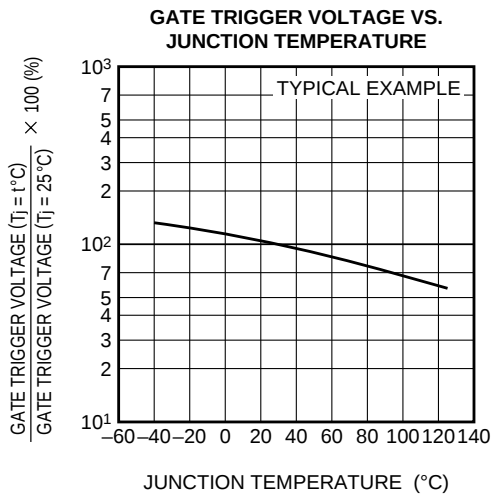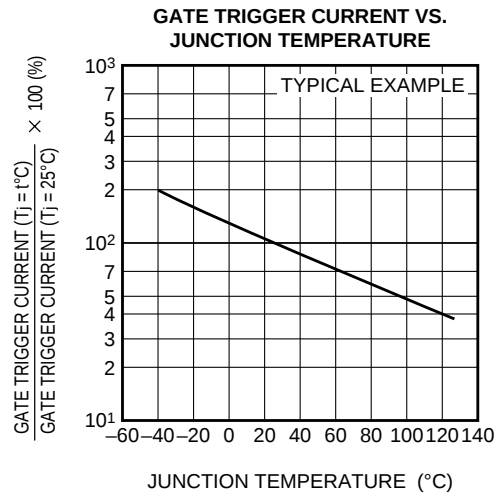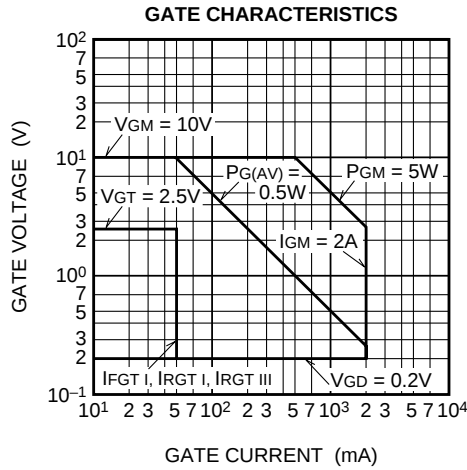


BCR30GM

MEDIUM POWER USE
INSULATED TYPE, GLASS PASSIVATION TYPE


ALLOWABLE AMBIENT TEMPERATURE
VS. RMS ON-STATE CURRENT

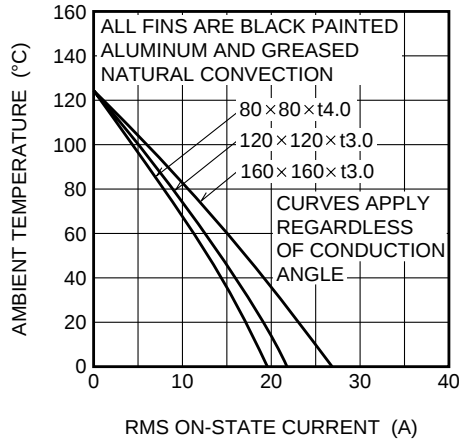


REPETITIVE PEAK OFF-STATE
CURRENT VS. JUNCTION
TEMPERATURE

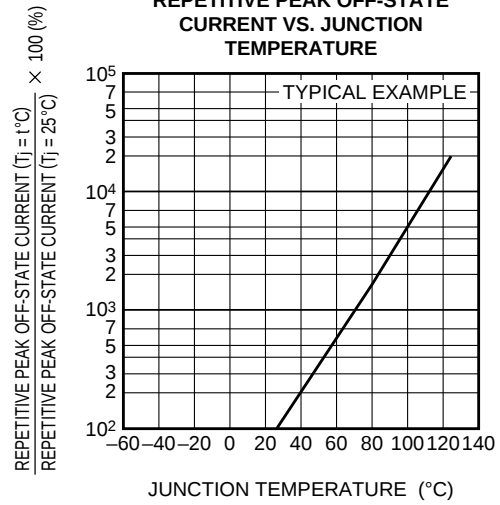


HOLDING CURRENT VS.
JUNCTION TEMPERATURE

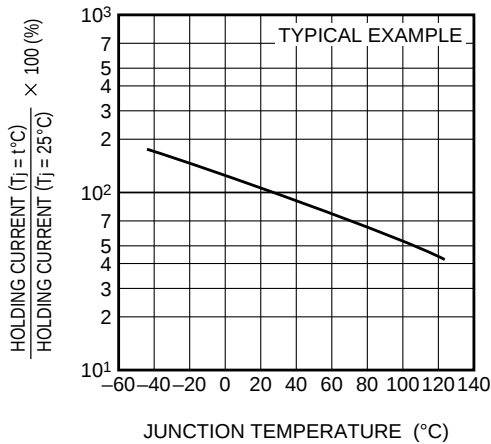


BREAKOVER VOLTAGE VS.
JUNCTION TEMPERATURE

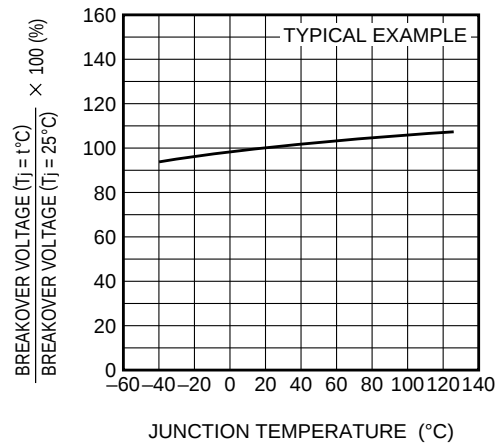

BREAKOVER VOLTAGE VS.
RATE OF RISE OF
OFF-STATE VOLTAGE

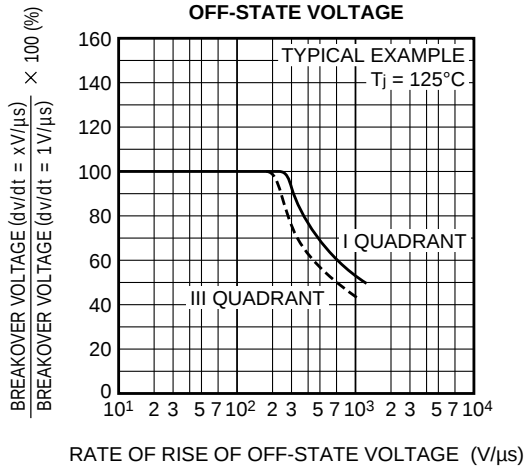


COMMUTATION CHARACTERISTICS

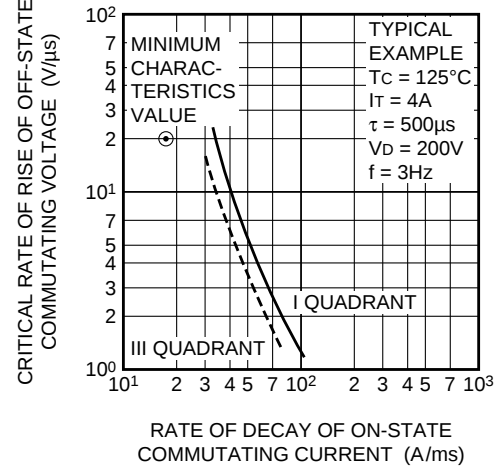

BCR30GM

MEDIUM POWER USE
INSULATED TYPE, GLASS PASSIVATION TYPE

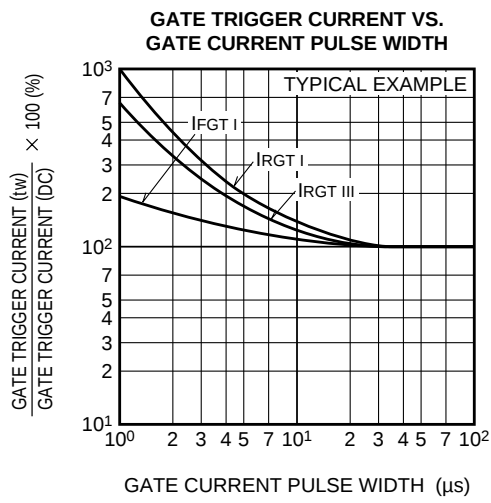

GATE TRIGGER CHARACTERISTICS TEST CIRCUITS

