

To our customers,

Old Company Name in Catalogs and Other Documents

On April 1st, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: <http://www.renesas.com>

April 1st, 2010
Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (<http://www.renesas.com>)

Send any inquiries to <http://www.renesas.com/inquiry>.

Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: “Standard”, “High Quality”, and “Specific”. The recommended applications for each Renesas Electronics product depends on the product’s quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as “Specific” without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as “Specific” or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is “Standard” unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.
 - “Standard”: Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.
 - “High Quality”: Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.
 - “Specific”: Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) “Renesas Electronics” as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) “Renesas Electronics product(s)” means any product developed or manufactured by or for Renesas Electronics.

HIGH-FREQUENCY LOW NOISE AMPLIFIER NPN SILICON EPITAXIAL TRANSISTOR (WITH BUILT-IN 6-PIN 2 ELEMENTS) MINI MOLD

The μ PA801T has built-in 2 low-voltage transistors which are designed to amplify low noise in the VHF band to the UHF band.

FEATURES

- Low Noise
NF = 1.2 dB TYP. @ $f = 1$ GHz, $V_{CE} = 3$ V, $I_C = 7$ mA
- High Gain
 $|S_{21e}|^2 = 9.0$ dB TYP. @ $f = 1$ GHz, $V_{CE} = 3$ V, $I_C = 7$ mA
- A Mini Mold Package Adopted
- Built-in 2 Transistors ($2 \times 2SC4226$)

ORDERING INFORMATION

PART NUMBER	QUANTITY	PACKING STYLE
μ PA801T	Loose products (50 PCS)	Embossed tape 8 mm wide. Pin 6 (Q1 Base), Pin 5 (Q2 Base), Pin 4 (Q2 Emitter) face to perforation side of the tape.
μ PA801T-T1	Taping products (3 KPCS/Reel)	

Remark If you require an evaluation sample, please contact an NEC Sales Representative. (Unit sample quantity is 50 pcs.)


ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$)

PARAMETER	SYMBOL	RATING	UNIT
Collector to Base Voltage	V_{CBO}	20	V
Collector to Emitter Voltage	V_{CEO}	12	V
Emitter to Base Voltage	V_{EBO}	3	V
Collector Current	I_C	100	mA
Total Power Dissipation	P_T	150 in 1 element 200 in 2 elements ^{Note}	mW
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-65 to +150	$^\circ\text{C}$


Note 110 mW must not be exceeded in 1 element.

PACKAGE DRAWINGS

(Unit: mm)

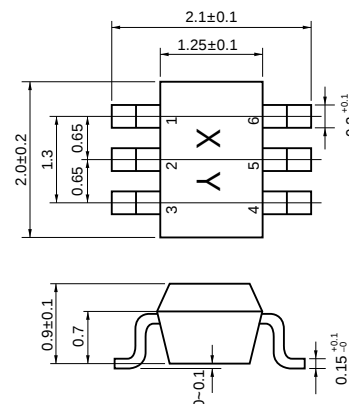

PIN CONFIGURATION (Top View)



PIN CONNECTIONS

- | | |
|-------------------|-----------------|
| 1. Collector (Q1) | 4. Emitter (Q2) |
| 2. Emitter (Q1) | 5. Base (Q2) |
| 3. Collector (Q2) | 6. Base (Q1) |

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$)





PARAMETER	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cutoff Current	I_{CBO}	$V_{CB} = 10\text{ V}, I_E = 0$			1	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 1\text{ V}, I_C = 0$			1	μA
DC Current Gain	h_{FE}	$V_{CE} = 3\text{ V}, I_C = 7\text{ mA}$ Note 1	70		250	
Gain Bandwidth Product	f_T	$V_{CE} = 3\text{ V}, I_C = 7\text{ mA}$	3.0	4.5		GHz
Feed-back Capacitance	C_{re}	$V_{CB} = 3\text{ V}, I_E = 0, f = 1\text{ MHz}$ Note 2		0.7	1.5	pF
Insertion Power Gain	$ S_{21} ^2$	$V_{CE} = 3\text{ V}, I_C = 7\text{ mA}, f = 1\text{ GHz}$	7	9		dB
Noise Figure	NF	$V_{CE} = 3\text{ V}, I_C = 7\text{ mA}, f = 1\text{ GHz}$		1.2	2.5	dB
h_{FE} Ratio	h_{FE1}/h_{FE2}	$V_{CE} = 3\text{ V}, I_C = 7\text{ mA}$ A smaller value among h_{FE} of $h_{FE1} = Q1, Q2$ A larger value among h_{FE} of $h_{FE2} = Q1, Q2$	0.85			






Notes 1. Pulse Measurement: $P_w \leq 350\text{ }\mu\text{s}$, Duty cycle $\leq 2\%$

2. Measured with 3-pin bridge, emitter and case should be connected to guard pin of bridge.

 h_{FE} CLASSIFICATION

Rank	FB	GB
Marking	R24	R25
h_{FE} Value	70 to 140	125 to 250

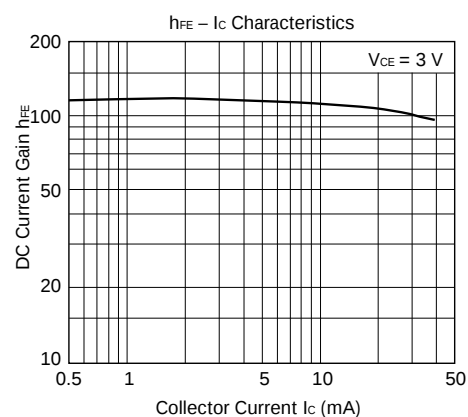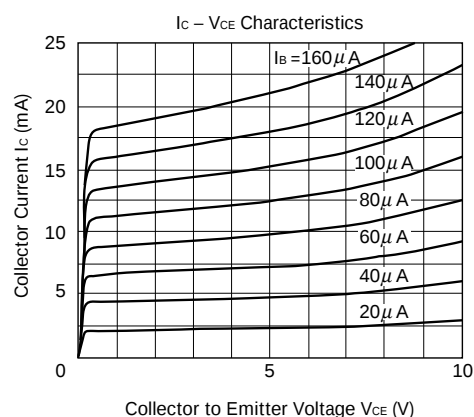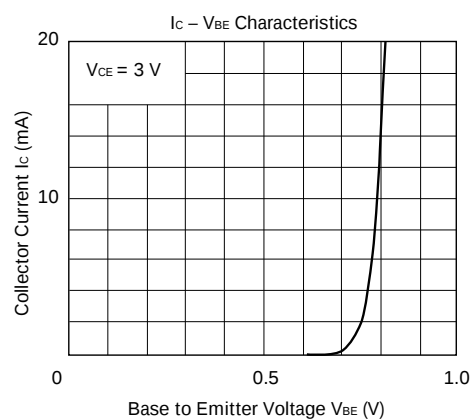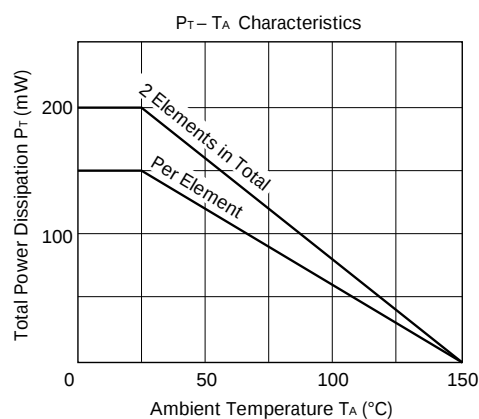TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$)

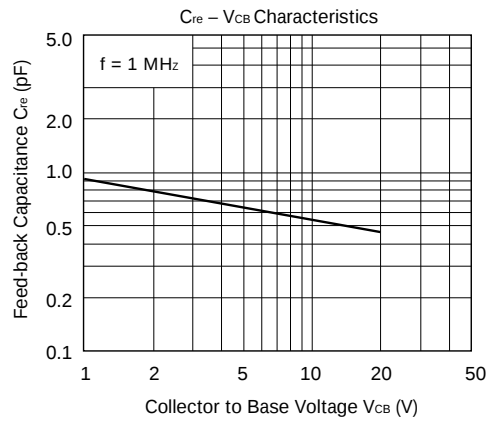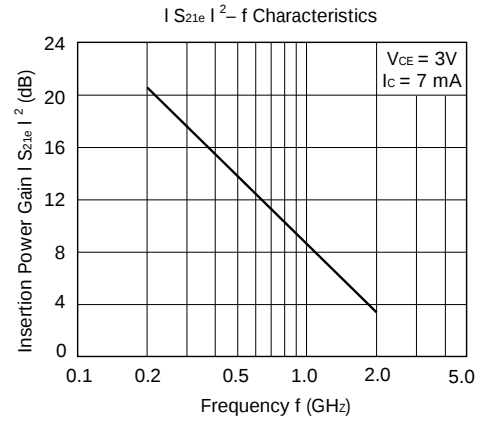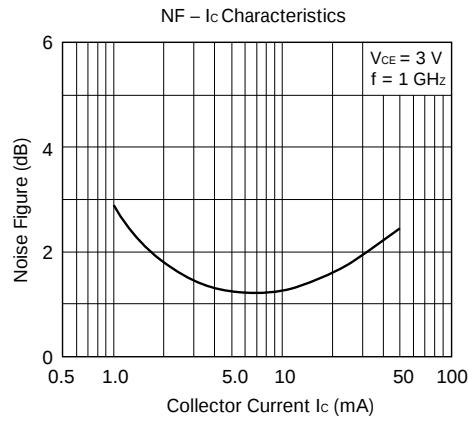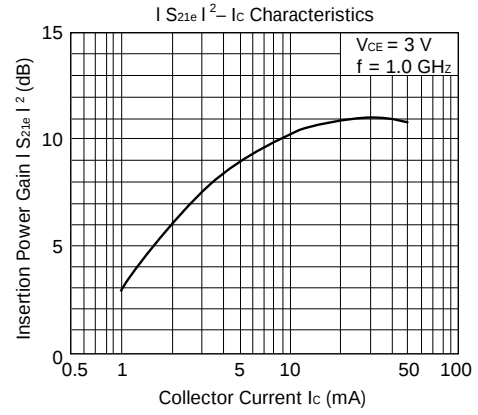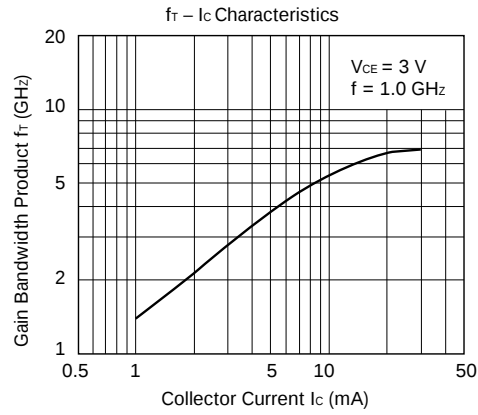

S-PARAMETERS $V_{CE} = 3 \text{ V}$, $I_C = 7 \text{ mA}$, $Z_O = 50 \Omega$

FREQUENCY	S11		S21		S12		S22		
	MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100.00	.750		-45.7	11.858	144.0	.035	63.3	.816	-28.5
200.00	.618		-84.9	10.093	122.3	.053	53.2	.609	-41.8
300.00	.528		-114.5	8.219	107.7	.064	50.6	.481	-46.7
400.00	.483		-134.3	6.684	97.9	.073	50.6	.411	-49.1
500.00	.459		-148.5	5.565	90.5	.081	50.7	.365	-50.5
600.00	.447		-158.8	4.737	84.6	.089	52.3	.337	-51.5
700.00	.441		-167.4	4.134	79.7	.098	53.5	.316	-52.6
800.00	.439		-174.4	3.653	75.2	.107	54.2	.300	-54.2
900.00	.437		179.2	3.283	71.1	.117	54.9	.290	-55.9
1000.00	.437		173.7	2.978	67.2	.126	55.6	.281	-57.9
1100.00	.440		168.6	2.732	63.7	.136	55.8	.275	-59.6
1200.00	.443		163.9	2.533	60.0	.147	55.3	.270	-62.3
1300.00	.444		159.6	2.357	56.6	.158	55.4	.267	-64.7
1400.00	.449		155.5	2.216	53.4	.169	55.3	.264	-67.5
1500.00	.450		151.6	2.077	50.3	.180	54.7	.259	-70.6
1600.00	.455		147.9	1.972	47.4	.192	54.5	.258	-73.3
1700.00	.459		144.3	1.868	44.3	.202	53.9	.256	-76.3
1800.00	.462		140.9	1.789	41.3	.214	53.0	.255	-79.6
1900.00	.466		137.5	1.702	38.4	.226	52.3	.253	-83.0
2000.00	.470		134.4	1.635	36.1	.238	51.5	.253	-86.4

 $V_{CE} = 3 \text{ V}$, $I_C = 5 \text{ mA}$, $Z_O = 50 \Omega$

FREQUENCY	S11		S21		S12		S22		
	MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100.00	.819		-38.9	8.934	148.0	.038	65.8	.868	-23.6
200.00	.701		-73.4	8.007	127.6	.060	53.1	.687	-36.7
300.00	.608		-102.3	6.898	112.6	.072	47.6	.560	-42.4
400.00	.549		-123.6	5.819	101.8	.079	45.2	.483	-45.4
500.00	.511		-139.6	4.970	93.5	.086	45.7	.434	-47.2
600.00	.494		-151.0	4.255	86.9	.093	46.5	.402	-48.6
700.00	.481		-160.8	3.750	81.4	.099	47.2	.379	-49.9
800.00	.475		-168.6	3.328	76.3	.107	48.9	.361	-51.5
900.00	.472		-175.7	3.004	72.0	.113	49.7	.350	-53.4
1000.00	.471		178.2	2.734	67.7	.122	50.9	.340	-55.4
1100.00	.473		172.8	2.522	64.0	.130	51.6	.332	-57.3
1200.00	.474		167.6	2.355	60.2	.139	52.3	.328	-59.7
1300.00	.474		162.9	2.176	56.7	.148	53.1	.322	-62.3
1400.00	.477		158.4	2.038	53.2	.158	53.3	.319	-65.2
1500.00	.481		154.4	1.921	49.8	.168	53.7	.315	-68.2
1600.00	.484		150.3	1.818	46.7	.177	53.3	.313	-70.9
1700.00	.489		146.5	1.726	43.9	.190	53.3	.312	-73.9
1800.00	.490		142.9	1.647	40.6	.200	53.0	.312	-77.2
1900.00	.495		139.3	1.578	37.6	.212	52.7	.309	-80.8
2000.00	.501		136.0	1.505	35.0	.223	52.0	.309	-84.0

S-PARAMETERS $V_{CE} = 3 \text{ V}$, $I_C = 3 \text{ mA}$, $Z_O = 50 \Omega$

FREQUENCY	S11		S21		S12		S22		
	MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100.00	.899		-30.6	5.578	153.7	.042	69.0	.923	-17.3
200.00	.808		-60.6	5.327	134.4	.069	54.5	.793	-29.2
300.00	.723		-86.7	4.877	119.6	.084	46.0	.679	-35.4
400.00	.660		-108.2	4.341	108.1	.093	41.1	.604	-39.5
500.00	.610		-125.9	3.883	98.5	.098	38.8	.550	-42.0
600.00	.583		-138.6	3.388	90.9	.102	37.4	.513	-44.2
700.00	.560		-150.0	3.046	84.3	.106	37.8	.487	-45.9
800.00	.547		-159.4	2.741	78.5	.108	38.1	.468	-47.9
900.00	.538		-167.4	2.498	73.4	.112	39.5	.455	-49.9
1000.00	.535		-174.4	2.287	68.9	.116	41.0	.444	-52.3
1100.00	.534		179.3	2.111	64.6	.120	43.0	.435	-54.7
1200.00	.533		173.4	1.965	60.2	.125	45.1	.429	-57.2
1300.00	.533		168.3	1.830	56.3	.131	46.7	.424	-59.9
1400.00	.534		163.2	1.721	52.7	.139	48.3	.422	-62.8
1500.00	.538		158.7	1.620	49.2	.146	49.8	.417	-65.7
1600.00	.542		154.3	1.544	45.7	.155	51.3	.414	-68.8
1700.00	.545		150.0	1.464	42.7	.164	52.4	.415	-72.0
1800.00	.548		146.1	1.396	39.5	.174	53.0	.412	-75.3
1900.00	.552		142.0	1.336	36.6	.187	53.7	.411	-78.8
2000.00	.556		138.3	1.280	33.6	.199	54.1	.411	-82.3

 $V_{CE} = 3 \text{ V}$, $I_C = 1 \text{ mA}$, $Z_O = 50 \Omega$

FREQUENCY	S11		S21		S12		S22		
	MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100.00	.967		-22.9	1.935	159.9	.045	74.0	.978	-9.2
200.00	.930		-45.8	1.968	143.1	.083	60.1	.931	-17.4
300.00	.884		-67.1	1.938	129.1	.108	48.9	.870	-23.2
400.00	.842		-85.9	1.827	117.2	.125	39.4	.822	-28.0
500.00	.801		-103.1	1.748	106.7	.134	32.6	.779	-31.9
600.00	.771		-117.0	1.576	97.4	.137	27.1	.749	-35.3
700.00	.742		-130.0	1.498	89.2	.137	22.9	.722	-38.4
800.00	.722		-141.2	1.403	81.9	.134	20.0	.702	-41.3
900.00	.706		-151.1	1.326	75.6	.129	18.5	.690	-44.4
1000.00	.695		-159.9	1.242	69.6	.124	17.8	.680	-47.4
1100.00	.689		-167.7	1.169	64.5	.118	18.1	.671	-50.4
1200.00	.685		-174.9	1.102	59.6	.112	19.8	.666	-53.6
1300.00	.681		178.7	1.030	55.3	.106	23.5	.660	-56.9
1400.00	.681		172.6	.979	50.9	.103	28.0	.658	-60.4
1500.00	.683		166.8	.925	47.2	.100	33.6	.654	-64.0
1600.00	.684		161.4	.884	43.6	.102	40.4	.651	-67.6
1700.00	.684		156.1	.842	40.4	.107	47.5	.651	-71.5
1800.00	.686		151.4	.804	37.3	.115	53.5	.649	-75.1
1900.00	.689		146.6	.773	34.6	.127	57.9	.646	-79.2
2000.00	.690		142.1	.738	32.3	.141	62.1	.646	-83.0

[MEMO]

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customer must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.

NEC devices are classified into the following three quality grades:

“Standard”, “Special”, and “Specific”. The Specific quality grade applies only to devices developed based on a customer designated “quality assurance program” for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC devices in “Standard” unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact NEC Sales Representative in advance.

Anti-radioactive design is not implemented in this product.