

SGP.12a

Specification

Part No.	SGP.1575.12.4.A.02
Product Name	GPS SMT Patch Antenna
Features	12mm*12mm*4.5mm 1575MHz Centre Frequency Patent Pending RoHS Compliant

1. Introduction

This ceramic GPS patch antenna is based on smart **XtremeGain™** technology. It is mounted via SMT process and has been selected as optimal solution for the 45x45mm ground plane.

2. Specification


Original Patch Specification tested on 45mm ground plane

Parameter	Specification	Notes
Range of Receiving Frequency	1575.42 ± 1.023MHz	
Center Frequency	1575.42 ± 3MHz	With 45*45mm ground plane
Bandwidth	4MHz min	Return Loss ≤-10 dB
Return Loss	≤-10 dB	
VSWR	1.5 max	
Gain at Zenith	- 1.0 dBic typ.	
Gain at 10° elevation	- 1.5 dBic typ.	
Axial Ratio	4.0 dB max	
Polarization	RHCP	
Impedance	50 Ohms	
Frequency Temperature Coefficient (τf)	0 ± 20ppm / °C	-40°C to +85°C
Operating Temperature	-40°C to +85°C	

****Changes in user groundplane and environment will offset centre frequency**


3. Electrical Specifications

3.1 Return Loss, SWR, Impedance, measured on the test fixture

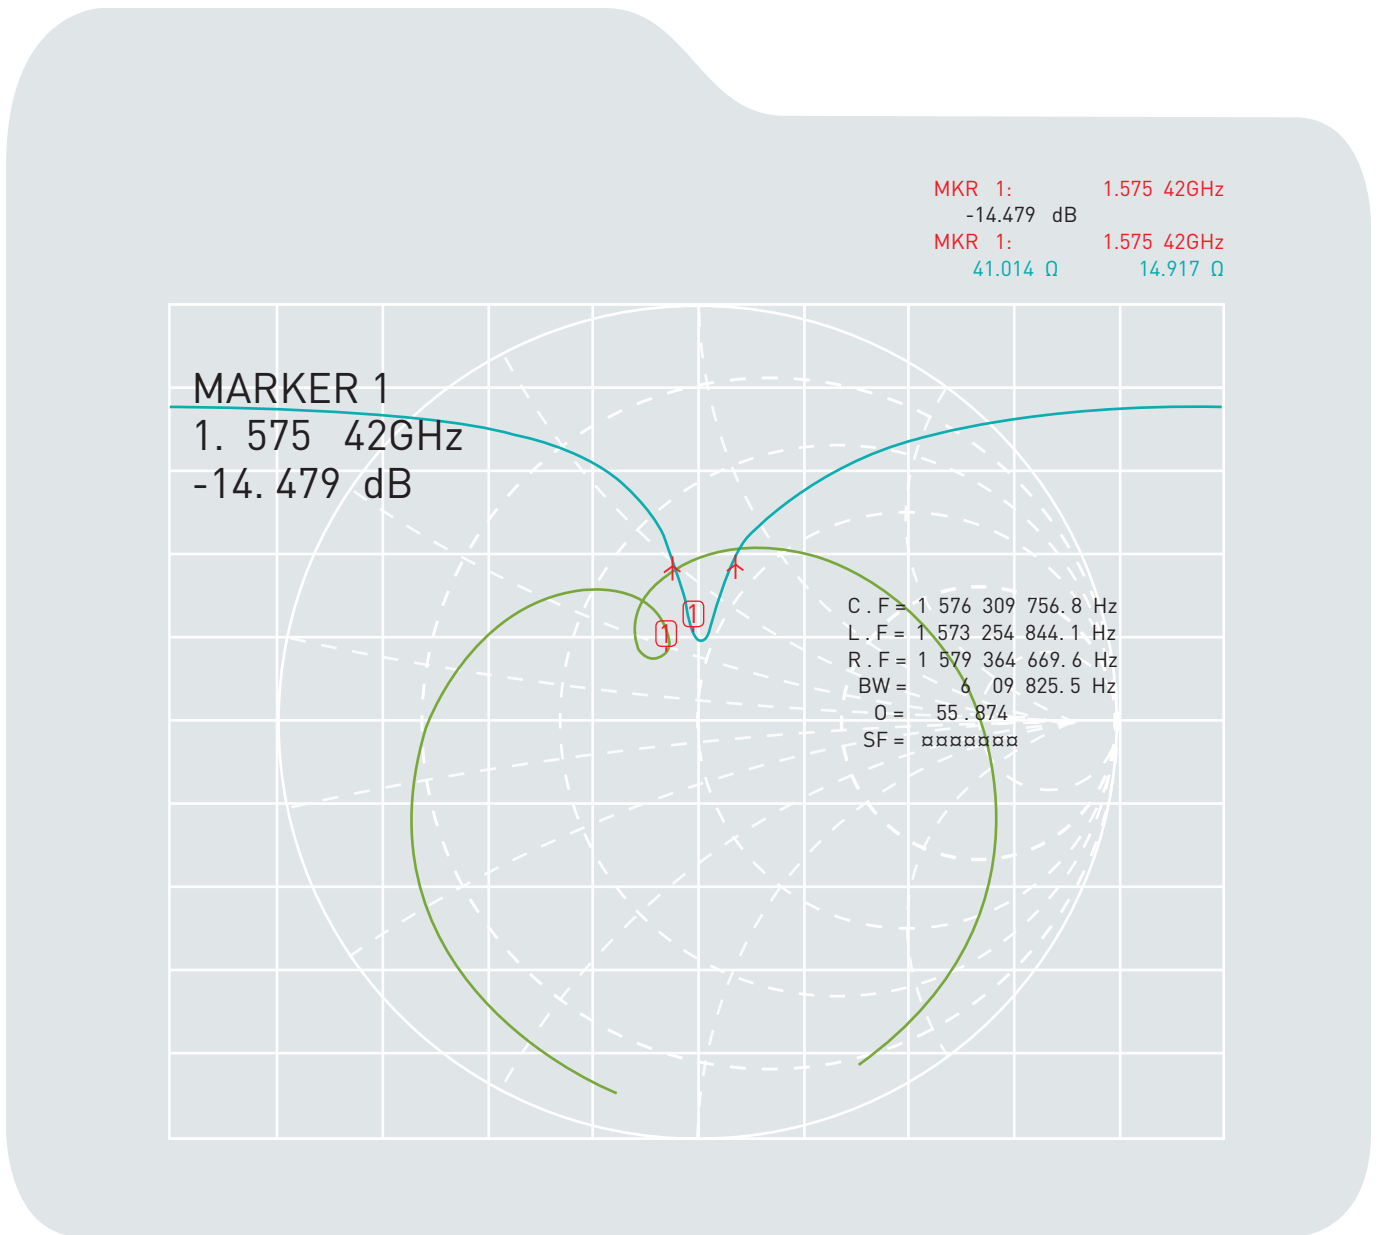


4. Mechanical Specifications

4.1 Dimensions and Drawing

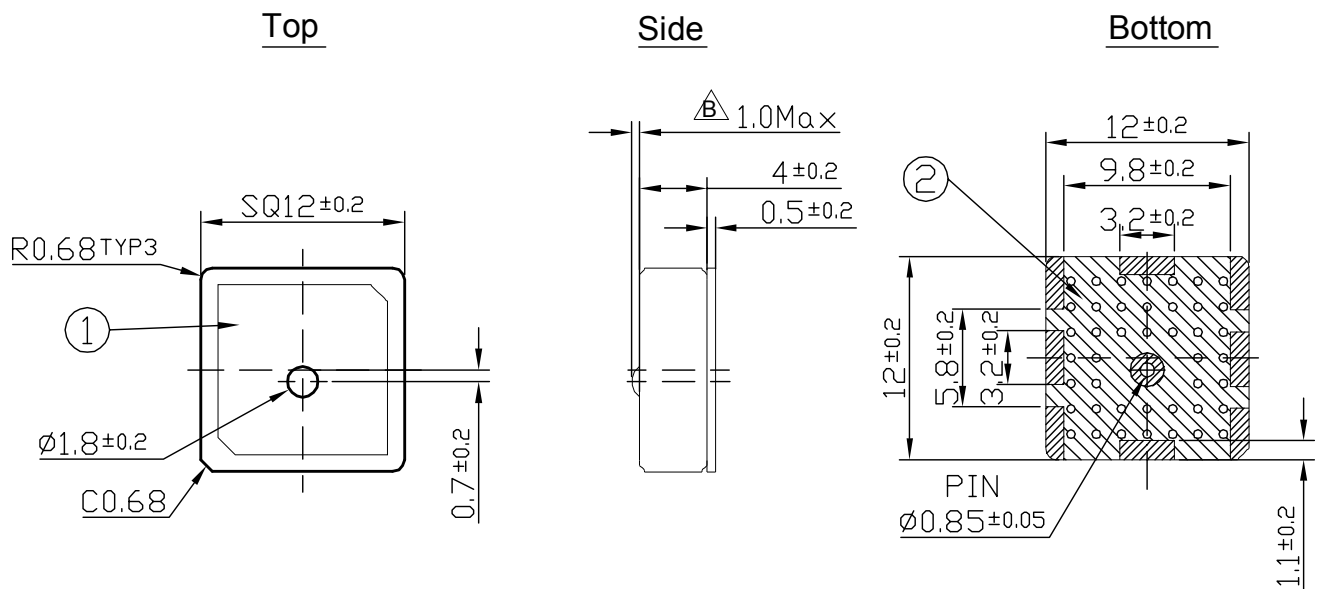


	Name	Part No.	Material	Finish	Quantity
1	SGP.12 Patch 12x12x4	SGP.12	Ceramic	Clear	1
2	SGP.12 PCB		FR 0.5t	Green	1

4.2 Antenna footprint


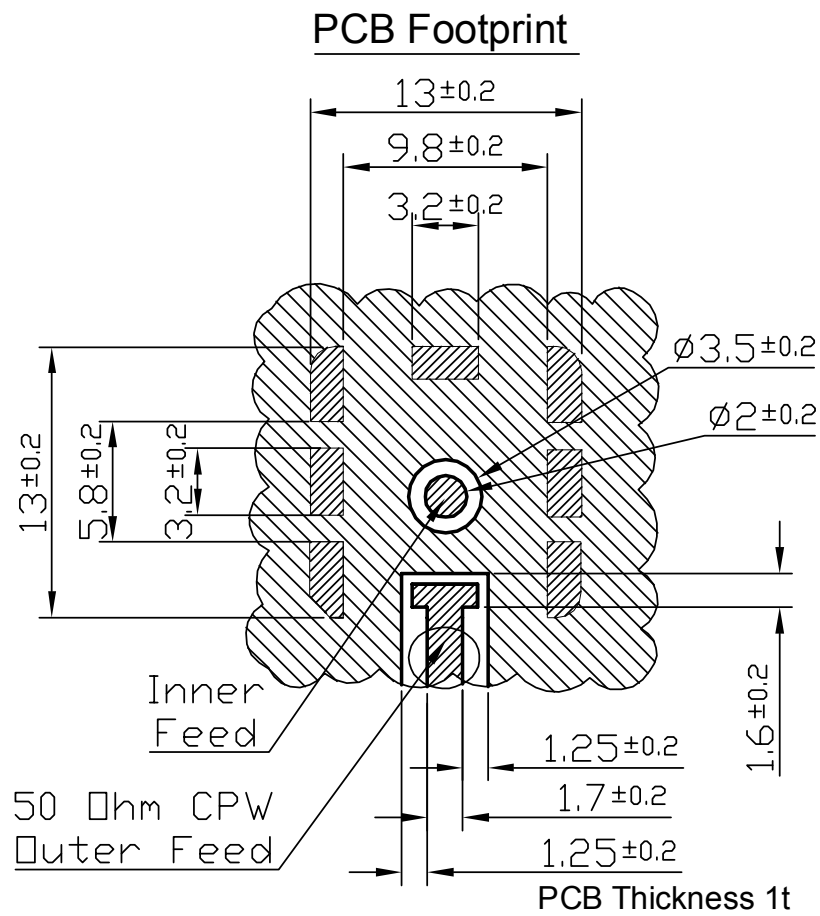


NOTE:

1. Solder mask.
2. Area to be soldered.
3. Clearance area.
4. Dimension of 50 Ohm CPW dependent on individual board.
5. Must be soldered to complete antenna feed connection.




4.3 Test Jig and Dimension


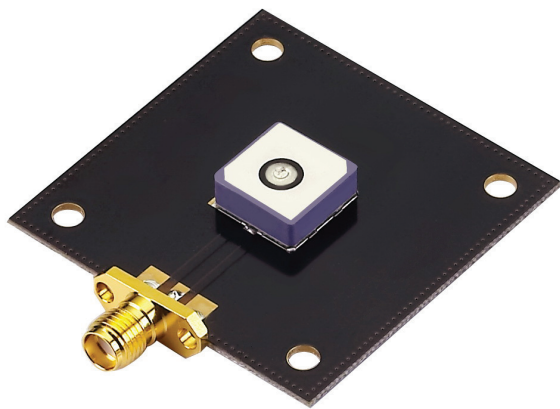
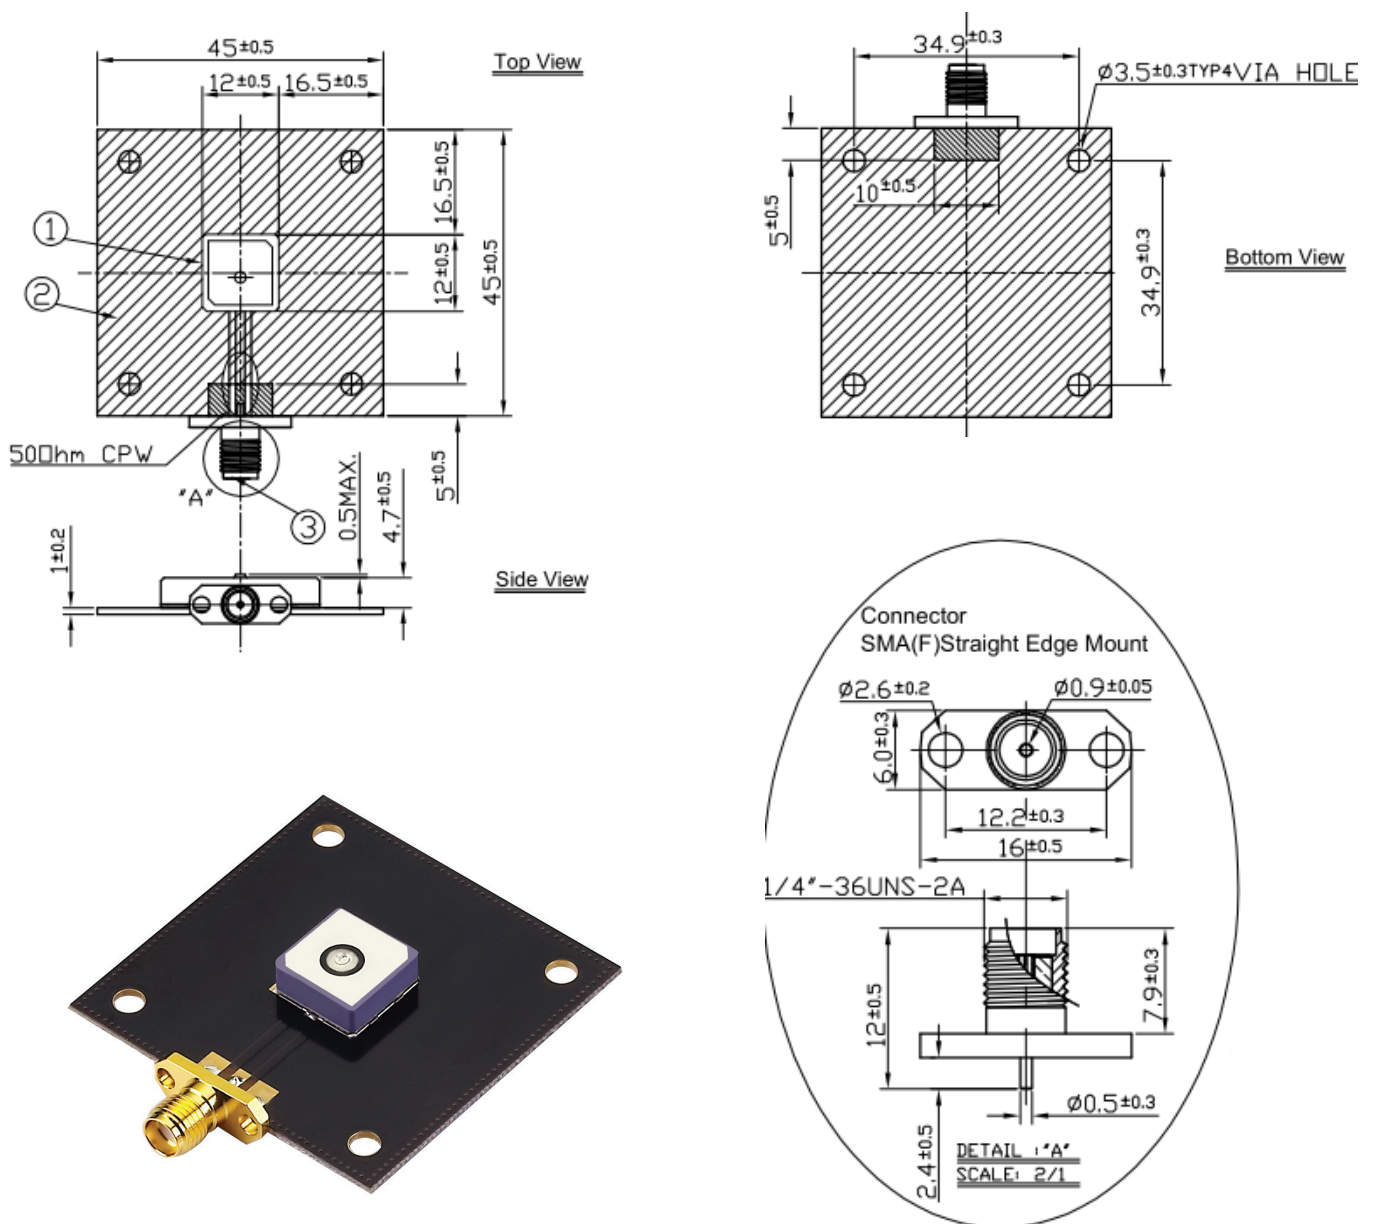


4.4 Test Fixture set up and measurements

Test Fixture

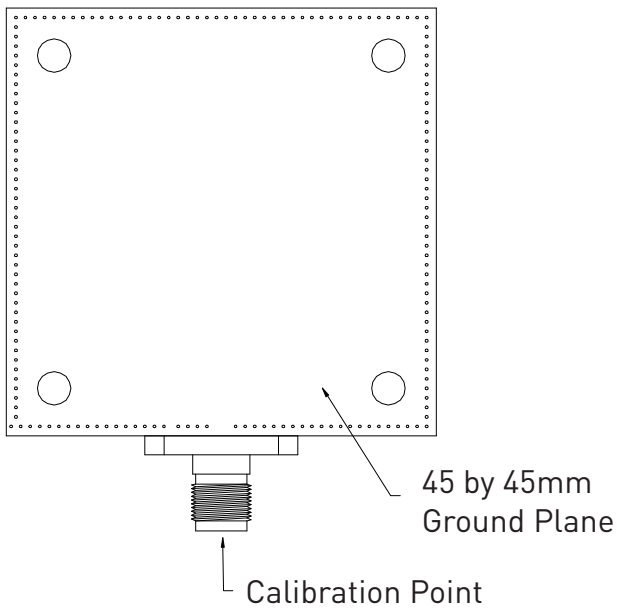

Antenna Setup
& Measurements

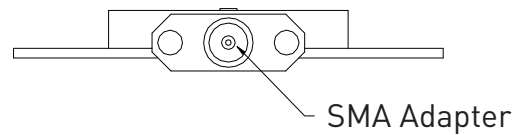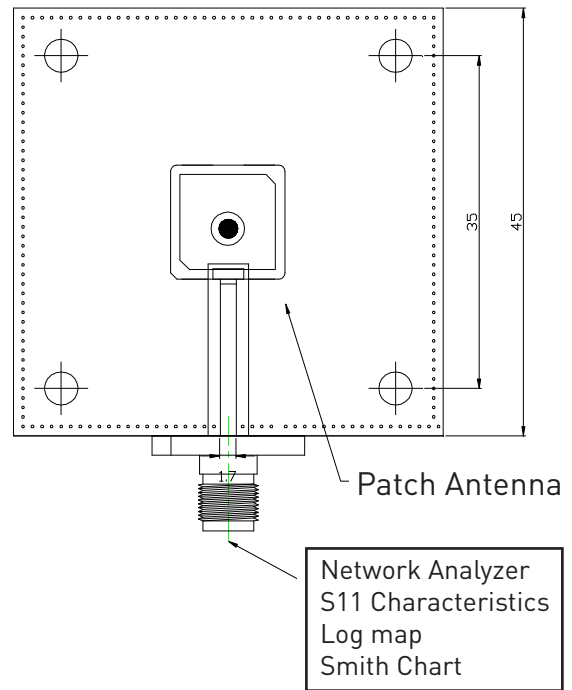


5. Antenna Recommended Soldering Conditions

5.1 Flux, Solder

- Use rosin-based flux. Don't use highly acidic flux with halide content exceeding 0.2wt%(chlorine conversion value).
- Use Sn solder.

5.2 Reflow Soldering Conditions

- Pre-heating should be in such a way that the temperature difference between solder and product surface is limited to 150°C max. Cooling into solvent after soldering also should be in such a way that temperature difference is limited to 100°C max. Unwrought pre-heating may cause cracks on the product, resulting in the deterioration of products quality.

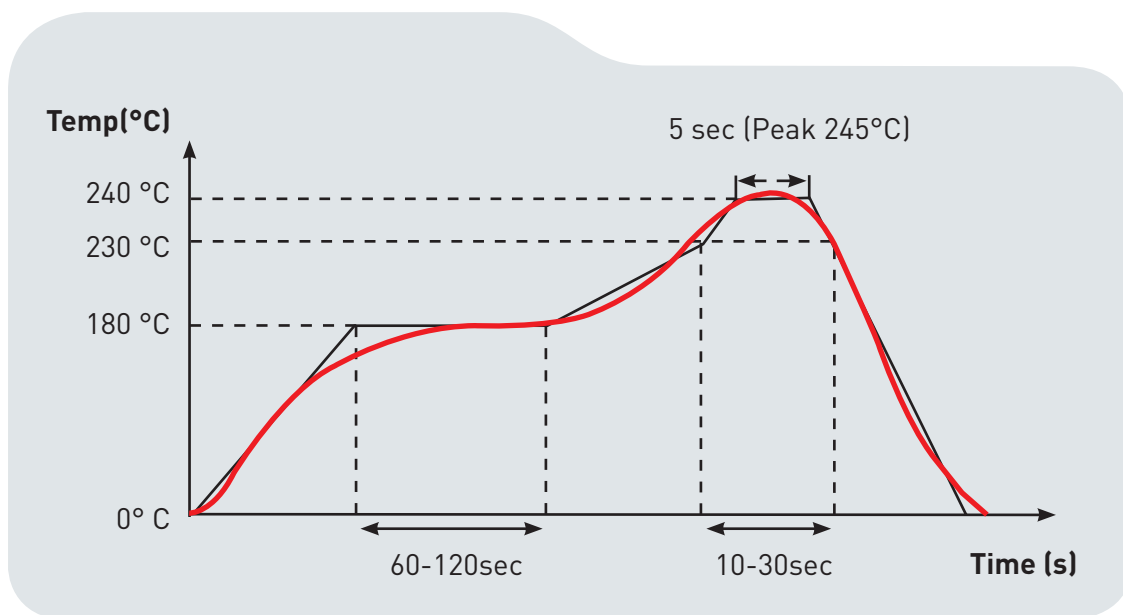



5.3 Reflow with Soldering Iron

- The following conditions must be strictly followed when using a soldering iron.

Pre-heating	150°, 1 min
Tip temperature	290° max
Soldering iron output	30w max
Soldering time	3 second max

6. Packaging

500 pcs / reel / inner carton
5 reels in an outer carton (2500)

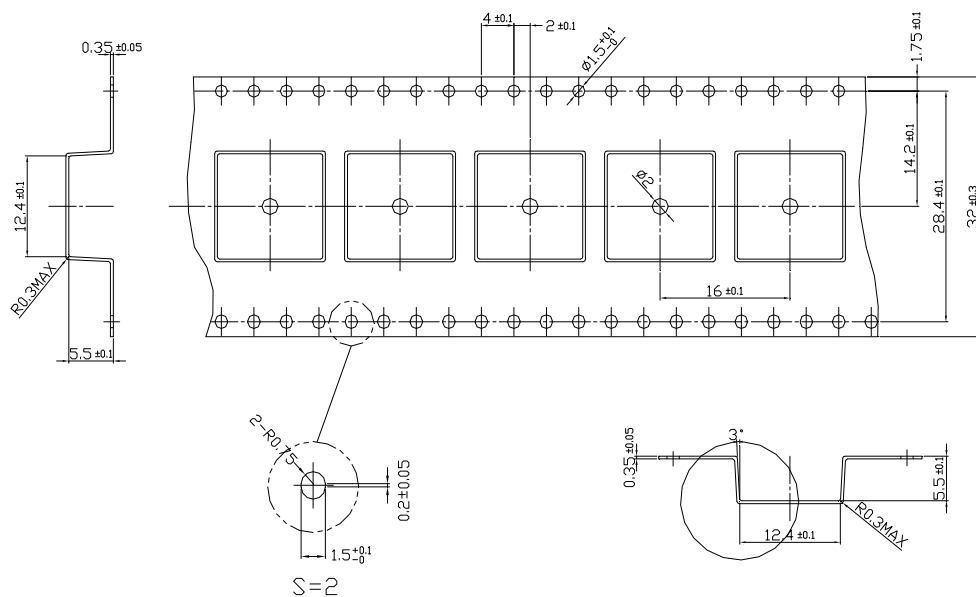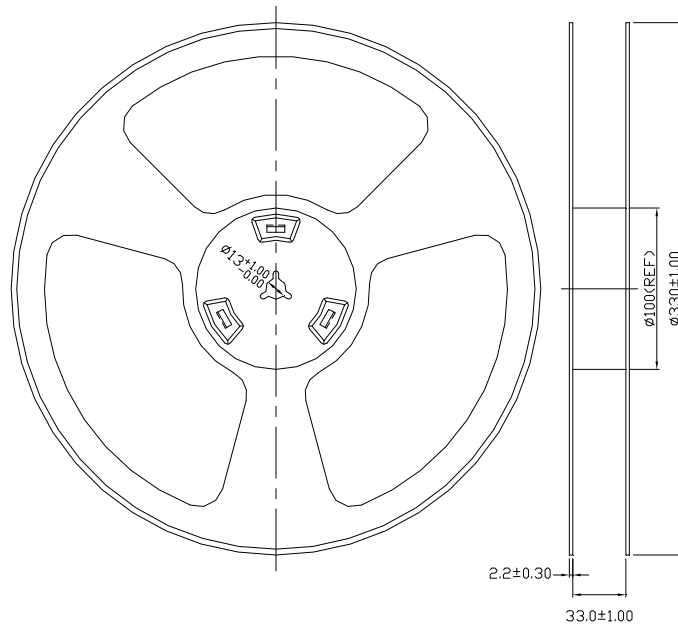

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and

product descriptions at any time without notice.

Taoglas reserves all rights to this document and the information

contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited. Copyright © Taoglas Ltd.