

Product Features

- GaAs MMIC
- Very Low Distortion
- Guaranteed Broadband Power Gain
- Heat Sink 99.9% Copper, Ag or Gold Plate
- Excellent Thermal Conductivity
- Single Supply Voltage @ 24V
- Low DC Power Consumption
- No External Circuit needed

Applications

- Drive Amplifier



Package Type : DP-27

Description

The RFC1G22- 24 is specifically designed for up to 1GHz in frequency as amplifiers. This hybrid dynamic range amplifier module operates with a single voltage supply of 24V(DC). The RFC1G22- 24 is equipped with over-voltage suppressor.

Electrical Specifications @ $V_{DD} = 24V, T_A = 25^{\circ}C$

PARAMETER	UNIT	MIN	TYP	MAX	CONDITION
Operating Frequency	MHz	20	-	1000	-
Gain	dB	21.0	22.0	-	f = 1000MHz
Gain Flatness	dB	-	1.5	2.0	f = 20 ~ 1000MHz
Input / Output VSWR	-	2.5 : 1	2.0 : 1	-	-
Power Output 1dB Comp.	dBm	29.0	30.0	-	f = 20 ~ 1000MHz
IMD3	dBc	56.0	60.0	-	Total Pout = 23dBm. Tone spacing 1MHz
Noise Figure	dB	-	4.0	7.0	f = 20 ~ 1000MHz
Supply Current	mA	-	400	430	-


Absolute Maximum Ratings

PARAMETER	UNIT	MIN	TYP	MAX	CONDITION
V_{DD} / V_{RFOUT}	VDC	-	-	28	-
RF_{OUT}	dBm	-	-	15	Single Tone
Storage Temperature	$^{\circ}C$	-40	-	100	-
Operating Temperature	$^{\circ}C$	-20	-	100	-


Typical Performance @ 25°C

PARAMETER	UNIT	TYP		
Frequency	MHz	20	500	1000
Gain	dB	21	22	22
Input Return Loss	dB	-14	-30	-15
Output Return Loss	dB	-16	-16	-17
Power Output 1dB Comp	dBm	29	30	29
OIP3	dBm	48.5	51	49
Noise Figure	dB	3.6	3.5	4.8
Supply Voltage	V	24		
Current	mA	430 (MAX)		


S-Parameters

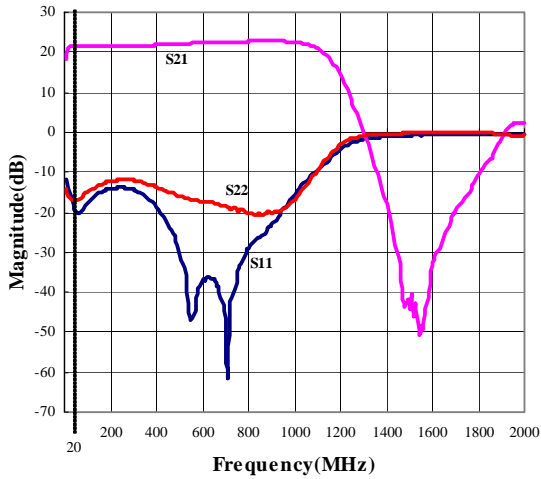


Power Output 1dB Compression

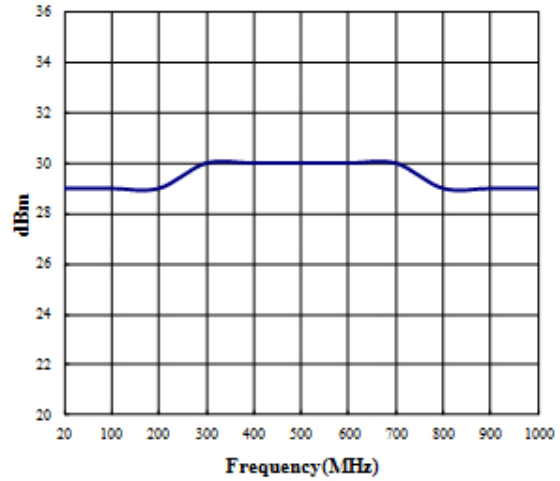


Noise Figure

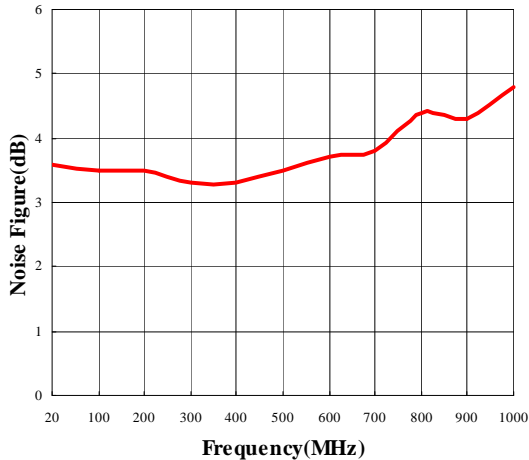

OIP 3

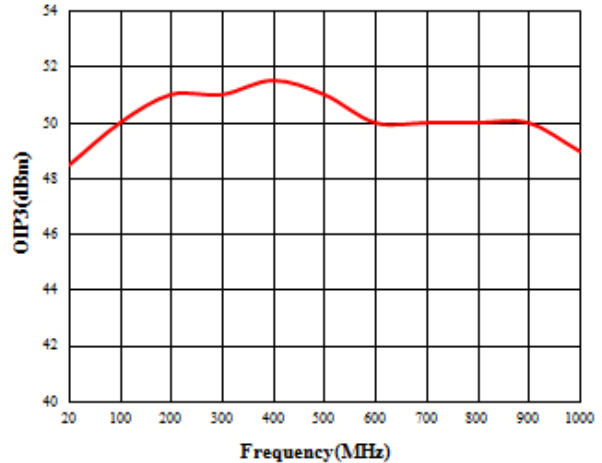

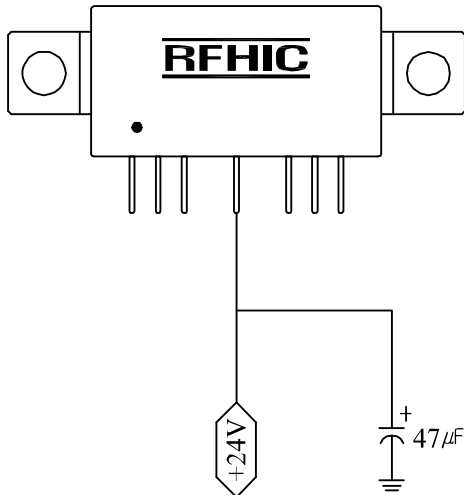Note for Correct Use

1. On the power input port (Pin#5), 47uF/35V capacitor GND is recommended.
2. The heat sink of CATV Hybrids is to be mounted in direct contact with the metal case of the equipment. Heat conducting grease should be applied to the module/equipment interface and the unit tightly secured.
3. Put the power off before adjusting in/output matching of the system.
4. The unit must have a common ground with the equipment and the analyzer.
5. Pay close attention to the input voltage not to over power the hybrid.
6. The space between bottom of socket and the tip of the lead is recommended to have space of 2mm+ to protect the pin.
7. Do not open the plastic cover to change the matching inside the hybrid. Once opened, RFHIC will not be responsible for the hybrid.


ESD Protection

Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices. Some of the precautions recommended are;

- Person at a workbench should be earthed via a wrist strap and a resistor.
 - All mains-powered equipment should be connected to the mains via an earth-leakage switch.
 - Equipment cases should be grounded.
 - Relative humidity should be maintained between 40% and 50%.
 - An ionizer is recommended.
- Keep static materials, such as plastic envelopes and plastic trays etc. away from the workbench.

Package Dimensions (Type: DP-27)

* Unit: mm[inch] | Tolerance: ±0.2[.008]

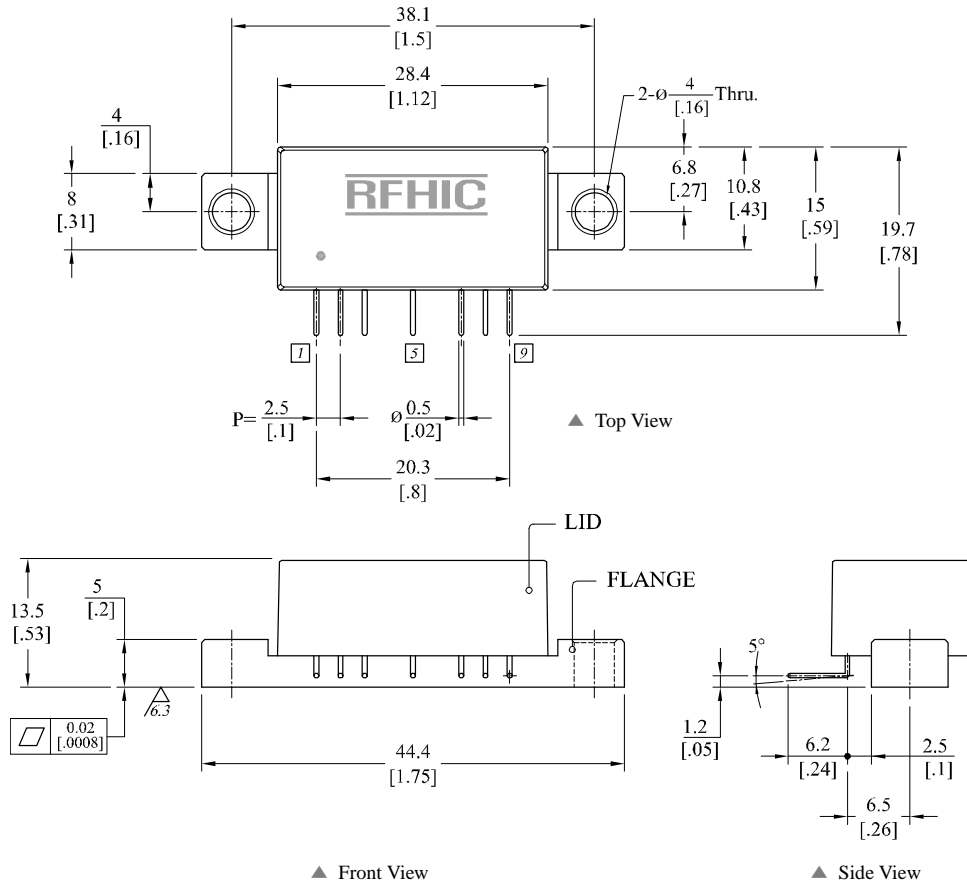

Pin Description					
Pin No	Function	Pin No	Function	Pin No	Function
1	RF Input	4	-	7	GND
2	GND	5	Vcc	8	GND
3	GND	6	-	9	RF Output

* Mounting Configuration Notes

1. Ground / thermal via holes are critical for the proper performance of this device.
2. Add as much copper as possible to inner and outer layers near the part to ensure optimal thermal performance.
3. Mounting screws can be added near the part to fasten the board to a heatsink. Ensure that the ground / thermal via hole region contacts the heatsink.
4. Do not put solder mask on the backside of the PCB in the region where the board contacts the heatsink.
5. RF trace width depends upon the PCB material and construction.
6. Use 1 oz. Copper minimum.

Revision History

Part Number	Release Date	Version	Modification	Data Sheet Status
RFC1G22-24	2012.11.6	5.9	Electrical Specifications, Typical Performance modification	-
RFC1G22-24	2012.9.5	5.8	-	-

RFHIC Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, RFHIC Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. RFHIC Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold RFHIC Corporation and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such unauthorized use.

Sales, inquiries and support should be directed to the local authorized geographic distributor for RFHIC Corporation. For customers in the US, please contact the US Sales Team at 919-677-8780. For all other inquiries, please contact the International Sales Team at 82-31-250-5078.