

1W Zener Diode

PTZ Series

●Applications

- 1) Voltage regulation and voltage limiting
- 2) Voltage surge absorption


●Features

- 1) Designed for mounting on small surface areas (PMDS)
- 2) 1W of power can be obtained despite compact size
- 3) High surge withstand level

●Construction

Silicon epitaxial planar

●External dimensions (Units: mm)

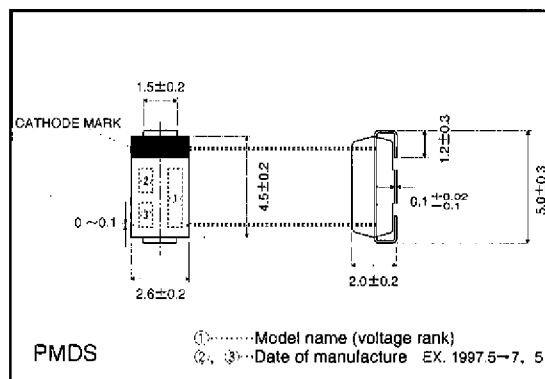

●Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Power dissipation *	P	1	W
Junction temperature	T _J	150	°C
Storage temperature	T _{stg}	-55~150	°C

* Mounting density of other power components should be taken into consideration when using these products.

●Electrical characteristics (Ta=25°C)

Type	Zener voltage subdivision				Operating resistance		Reverse current	
	Rank	Vz (V)		Iz (mA)	Zz (Ω)		I _R (μA)	
		Min.	Max.		Max.	Iz (mA)	Max.	V _R (V)
PTZ 3.6	A	3.400	3.800	40	15	40	60	1.0
	B	3.600	4.000					
PTZ 3.9	A	3.700	4.100	40	15	40	40	1.0
	B	3.900	4.400					
PTZ 4.3	A	4.000	4.500	40	15	40	20	1.0
	B	4.300	4.800					
PTZ 4.7	A	4.400	4.900	40	10	40	20	1.0
	B	4.700	5.200					
PTZ 5.1	A	4.800	5.400	40	8	40	20	1.5
	B	5.100	5.700					
PTZ 5.6	A	5.300	6.000	40	8	40	20	1.5
	B	5.600	6.300					
PTZ 6.2	A	5.800	6.600	40	6	40	20	3.0
	B	6.200	7.000					
PTZ 6.8	A	6.400	7.200	40	6	40	20	3.5
	B	6.800	7.700					
PTZ 7.5	A	7.000	7.900	40	4	40	20	4.0
	B	7.500	8.400					
PTZ 8.2	A	7.700	8.700	40	4	40	20	5.0
	B	8.200	9.300					
PTZ 9.1	A	8.500	9.600	40	6	40	20	6.0
	B	9.100	10.200					
PTZ 10	A	9.400	10.600	40	6	40	10	7.0
	B	10.000	11.200					
PTZ 11	A	10.400	11.600	20	8	20	10	8.0
	B	11.000	12.300					
PTZ 12	A	11.400	12.600	20	8	20	10	9.0
	B	12.000	13.500					
PTZ 13	A	12.400	14.100	20	10	20	10	10.0
	B	13.300	15.000					
PTZ 15	A	13.800	15.600	20	10	20	10	11.0
	B	14.700	16.500					
PTZ 16	A	15.300	17.100	20	12	20	10	12.0
	B	16.200	18.300					
PTZ 18	A	16.800	19.100	20	12	20	10	13.0
	B	18.000	20.300					
PTZ 20	A	18.800	21.200	20	14	20	10	15.0
	B	20.000	22.400					
PTZ 22	A	20.800	23.300	10	14	10	10	17.0
	B	22.000	24.500					

(Continued on next page)

Type	Zener voltage subdivision			Operating resistance		Reverse current	
	Rank	V _Z (V)		Z _Z (Ω)		I _R (μA)	
		Min.	Max.	I _Z (mA)	Max.	I _Z (mA)	V _R (V)
PTZ 24	A	22.800	25.600	10	16	10	19.0
	B	24.000	27.600				
PTZ 27	A	25.100	28.900	10	16	10	21.0
	B	27.000	30.800				
PTZ 30	A	28.000	32.000	10	18	10	23.0
	B	30.000	34.000				
PTZ 33	A	31.000	35.000	10	18	10	25.0
	B	33.000	37.000				
PTZ 36	A	34.000	38.000	10	20	10	27.0
	B	36.000	40.000				
PTZ 39	A	37.000	41.000	10	50	10	30.0
PTZ 43	A	40.000	46.000	10	50	5	33.0

Notes) 1. The Zener voltage is measured 40 ms after power is supplied.

2. The operating resistances (Z_Z, Z_{zk}) are measured by superimposing a minute alternating current on the regulated current (I_Z).

3. For the Zener voltage subdivisions, the free ranks (A, B, or C) or recommended when ordering.

●Electrical characteristic curves (Ta=25°C)

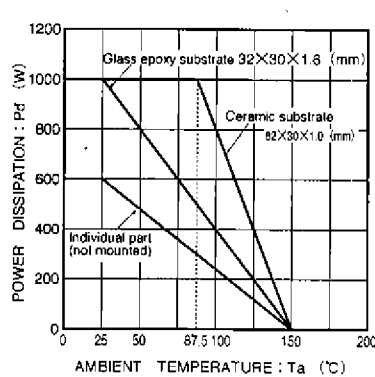


Fig. 1 Derating curve

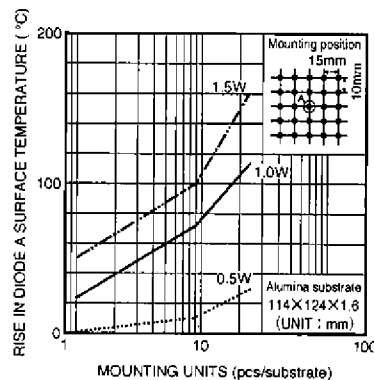


Fig. 2 Rise in surface temperature

If this product is being mounted on a substrate, the density with other power components should be taken into consideration.

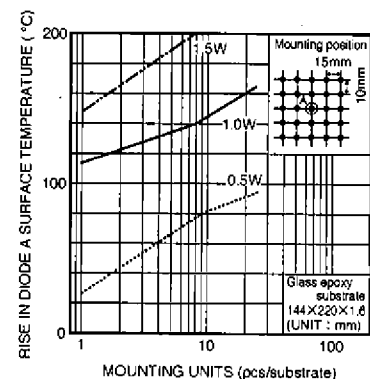


Fig. 3 Rise in surface temperature

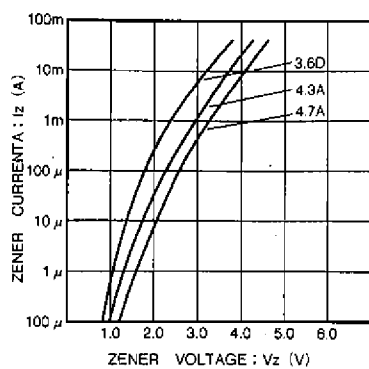


Fig. 4 PTZ2.0~PTZ4.7
Zener characteristics

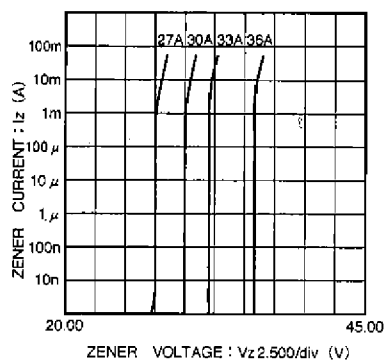


Fig. 5 PTZ27~PTZ36
Zener characteristics

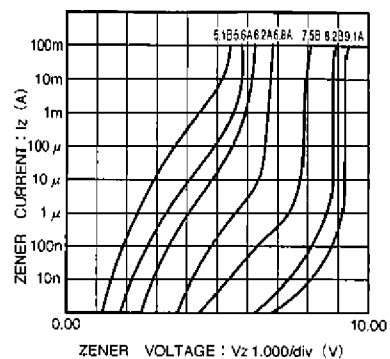


Fig. 6 PTZ5.1~PTZ9.1
Zener characteristics

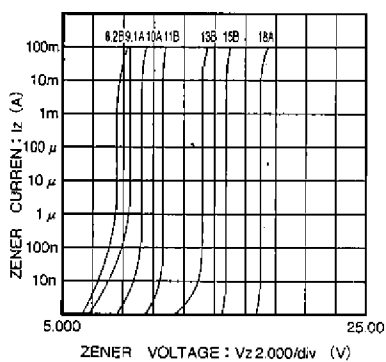


Fig. 7 PTZ8.2~PTZ18
Zener characteristics

Zener diodes

Zener diodes

Notes

- The contents described in this catalogue are correct as of March 1997.
- No unauthorized transmission or reproduction of this book, either in whole or in part, is permitted.
- The contents of this book are subject to change without notice. Always verify before use that the contents are the latest specifications. If, by any chance, a defect should arise in the equipment as a result of use without verification of the specifications, ROHM CO., LTD., can bear no responsibility whatsoever.
- Application circuit diagrams and circuit constants contained in this data book are shown as examples of standard use and operation. When designing for mass production, please pay careful attention to peripheral conditions.
- Any and all data, including, but not limited to application circuit diagrams, information, and various data, described in this catalogue are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO., LTD., disclaims any warranty that any use of such device shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes absolutely no liability in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices; other than for the buyer's right to use such devices itself, resell or otherwise dispose of the same; no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by ROHM CO., LTD., is granted to any such buyer.

The products listed in this catalogue are designed to be used with ordinary electronic equipment or devices (such as audio-visual equipment, office-automation equipment, communications devices, electrical appliances, and electronic toys). Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers, or other safety devices) please be sure to consult with our sales representative in advance.

- Note when exporting
 - It is essential to obtain export permission when exporting any of the above products when it falls under the category of strategic material (or labor) as determined by foreign exchange or foreign trade control laws.
 - Please be sure to consult with our sales representatives to ascertain whether any product is classified as a strategic material.