

Toshiba Intelligent Power Device Silicon Monolithic Power MOS Integrated Circuit

TPD1054F


Low-Side Switch for Motor, Solenoid and Lamp Drive

The TPD1054F is a low-side switch.

The IC has a MOSFET (D-MOS) output which can be directly driven from a CMOS or TTL logic circuit (e.g., an MPU). The IC is equipped with intelligent self-protection functions.


Features

- A monolithic power IC with a new structure combining a control block and a power MOSFET (D-MOS) on single chip.
- Can directly drive a power load from a CMOS or TTL logic.
Built-in protection circuits against overvoltage (active clamp), overtemperature (thermal shutdown).
- Incorporates a diagnosis function that allows diagnosis output to be read externally at load short-circuiting, opening, or over temperature
- Low Drain-Source ON-resistance:
 $R_{DS(ON)} = 0.8 \Omega$ (max) (@ $V_{DD} = 5 V, V_{STBY} = 5 V, V_{IN} = 5 V, I_O = 0.5 A, T_{ch} = 25^\circ C$)
- Low Leakage Current:
 $I_{DD1} = 10 \mu A$ (max) (@ $V_{IN} = 0 V, V_{STBY} = 0 V, V_{DD} = 5 V, T_{ch} = -40$ to $125^\circ C$)
 $I_{OL} = 10 \mu A$ (max) (@ $V_{IN} = 0 V, V_{STBY} = 0 V, V_{DD} = 5 V, V_{OUT} = 8$ to $16 V, T_{ch} = -40$ to $125^\circ C$)
- “PS-8” package with embossed-tape packing.

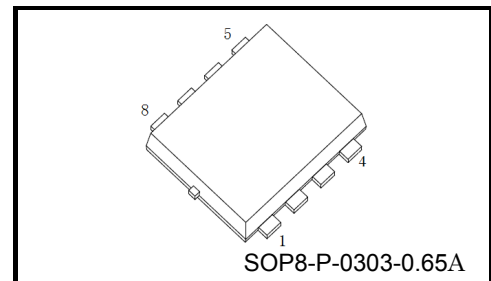


Weight: 0.017 g (typ.)

Pin Assignment (top view)

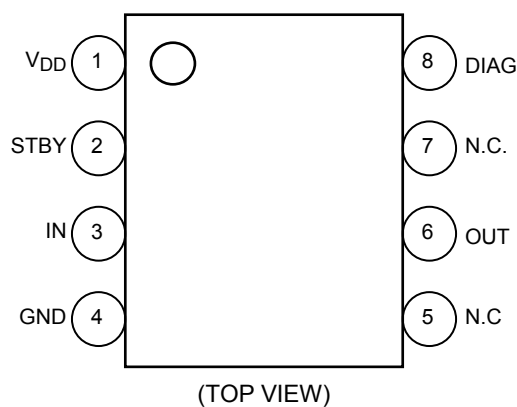


Marking

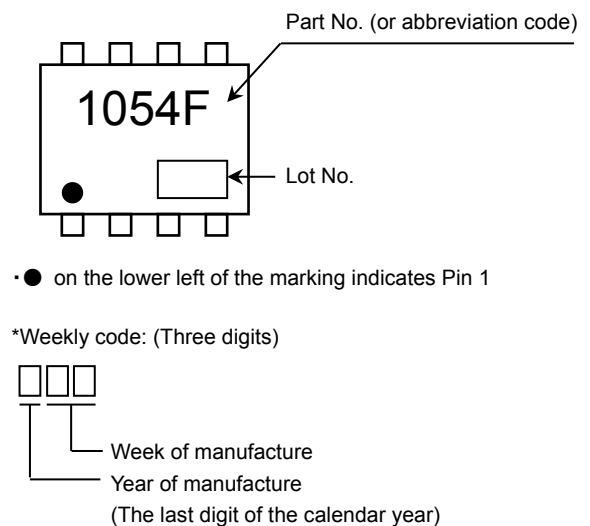

Due to its MOS structure, this product is sensitive to static electricity.

Start of commercial production
2013-12


Block Diagram

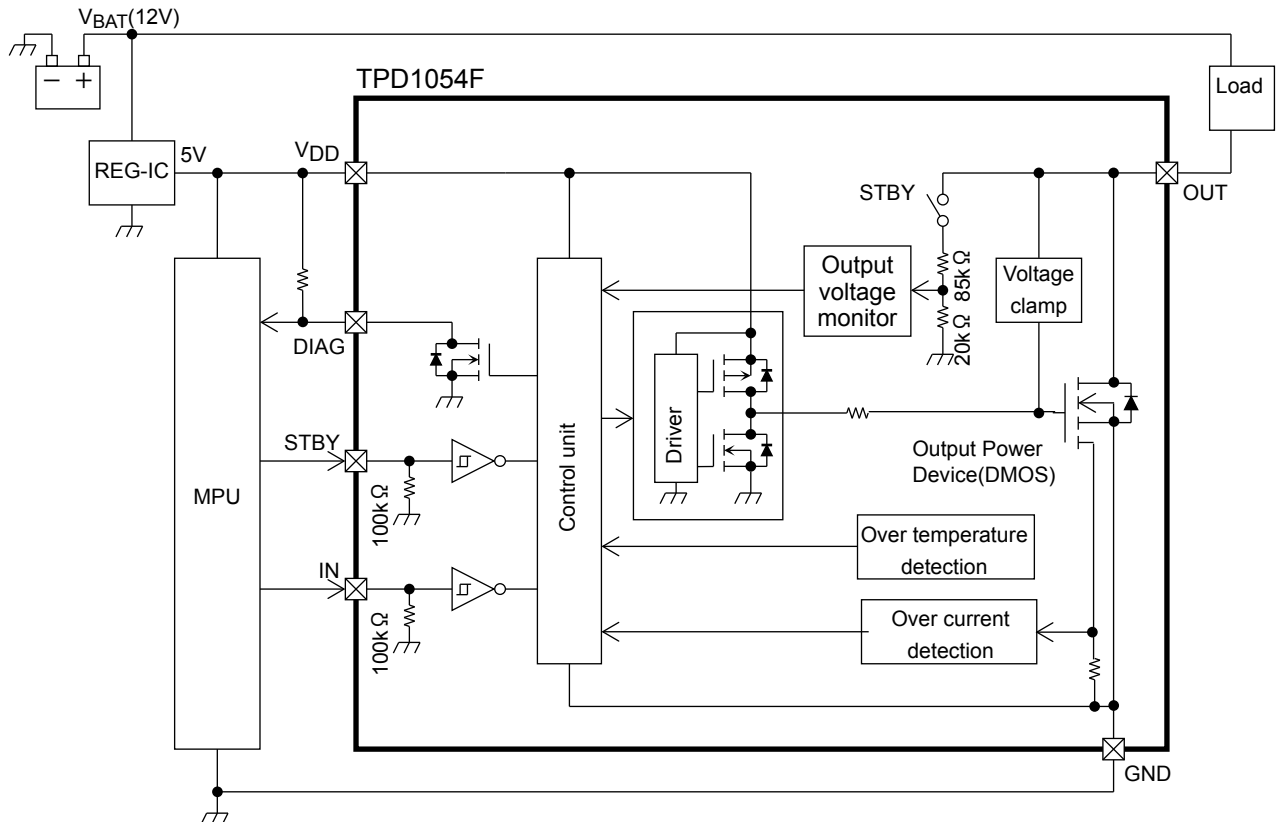

Pin Description

Pin No.	Symbol	Pin Description
1	V _{DD}	Power supply pin.
2	STBY	STBY pin. V _{STBY} =L/Open : I _{DD} ≤ 10μA (Standby mode) V _{STBY} =H : Active control
3	IN	I Input pin. The IN pin has an internal pull-down resistor. Even if the IN pin is open, the output will not accidentally turn on.
4	GND	Ground pin.
5	N.C	No-Connect pin. (not connected to the chip.)
6	OUT	Output pin. When a load short-circuit causes an overcurrent (1.0A min) to flow into a device, output current is limited in order to protect the IC.
7	N.C	No-Connect pin. (not connected to the chip.)
8	DIAG	Self-diagnosis detection. open Drain. When Input is "H"(Output on), and Overcurrent or Overtemperature is detected, DIAG becomes low level and it is latched. When input is low level, the state of latch is reset.

Timing chart

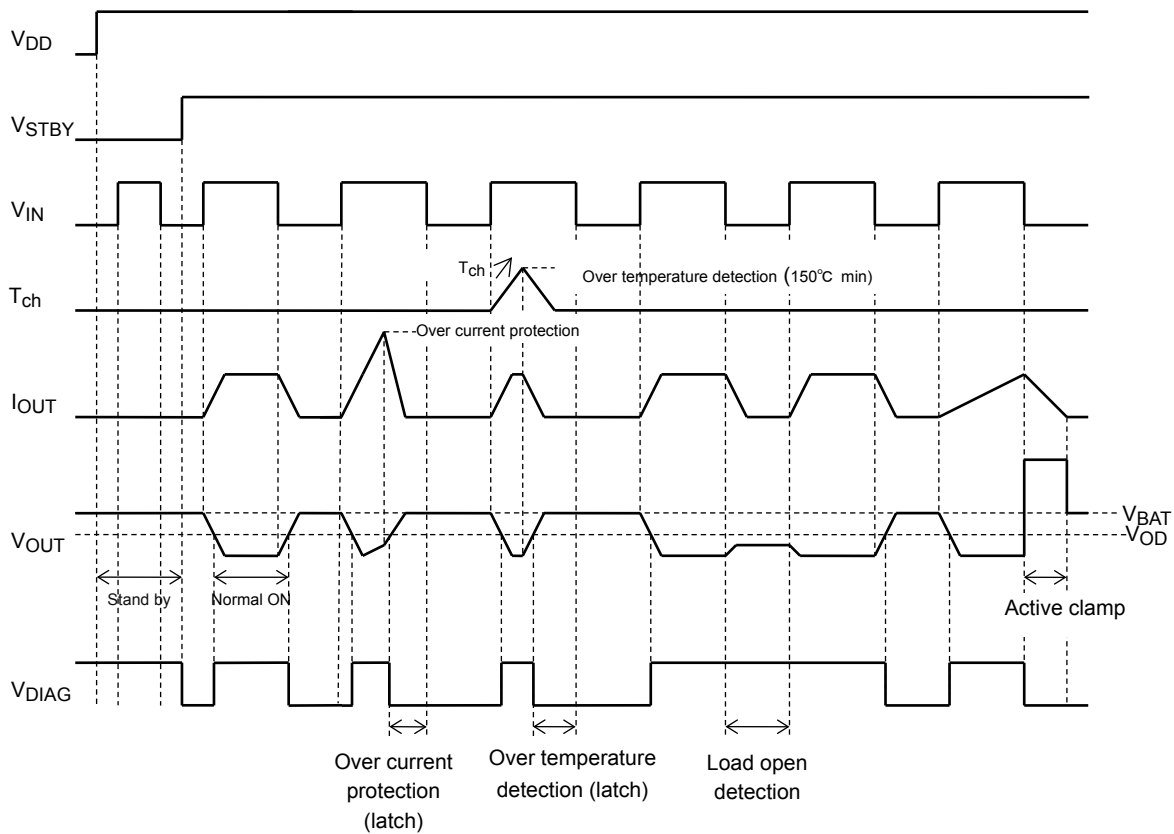

Truth table

STBY	IN	Output state	VOUT	DIAG	Operating state
L	L	OFF	H	H	Standby mode
L	H	OFF	H	H	
H	L	OFF	H	L	Normal OFF
H	H	ON	L	H	Normal ON
H	H	OFF(latch)	H	L(latch)	Overcurrent (load short)
H	H	OFF(latch)	H	L(latch)	Over temperature
H	L	OFF	L	H	Load open

*VOUT=H>=VOD, VOUT=L<VOD

*Latch reset condition: VSTBY<VIL or VSTBY<VIL

Absolute Maximum Ratings (Ta = 25°C)

Characteristics	Symbol	PIN	Rating	Unit	Note
Supply voltage	V _{DD}	VDD	-0.3 to 6.0	V	-
Input voltage	V _{IN} , V _{STBY}	IN, STBY	-0.3 to 6.0	V	-
Diagnosis output voltage	V _{DIAG}	DIAG	-0.3 to 6.0	V	-
Diagnosis output current	I _{DIAG}	DIAG	5.0	mA	-
Output voltage	V _{OUT}	OUT	-0.3 to 40	V	-
Output current	I _{OUT}	OUT	Internally Limited	A	-
Power dissipation (Note 2)	P _{D(1)}	-	0.7	W	(Note 2-a)
	P _{D(2)}	-	0.35	W	(Note 2-b)
Single pulse active clamp capability (Note 3)	E _{AS}	-	125	mJ	-
Active clamp current	I _{AR}	-	1.0	A	-
Operating temperature	T _{opr}	-	-40 to 125	°C	-
Channel temperature	T _{ch}	-	150	°C	-
Storage temperature	T _{stg}	-	-55 to 150	°C	-

Note1: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings and the operating ranges.


Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/"Derating Concept and Methods") and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

Thermal Characteristics

Characteristics	Symbol	Max	Unit
Thermal resistance, channel to ambient	R _{th (ch-a)}	178.6(Note 2a)	°C/W
		357.2(Note 2b)	


Note 2:

(a) Glass epoxy board



Glass epoxy board
Material: FR-4
25.4mm×25.4mm×0.8mm

(b) Glass epoxy board



Glass epoxy board
Material: FR-4
25.4mm×25.4mm×0.8mm

Note 3: Active clamp capability (single pulse) test condition
V_{DD}=40 V, T_{ch}=25°C(initial), L=50 mH, I_{AR}=1 A

Electrical Characteristics



(Unless otherwise specified $T_{ch} = -40$ to 125°C , $V_{DD} = 4.5$ to 5.5V)







Characteristics	Symbol	Test Circuit	Pin	Test condition	Min	Typ.	Max	Unit
Drain-source clamp voltage	$V_{(CL)DSS}$	-	OUT	$I_O=1\text{mA}$, $V_{STBY}=5\text{V}$, $V_{IN}=0\text{V}$	40	45	50	V
Operating supply voltage	$V_{DD(opr)}$	-	VDD	-	4.5	5	5.5	
Supply current	I_{DD1}	-	VDD	$V_{STBY}=0\text{V}$, $V_{IN}=0\text{V}$, $V_{DD}=5\text{V}$,	-	-	10	μA
	I_{DD2}	-	VDD	$V_{STBY}=5\text{V}$, $V_{IN}=0\text{V}$, $V_{DD}=5\text{V}$	-	0.5	2	mA
	I_{DD3}	-	VDD	$V_{STBY}=5\text{V}$, $V_{IN}=5\text{V}$, $V_{DD}=5\text{V}$	-	0.5	2	mA
Output leakage current	I_{OL1}	-	OUT	$V_{STBY}=V_{IL}$, $V_{IN}=V_{IL}$, $V_{OUT}=8$ to 16V	-	-	10	μA
	I_{OL2}	-	OUT	$V_{STBY}=V_{IH}$, $V_{IN}=V_{IL}$, $V_{OUT}=8$ to 16V	-	120	300	μA
Input voltage	V_{IH}	-	IN,STBY	-	2.3	-	-	V
	V_{IL}	-	IN,STBY	-	-	-	0.8	V
Input current	I_{IH}	-	IN,STBY	$V_{IN}(V_{STBY})=5\text{V}$, $V_{DD}=5\text{V}$	-	-	200	μA
	I_{IL}	-	IN,STBY	$V_{IN}(V_{STBY})=0\text{V}$, $V_{DD}=5\text{V}$	-1	-	1	μA
Diagnosis output voltage	V_{DL}	-	DIAG	$I_{DIAG}=1\text{mA}$	-	0.1	0.5	V
Diagnosis output current	I_{DH}	-	DIAG	$V_{DIAG}=5.5\text{V}$	-	-	10	μA
Drain-source ON-resistance	$R_{DS(ON)1}$	-	OUT	$I_O=+0.5\text{A}$, $T_{ch}=25^{\circ}\text{C}$, $V_{DD}=5\text{V}$, $V_{STBY}=V_{IH}$, $V_{IN}=V_{IH}$	-	0.45	0.8	Ω
	$R_{DS(ON)2}$	-	OUT	$I_O=+0.5\text{A}$, $T_{ch}=-40$ to 125°C , $V_{DD}=5\text{V}$, $V_{STBY}=V_{IH}$, $V_{IN}=V_{IH}$	-	-	1.2	Ω
Overtemperature detection	T_{OT}	-	-	$V_{STBY}=5\text{V}$, $V_{IN}=5\text{V}$,	150	175	200	$^{\circ}\text{C}$
Overcurrent detection	I_{OC}	-	OUT	$V_{STBY}=5\text{V}$, $V_{IN}=5\text{V}$,	1.0	2.2	3.5	A
Load open threshold resistance	R_{OP}	-	OUT	$V_{STBY}=5\text{V}$, $V_{IN}=0\text{V}$, $V_{BAT}=8$ to 16V	10	300	1000	k Ω
	ΔR_{OP}	-	OUT	$V_{STBY}=5\text{V}$, $V_{IN}=0\text{V}$, $V_{BAT}=8$ to 16V	-	30	-	k Ω
Diagnosis output threshold voltage	V_{OD}	-	OUT	$V_{STBY}=5\text{V}$,	2	3	4	V
	ΔV_{OD}	-	OUT	$V_{STBY}=5\text{V}$,	-	0.3	-	V
OUT-GND internal resistance	R_{OUT1}	-	OUT	$V_{STBY}=5\text{V}$, $V_{IN}=0\text{V}$, $T_{ch}=25^{\circ}\text{C}$	50	105	170	k Ω
	R_{OUT2}	-	OUT	$V_{STBY}=5\text{V}$, $V_{IN}=0\text{V}$, $T_{ch}=-40$ to 125°C	40	105	200	k Ω
Switching time	t_{on}	1	OUT	$V_{STBY}=5\text{V}$, $V_{IN}=0 \rightarrow 5\text{V}$, $V_{DD}=5\text{V}$, $T_{ch}=25^{\circ}\text{C}$, $V_{BAT}=12\text{V}$, $R_L=60\Omega$	-	0.5	1	μs
	t_{off}	1	OUT	$V_{STBY}=5\text{V}$, $V_{IN}=5 \rightarrow 0\text{V}$, $V_{DD}=5\text{V}$, $T_{ch}=25^{\circ}\text{C}$, $V_{BAT}=12\text{V}$, $R_L=60\Omega$	-	0.5	1	







*The condition of the typical value is $T_{ch}=25^{\circ}\text{C}$, $V_{DD}=5\text{V}$.







Test Circuit


Switching time t_{on} , t_{off}

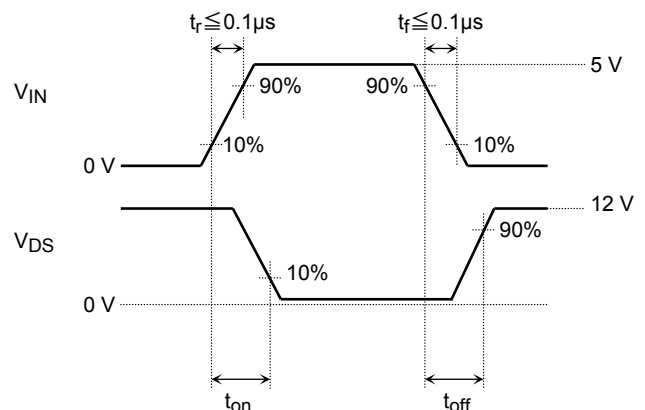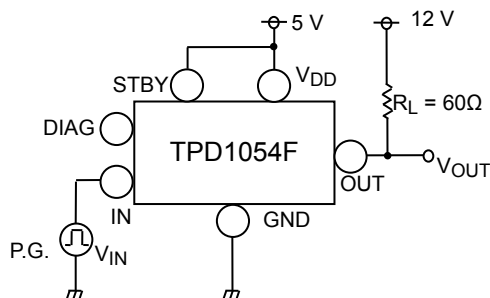

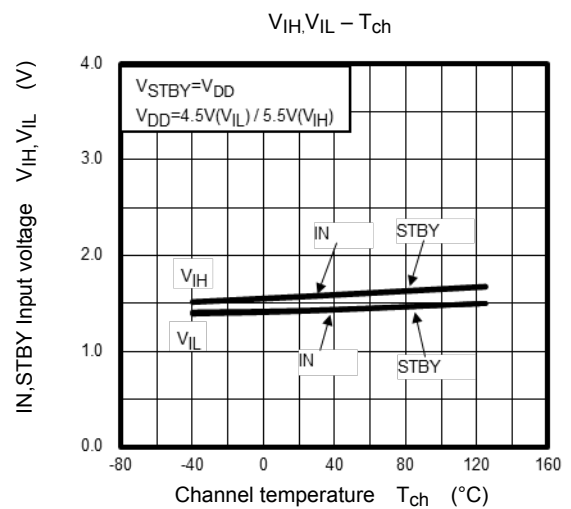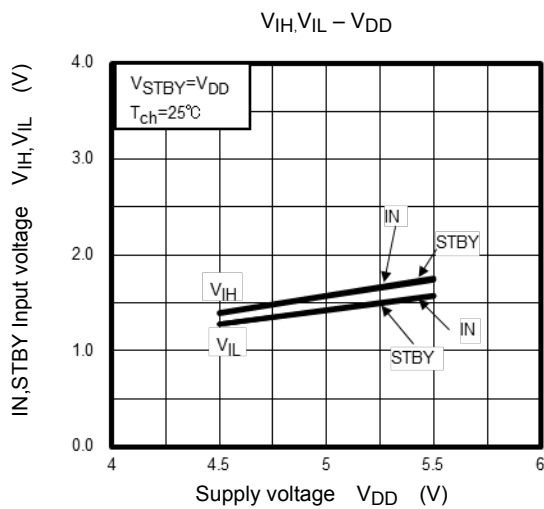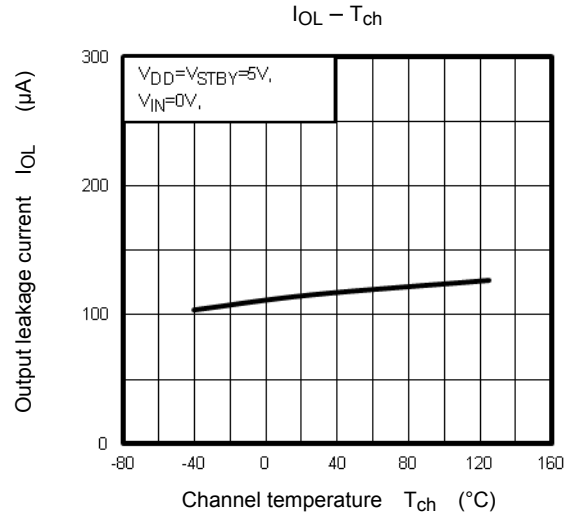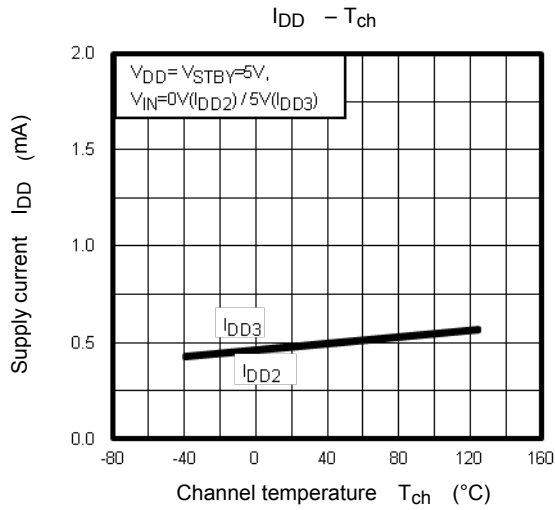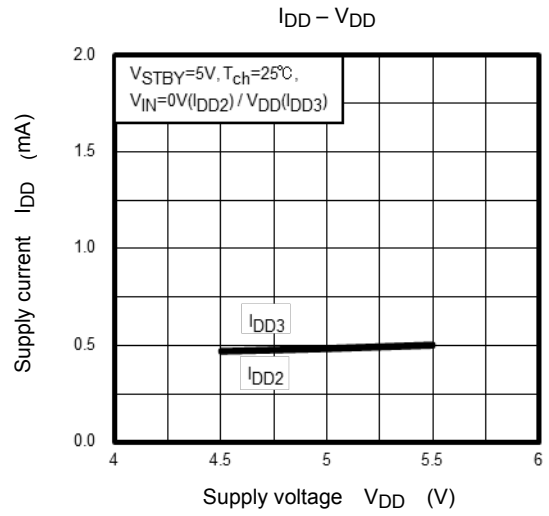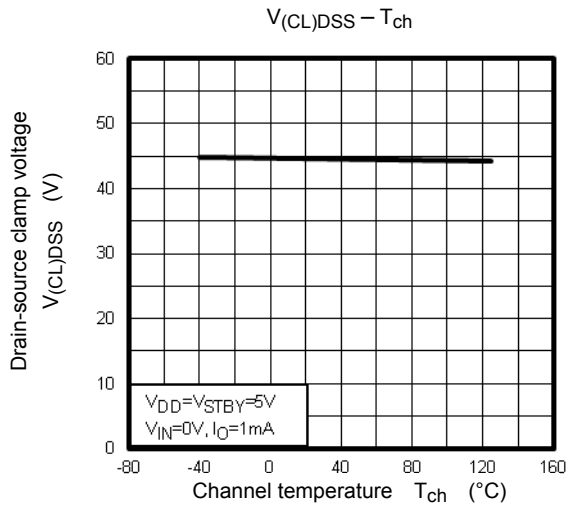

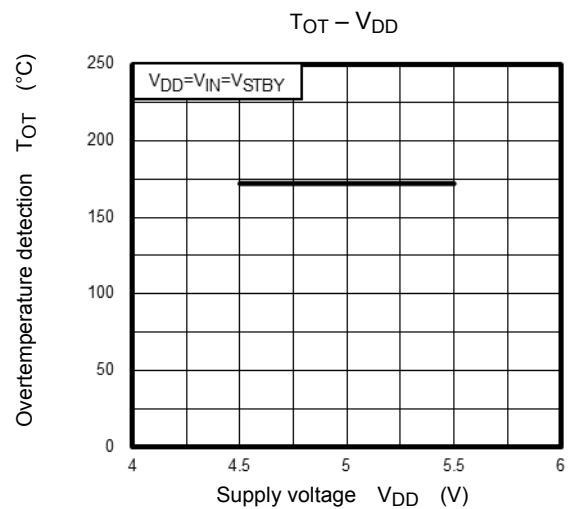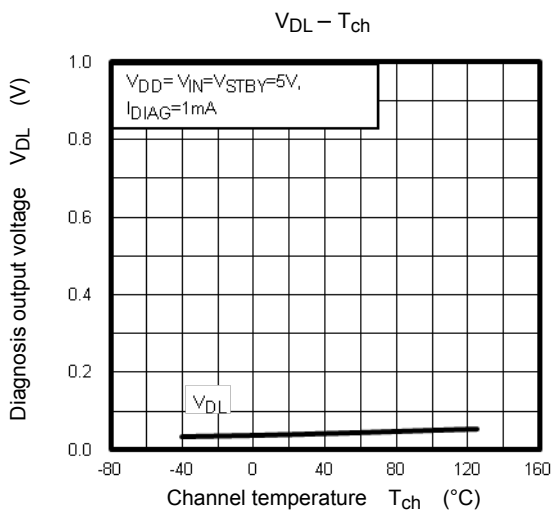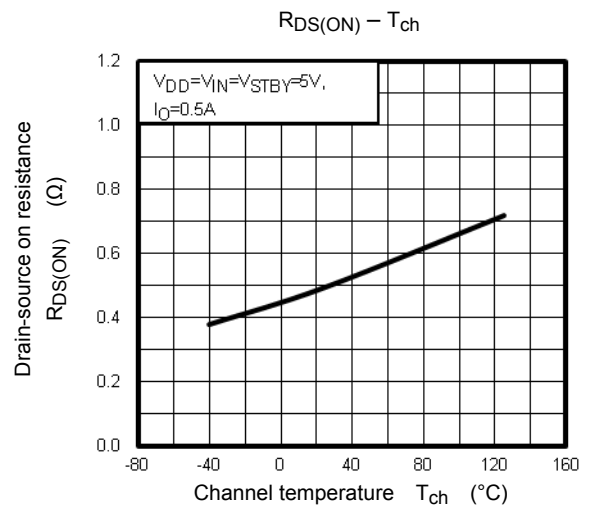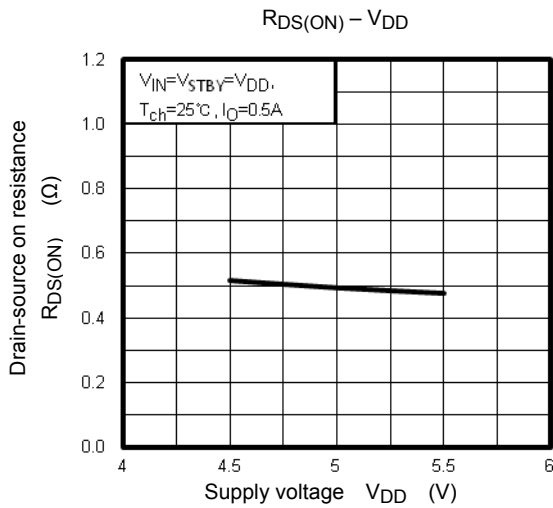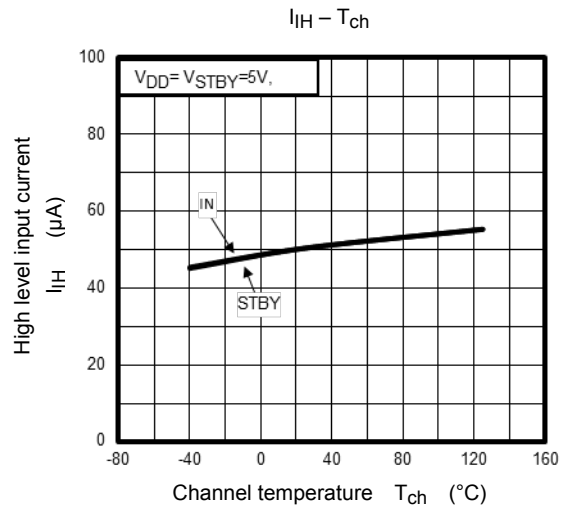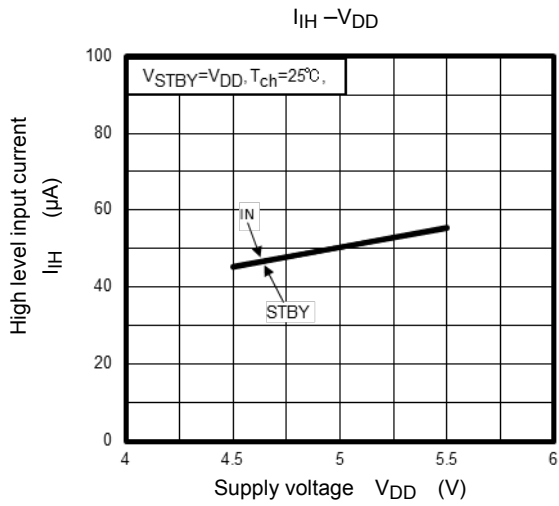

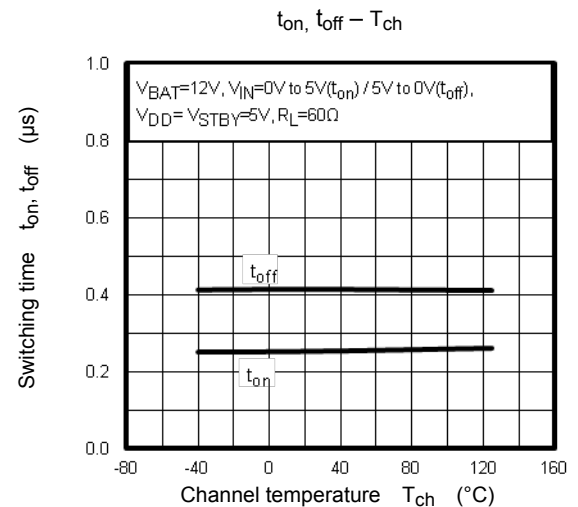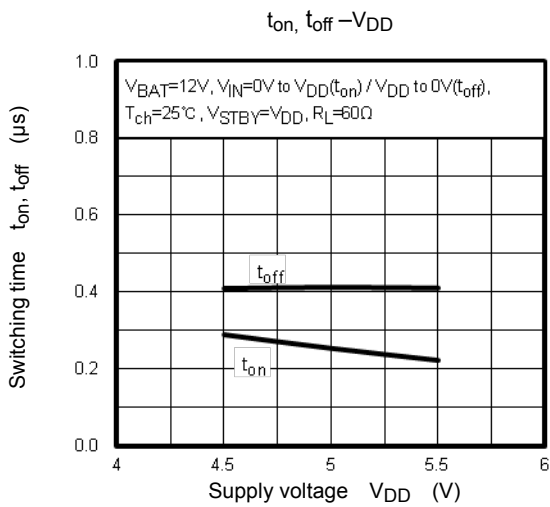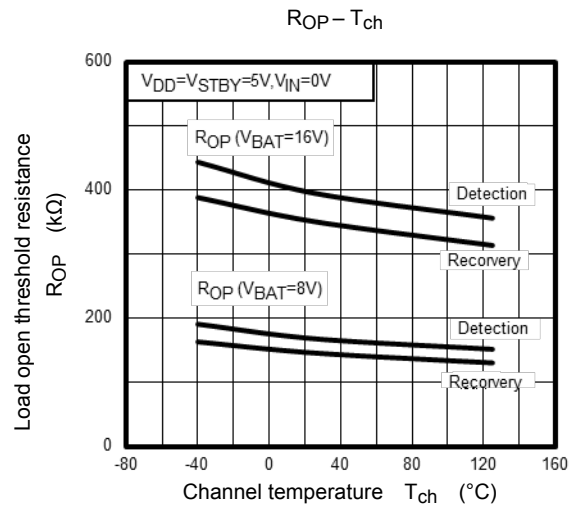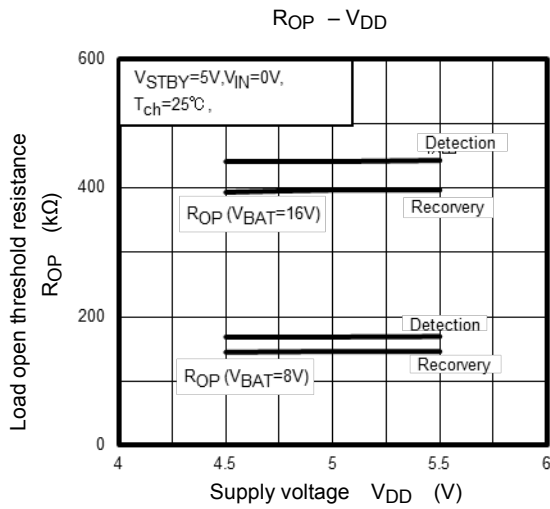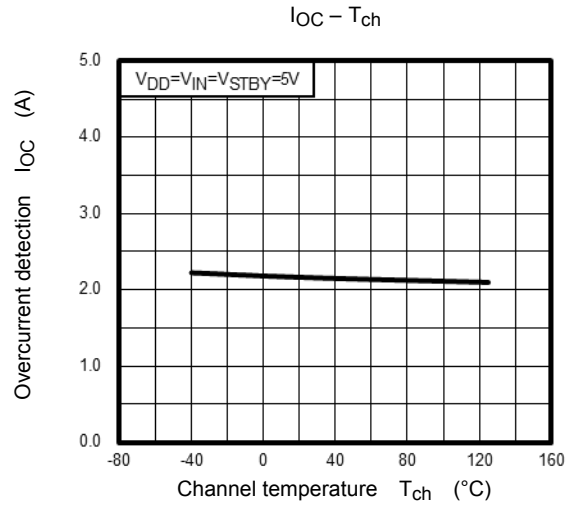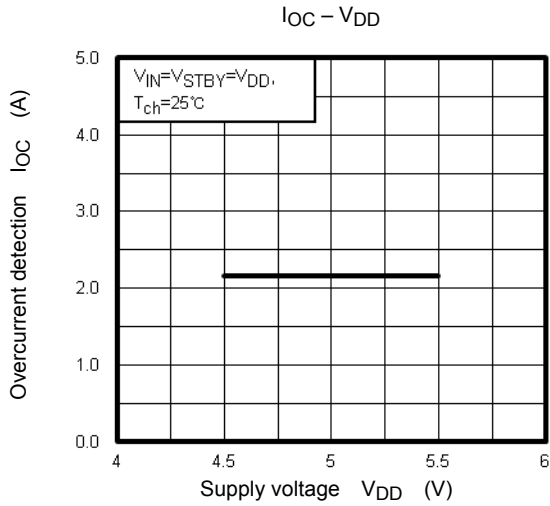


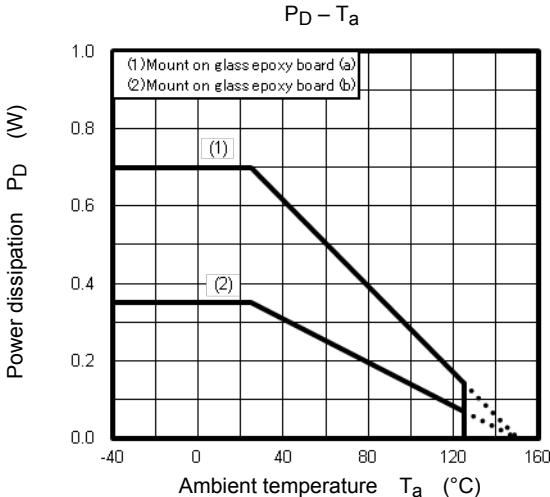

Package Dimensions

SOP8-P-0303-0.65A

Unit : mm

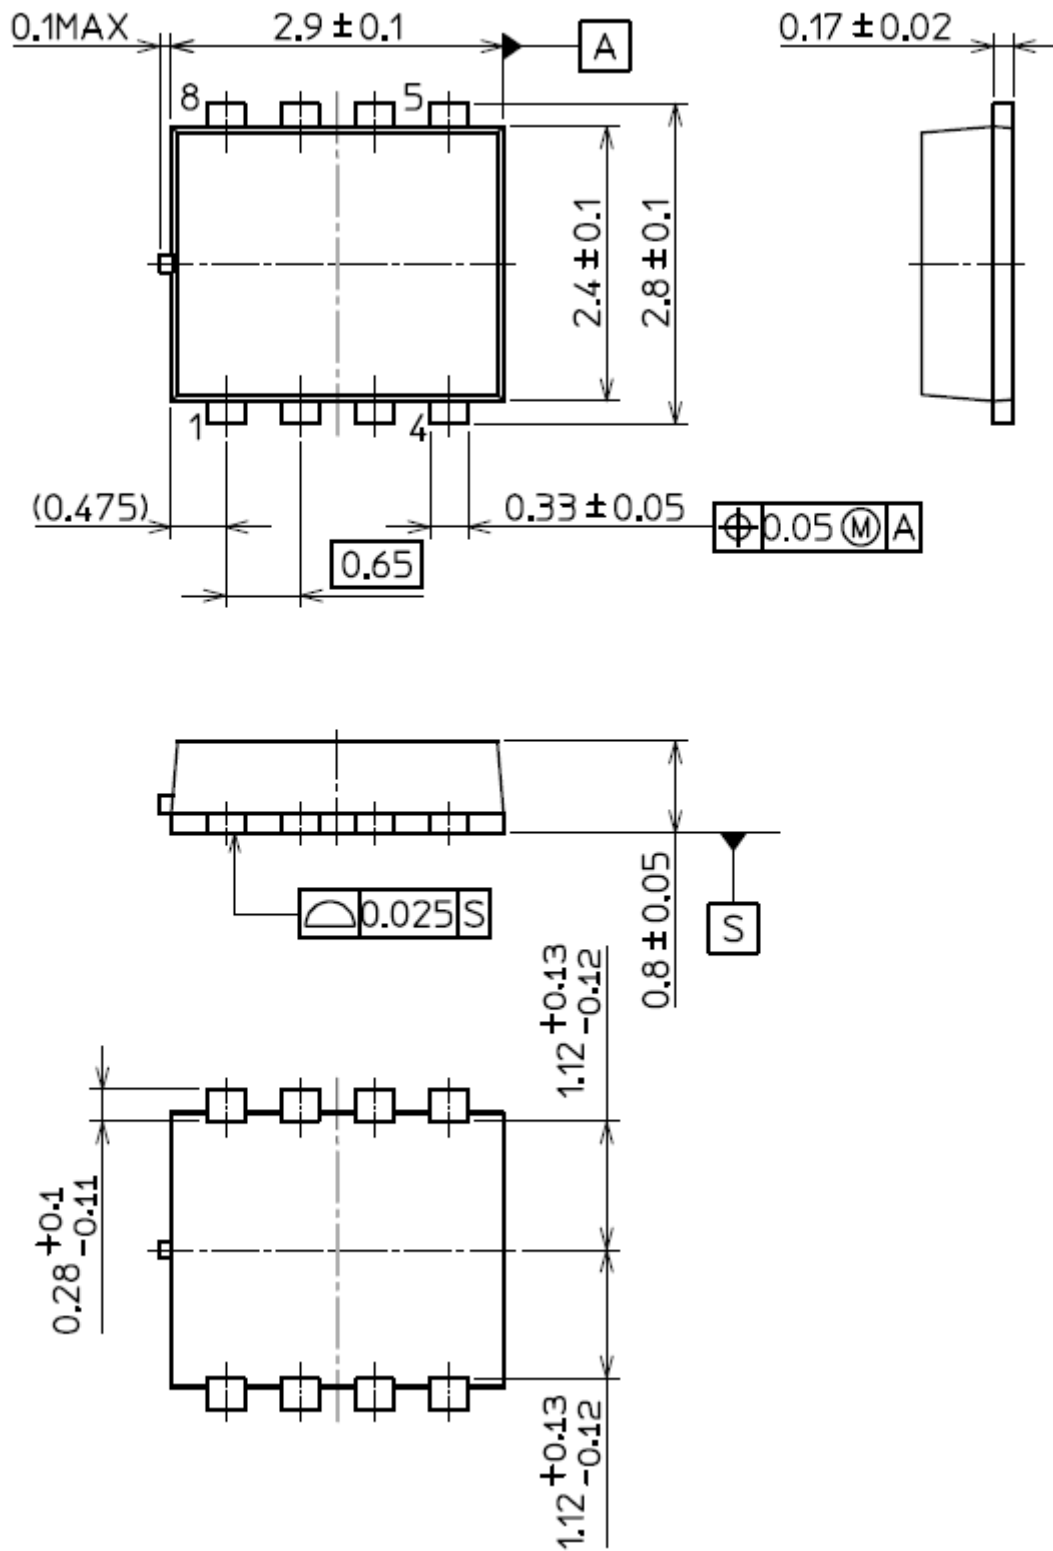

Weight: 0.017 g (Typ.)

RESTRICTIONS ON PRODUCT USE

- Toshiba Corporation, and its subsidiaries and affiliates (collectively "TOSHIBA"), reserve the right to make changes to the information in this document, and related hardware, software and systems (collectively "Product") without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, devices related to electric power, and equipment used in finance-related fields. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**