



GOOD-ARK

LL4148

SILICON EPITAXIAL PLANAR DIODE

Features

Silicon Epitaxial Planar Diode


fast switching diode in MiniMELF case especially suited for automatic insertion.

Identical electrically to standard 1N4148

These diode are delivered taped. Details see "Taping".

Weight approx. : 0.05g

MiniMELF

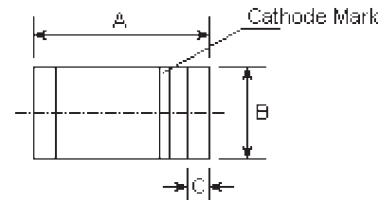

DIMENSIONS					
DIM	inches		mm		Note
	Min.	Max.	Min.	Max.	
A	0.134	0.142	3.4	3.6	
B	0.055	0.059	1.40	1.50	φ
C	0.008	0.016	0.2	0.4	

Absolute Maximum Ratings (T_a=25°C)

	Symbols	Values	Units
Reverse Voltage	V _R	75	Volts
Peak reverse voltage	V _{RM}	100	Volts
Rectified current (Average) Half wave rectification with Resist. Load at T _{amb} =25°C and f≥50Hz	I _O	150 ⁽¹⁾	mA
Surge forward current at t<1s and T _J =25°C	I _{FSM}	500	mA
Power dissipation at T _{amb} =25°C	P _{tot}	500 ⁽¹⁾	mW
Junction Temperature	T _J	175	°C
Storage temperature range	T _S	-65 to +175	°C

Note:


(1) Valid provided that electrodes are kept at ambient temperature

Characteristics at $T_j=25^\circ\text{C}$

	Symbols	Min.	Typ.	Max.	Units
Forward voltage at $I_F=10\text{mA}$	V_F	-	-	1	Volt
Leakage current at $V_R=20\text{V}$ at $V_R=75\text{V}$ at $V_R=20\text{V}, T_j=150^\circ\text{C}$	I_{R1} I_{R2} I_{R3}	- - -	- - -	25 5 50	nA uA uA
Reverse breakdown voltage tested with 100uA pulses	$V_{(BR)R}$	100	-	-	Volts
Capacitance at $V_F=V_R=0$	C_{tot}	-	-	4	pF
Voltage rise when switching ON tested with 50mA forward pulses $t_p=0.1\mu\text{s}$, rise time $<30\text{nS}$, $f_p=5$ to 100kHz	V_{fr}	-	-	2.5	Volts
Reverse recovery time from $I_F=10\text{mA}$ to $I_R=1\text{mA}$, $V_R=6\text{V}$, $R_L=100\Omega$	t_{rr}	-	-	4	nS
Thermal resistance junction to ambient Air	R_{thA}	-	-	0.35 ⁽¹⁾	K/mW
Rectification efficiency at $f=100\text{MHz}$, $V_{RF}=2\text{V}$	η_V	0.45	-	-	-



Note:

(1) Valid provided that electrodes are kept at ambient temperature

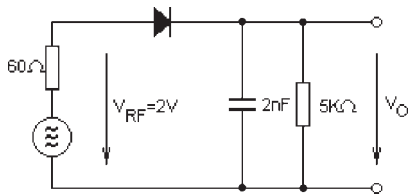


Rectification efficiency measurement circuit

RATINGS AND CHARACTERISTIC CURVES

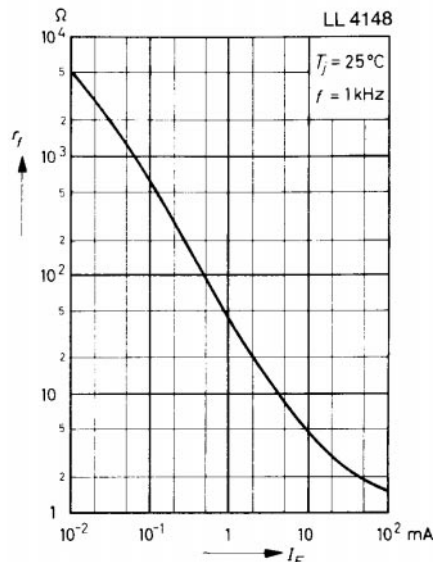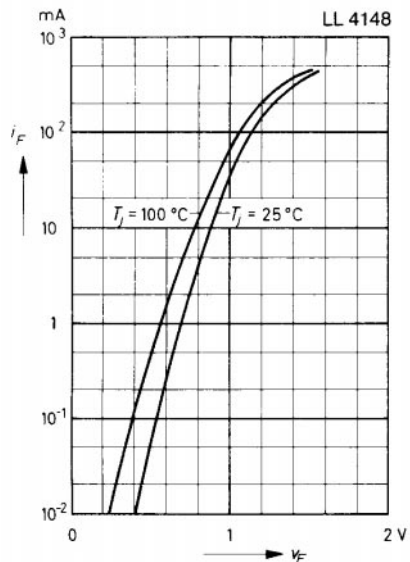


Admissible power dissipation versus ambient temperature

Valid provided that electrodes are kept at ambient temperature

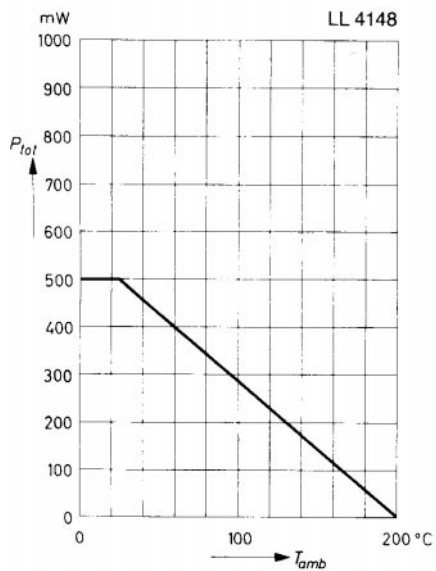


Relative capacitance versus reverse voltage

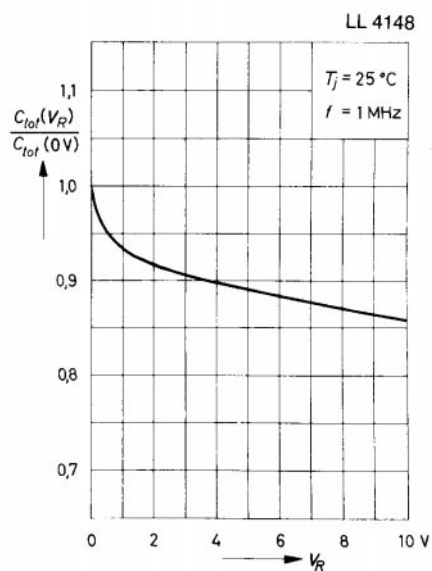

RATINGS AND CHARACTERISTIC CURVES

Leakage current versus junction temperature

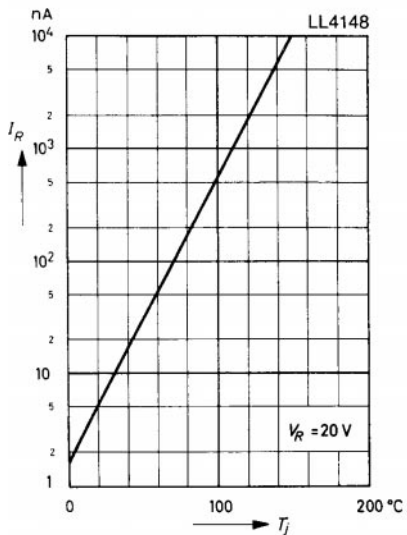

Admissible repetitive peak forward current versus pulse duration

Valid provided that electrodes are kept at ambient temperature

