


FEATURES

- **EPIC™ (Enhanced-Performance Implanted CMOS) Submicron Process**
- **Useful for Jumperless Configuration of PC Motherboard**
- **Inputs Accept Voltages to 5.5 V**
- **MUX OUT Signals are 2.5-V Outputs**
- **NON-MUXED OUT Signal is a 3.3-V Output**
- **Minimum of 1000 Write Cycles**
- **Minimum of 10 Years Data Retention**
- **Package Options Include Plastic Small-Outline (D), Shrink Small-Outline (DB), and Thin Shrink Small-Outline (PW) Packages**

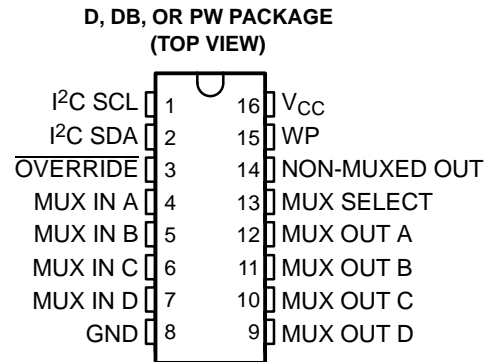

DESCRIPTION/ORDERING INFORMATION

This 4-bit 1-of-2 multiplexer with I²C input interface is designed for 3-V to 3.6-V V_{CC} operation.

The PCA8550 is designed to multiplex four bits of data from parallel inputs or from I²C input data stored in a nonvolatile register. An additional bit of register output also is provided, which is latched to prevent changes in the output value during the write cycle. The factory default for the contents of the register is all low. These stored values can be read from, or written to, using the I²C bus. The ability to control writing to the register is provided by the write protect (WP) input. The override (OVERRIDE) input forces all the register outputs to a low.

This device provides a fast-mode (400 kbit/s) or standard-mode (100 kbit/s) I²C serial interface for data input and output. The implementation is as a slave. The device address is specified in the I²C interface definition table. Both of the I²C Schmitt-trigger inputs (SCL and SDA) provide integrated pullup resistors and are 5-V tolerant.

The PCA8550 requires a monotonic power-supply ramp at start-up in the region of 1.1 V to 2.5 V. The nonvolatile registers and I²C state machine initialize to their default states after this V_{CC} level is passed.

The PCA8550 is characterized for operation from 0°C to 70°C.

ORDERING INFORMATION

T _A	PACKAGE ⁽¹⁾		ORDERABLE PART NUMBER	TOP-SIDE MARKING
0°C to 70°C	SOIC – D	Tube of 40	PCA8550D	PCA8550
		Reel of 2500	PCA8550DR	
	SSOP – DB	Reel of 2000	PCA8550DBR	
	TSSOP – PW	Reel of 2000	PCA8550PWR	

(1) Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.


EPIC is a trademark of Texas Instruments.

FUNCTION TABLE

INPUTS		OUTPUTS	
MUX SELECT	OVERRIDE	MUX OUT	NON-MUXED OUT
L	L	L	L
L	H	Nonvolatile register	Nonvolatile register
H	X	MUX IN	Latched NON-MUXED OUT ⁽¹⁾

(1) The latched NON-MUXED OUT state is the value present on the NON-MUXED OUT output at the time the MUX SELECT input transitions from the low to the high state.

LOGIC DIAGRAM (POSITIVE LOGIC)

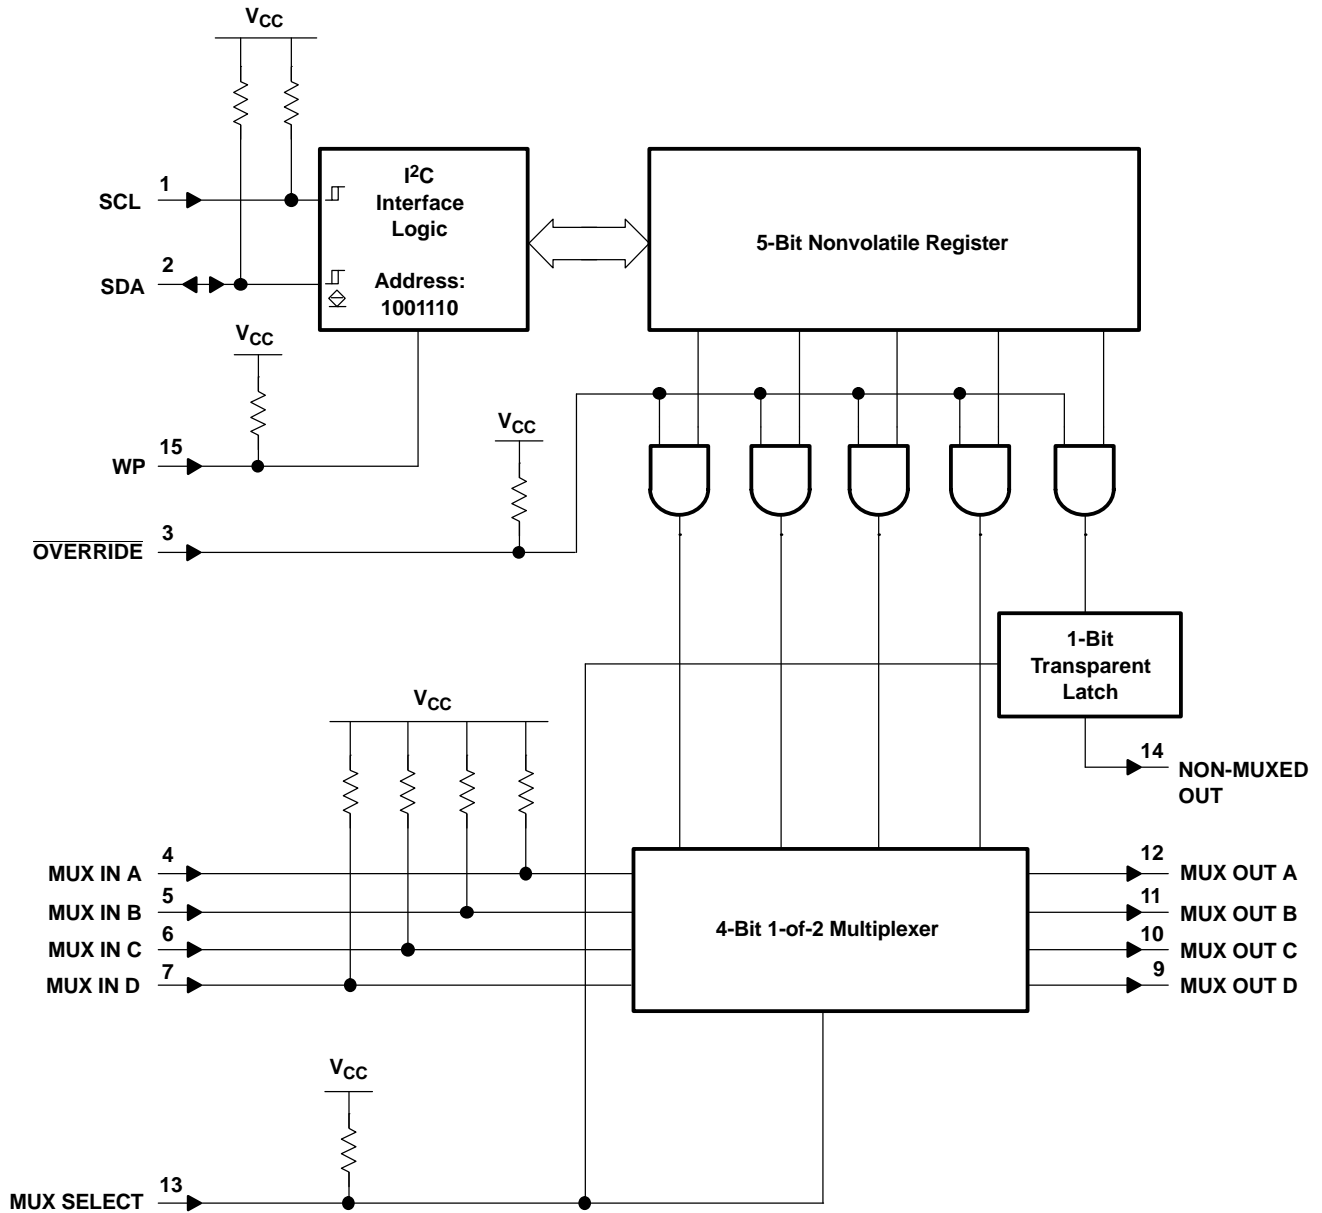

I²C Interface

I²C communication with this device is initiated by a master sending a start condition, a high-to-low transition on the serial data (SDA) input/output while the serial clock (SCL) input is high. After the start condition, the device address byte is sent, MSB first, including the data-direction bit (R/W). This device does not respond to the general call address. After receiving the valid address byte, this device responds with an acknowledge, a low on the SDA input/output during the high of the acknowledge-related clock pulse.

The data byte follows the address acknowledge. If the R/W bit is high, the data from this device are the values read from the nonvolatile register. If the R/W bit is low, the data are from the master, to be written into the register. A valid data byte is one in which the three high-order bits are low. The first valid data byte that is received is written into the register, following the stop condition. If an invalid data byte is received, it is acknowledged, but is not written into the register. The data byte is followed by an acknowledge sent from this device. If other data bytes are sent from the master, following the acknowledge, they are ignored by this device.

A stop condition, a low-to-high transition on the SDA input/output while the SCL input is high, is sent by the master. If the WP input is low during the falling edge of the first valid data byte acknowledge on the SCL input and the R/W bit is low, the stop condition causes the I²C interface logic to write the data byte value into the nonvolatile register. Data are written only if complete bytes are received and acknowledged. Writing to the register takes time (t_{wr}), during which the device does not respond to its slave address. If the WP input is high, the I²C interface logic does not write to the register.

I²C Interface Definition Table

BYTE	BIT							
	7 (MSB)	6	5	4	3	2	1	0 (LSB)
Address	H	L	L	H	H	H	L	R/W
Data	L	L	L	NON-MUXED OUT	MUX OUT D	MUX OUT C	MUX OUT B	MUX OUT A

Absolute Maximum Ratings⁽¹⁾

over operating free-air temperature range (unless otherwise noted)

		MIN	MAX	UNIT	
V _{CC}	Supply voltage range	-0.5	6.5	V	
V _I	Input voltage range ⁽²⁾	-0.5	6.5	V	
V _O	Output voltage range	SDA ⁽²⁾	-0.5	6.5	
		MUX OUT outputs ⁽²⁾	-0.5	2.9	
		NON-MUXED OUT output ⁽²⁾⁽³⁾	-0.5	V _{CC} + 0.5	
I _{IK}	Input clamp current	V _I < 0		-50	mA
I _{OK}	Output clamp current	V _O < 0 or V _O > V _{CC} ⁽³⁾		-50, +10	mA
I _{I_{OK}}	Input/output clamp current	V _O < 0		-50	mA
I _O	Continuous output current	V _O = 0 to V _{CC} ⁽³⁾		±15	mA
	Continuous current through V _{CC} or GND			±30	mA
θ _{JA}	Package thermal impedance ⁽⁴⁾	D package		113	°C/W
		DB package		131	
		PW package		149	
T _{stg}	Storage temperature range	-65	85	°C	

- (1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) The input negative-voltage and output voltage ratings may be exceeded if the input and output current ratings are observed.
- (3) The value of V_{CC} is provided in the recommended operating conditions table.
- (4) The package thermal impedance is calculated in accordance with JESD 51.

PCA8550
NONVOLATILE 5-BIT REGISTER
WITH I²C INTERFACE

SCPS050C—MARCH 1999—REVISED MAY 2005

Recommended Operating Conditions

			MIN	MAX	UNIT
V _{CC}	Supply voltage		3	3.6	V
V _{IH}	High-level input voltage	SCL, SDA	2.7	4	V
		ÖVERRIDE, MUX IN, MUX SELECT, WP	2	4	
V _{IL}	Low-level input voltage	SCL, SDA	–0.5	0.9	V
		ÖVERRIDE, MUX IN, MUX SELECT, WP	–0.5	0.8	
I _{OH}	High-level output current	MUX OUT, NON-MUXED OUT		–2	mA
I _{OL}	Low-level output current	SDA		6	mA
		MUX OUT, NON-MUXED OUT		2	
Δt/Δv	Input transition rise or fall rate	ÖVERRIDE, MUX IN, MUX SELECT, WP		10	ns/V
T _A	Operating free-air temperature		0	70	°C

Electrical Characteristics

over recommended operating free-air temperature range, V_{CC} = 3.3 V ± 0.3 V (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	MAX	UNIT
V _{IK}	Input diode clamp voltage	I _I = –18 mA	–1.5		V
V _{hys} ⁽¹⁾	SCL, SDA		0.19		V
V _{OH}	MUX OUT	I _{OH} = –100 μA	2	2.625	V
		I _{OH} = –1 mA	1.7	2.625	
	NON-MUXED OUT	I _{OH} = –100 μA	2.4	3.6	
		I _{OH} = –2 mA	2	3.6	
V _{OL}	MUX OUT	I _{OL} = 100 μA	–0.3	0.4	V
		I _{OL} = 2 mA	–0.3	0.7	
	NON-MUXED OUT	I _{OL} = 100 μA	–0.5	0.4	
		I _{OL} = 2 mA	–0.5	0.7	
	SDA	I _{OL} = 3 mA		0.4	
		I _{OL} = 6 mA		0.6	
I _{IH}	SCL, SDA	V _{IH} = 2.4 V	–1.5	–12	μA
	ÖVERRIDE, MUX SELECT, WP		–20	–100	
	MUX IN		–0.166	–0.75	mA
I _{IL}	SCL, SDA	V _{IL} = 0.4 V	–7	–32	μA
	ÖVERRIDE, MUX SELECT, WP		–86	–267	
	MUX IN		–0.72	–2	mA
I _{CC}	During read or write cycle	V _I = 0 to V _{CC} , I _O = 0, V _{CC} = 3.3 V		10	mA
	Not during read or write cycle	V _I = V _{CC} , I _O = 0		500	μA
C _i		V _I = V _{CC} or GND		10	pF

(1) V_{hys} is the hysteresis of Schmitt-trigger inputs.

Nonvolatile Storage Specifications

PARAMETER	SPECIFICATIONS
Write time (t _{wr})	10 ms, typical
Memory-cell data retention	10 years, minimum
Maximum number of memory-cell write cycles	1000 cycles, minimum

I²C Interface Timing Requirements

over recommended operating free-air temperature range (unless otherwise noted) (see Figure 1)

		$V_{CC} = 3.3\text{ V} \pm 0.3\text{ V}$		UNIT
		MIN	MAX	
f_{scl}	I ² C clock frequency	10	400	kHz
t_{sch}	I ² C clock high time	600		ns
t_{scl}	I ² C clock low time	1.3		μs
t_{sp}	I ² C spike time	0	50	ns
t_{sds}	I ² C serial data setup time	100		ns
t_{sdh}	I ² C serial data hold time	0	900	ns
t_{icr}	I ² C input rise time	20	300	ns
t_{icf}	I ² C input fall time	20	300	ns
t_{ocf}	I ² C output fall time (10-pF to 400-pF bus)	$20 + 0.1 C_b^{(1)}$	250	ns
t_{buf}	I ² C bus free time between stop and start	1.3		μs
t_{sts}	I ² C start or repeated start condition setup	600		ns
t_{sth}	I ² C start or repeated start condition hold	600		ns
t_{sps}	I ² C stop condition setup	600		ns
$C_b^{(1)}$	I ² C bus capacitive load		400	pF



(1) C_b = capacitance of one bus line in pF

Switching Characteristics

over recommended operating free-air temperature range (unless otherwise noted) (see Figure 2)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$V_{CC} = 3.3\text{ V} \pm 0.3\text{ V}$		UNIT
			MIN	MAX	
t_{mpd}	Mux input to output propagation delay	MUX IN		20	ns
t_{sov}	MUX SELECT to output valid	MUX SELECT		22	ns
t_{ovn}	$\overline{\text{OVERRIDE}}$ to NON-MUXED OUT output delay	$\overline{\text{OVERRIDE}}$		15	ns
t_{ovm}	$\overline{\text{OVERRIDE}}$ to MUX OUT output delay	$\overline{\text{OVERRIDE}}$		25	ns
t_{su}	Setup time	WP		30	ns
t_h	Hold time	WP		120	ns
t_r	Output rise time		1	3	ns/V
t_f	Output fall time		1	3	ns/V


PARAMETER MEASUREMENT INFORMATION

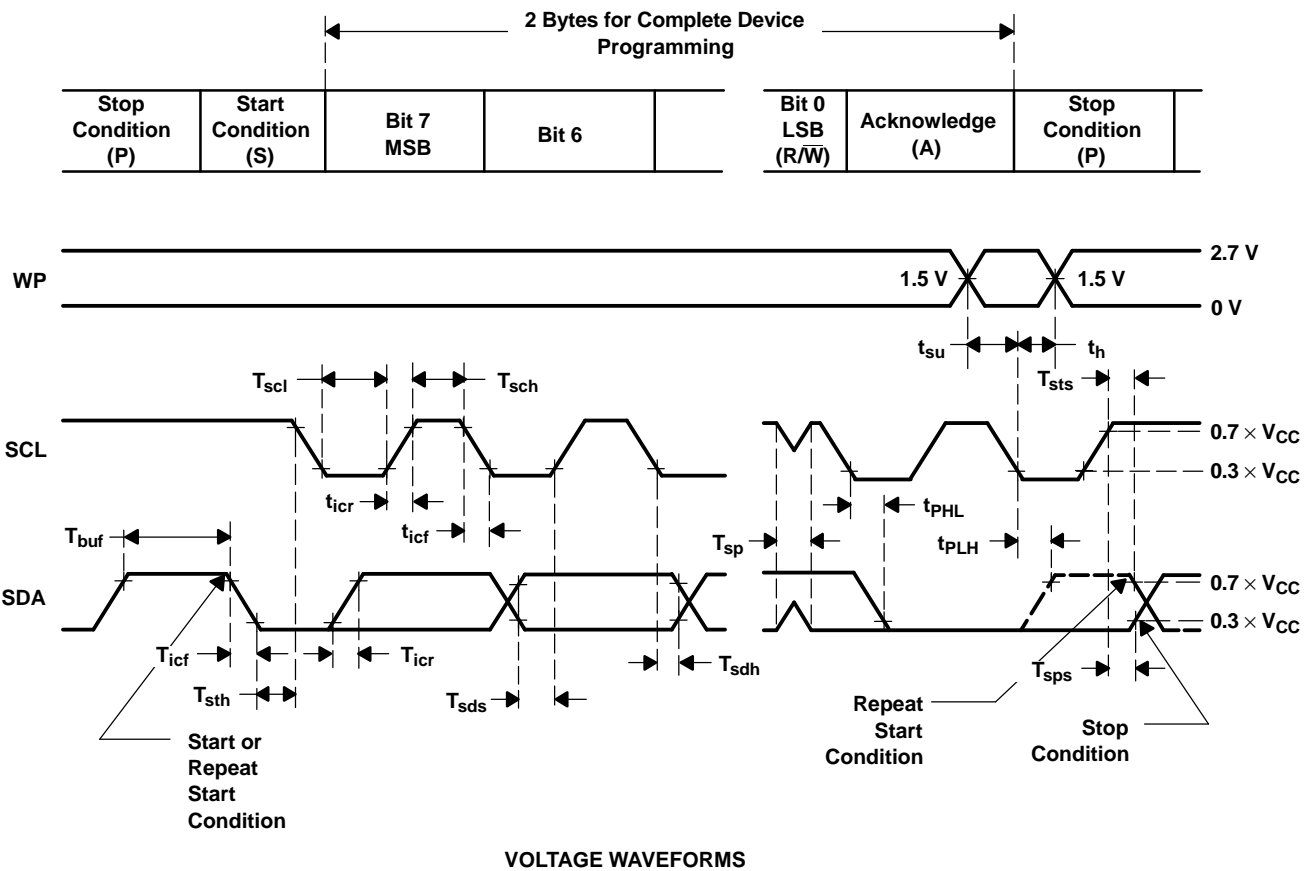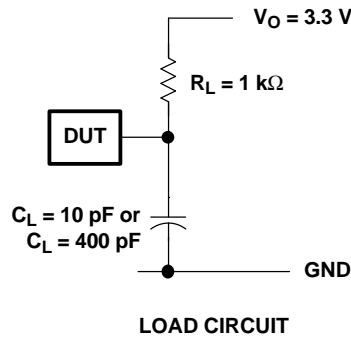

BYTE	DESCRIPTION
1	I ² C address
2	Nonvolatile register data

Figure 1. I²C Interface Load Circuit and Voltage Waveforms

PARAMETER MEASUREMENT INFORMATION

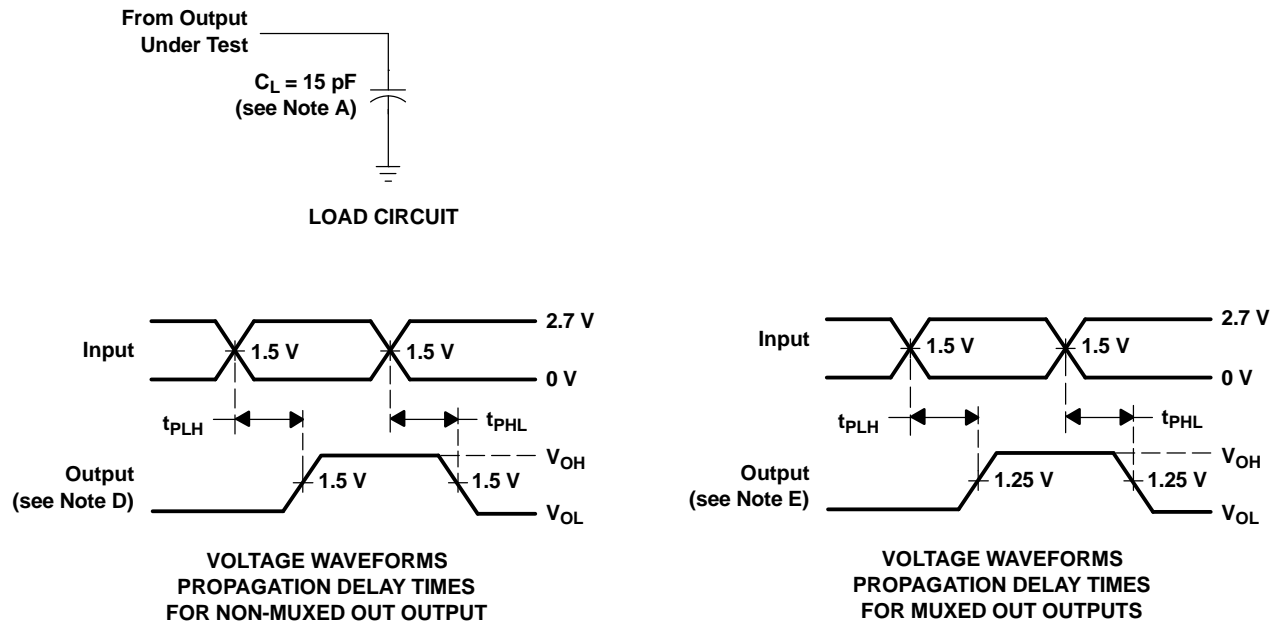

- NOTES: A. C_L includes probe and jig capacitance.
 B. All input pulses are supplied by generators having the following characteristics: $PRR \leq 10$ MHz, $Z_O = 50 \Omega$, $t_r \leq 2.5$ ns, $t_f \leq 2.5$ ns.
 C. The outputs are measured one at a time, with one transition per measurement.
 D. t_{PLH} and t_{PHL} are the same as t_{sov} and t_{ovn} .
 E. t_{PLH} and t_{PHL} are the same as t_{mpd} , t_{sov} , and t_{ovm} .

Figure 2. Load Circuit and Voltage Waveforms

PACKAGING INFORMATION

Orderable Device	Status ⁽¹⁾	Package Type	Package Drawing	Pins	Package Qty	Eco Plan ⁽²⁾	Lead/Ball Finish	MSL Peak Temp ⁽³⁾
PCA8550D	ACTIVE	SOIC	D	16		TBD	Call TI	Call TI
PCA8550DBR	ACTIVE	SSOP	DB	16		TBD	Call TI	Call TI
PCA8550DBRE4	ACTIVE	SSOP	DB	16		TBD	Call TI	Call TI
PCA8550DE4	ACTIVE	SOIC	D	16		TBD	Call TI	Call TI
PCA8550DR	ACTIVE	SOIC	D	16		TBD	Call TI	Call TI
PCA8550DRE4	ACTIVE	SOIC	D	16		TBD	Call TI	Call TI
PCA8550PWR	ACTIVE	TSSOP	PW	16		TBD	Call TI	Call TI
PCA8550PWRE4	ACTIVE	TSSOP	PW	16		TBD	Call TI	Call TI

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS) or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

DB (R-PDSO-G**)

PLASTIC SMALL-OUTLINE

28 PINS SHOWN



- NOTES: A. All linear dimensions are in millimeters.
 B. This drawing is subject to change without notice.
 C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.
 D. Falls within JEDEC MO-150

PW (R-PDSO-G**)

PLASTIC SMALL-OUTLINE PACKAGE

14 PINS SHOWN



4040064/F 01/97

- NOTES: A. All linear dimensions are in millimeters.
 B. This drawing is subject to change without notice.
 C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.
 D. Falls within JEDEC MO-153

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DSP	dsp.ti.com	Broadband	www.ti.com/broadband
Interface	interface.ti.com	Digital Control	www.ti.com/digitalcontrol
Logic	logic.ti.com	Military	www.ti.com/military
Power Mgmt	power.ti.com	Optical Networking	www.ti.com/opticalnetwork
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
Low Power Wireless	www.ti.com/lpw	Telephony	www.ti.com/telephony
		Video & Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments
Post Office Box 655303 Dallas, Texas 75265