


Quad General Purpose Transistors

NPN Silicon



MMPQ2222
MMPQ2222A*

*Motorola Preferred Device

CASE 751B-05, STYLE 4
SO-16

MAXIMUM RATINGS

Rating	Symbol	MMPQ2222	MMPQ2222A	Unit
Collector–Emitter Voltage	V_{CEO}	30	40	Vdc
Collector–Base Voltage	V_{CB}	60	75	Vdc
Emitter–Base Voltage	V_{EB}	5.0		Vdc
Collector Current — Continuous	I_C	500		mAdc
		Each Transistor	Four Transistors Equal Power	
Total Power Dissipation @ $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D	0.52 4.2	1.0 8.0	Watts mW/ $^\circ\text{C}$
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	0.8 6.4	2.4 19.2	Watts mW/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–55 to +150		$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
----------------	--------	-----	-----	-----	------

OFF CHARACTERISTICS

Collector–Emitter Breakdown Voltage ⁽¹⁾ ($I_C = 10 \text{ mAdc}, I_E = 0$)	MMPQ2222 MMPQ2222A	$V_{(BR)CEO}$	30 40	— —	— —	Vdc
Collector–Base Breakdown Voltage ($I_C = 10 \mu\text{Adc}, I_E = 0$)	MMPQ2222 MMPQ2222A	$V_{(BR)CBO}$	60 75	— —	— —	Vdc
Emitter–Base Breakdown Voltage ($I_B = 10 \mu\text{Adc}, I_C = 0$)		$V_{(BR)EBO}$	5.0 —	— —	— —	Vdc
Collector Cutoff Current ($V_{CB} = 50 \text{ Vdc}, I_E = 0$) ($V_{CB} = 60 \text{ Vdc}, I_E = 0$)	MMPQ2222 MMPQ2222A	I_{CBO}	— —	— —	50 10	nAdc
Emitter Cutoff Current ($V_{EB} = 3.0 \text{ Vdc}, I_C = 0$)		I_{EBO}	—	—	100	nAdc

1. Pulse Test: Pulse Width $\leq 300 \mu\text{s}$; Duty Cycle $\leq 2.0\%$.

Thermal Clad is a trademark of the Bergquist Company

Preferred devices are Motorola recommended choices for future use and best overall value.

MMPQ2222 MMPQ2222A

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted) (Continued)

Characteristic	Symbol	Min	Typ	Max	Unit	
ON CHARACTERISTICS						
DC Current Gain ⁽¹⁾ ($I_C = 100\ \mu\text{A}$, $V_{CE} = 10\ \text{V}$) ($I_C = 1.0\ \text{mA}$, $V_{CE} = 10\ \text{V}$) ($I_C = 10\ \text{mA}$, $V_{CE} = 10\ \text{V}$) ($I_C = 150\ \text{mA}$, $V_{CE} = 10\ \text{V}$) ($I_C = 300\ \text{mA}$, $V_{CE} = 10\ \text{V}$) ($I_C = 500\ \text{mA}$, $V_{CE} = 10\ \text{V}$) ($I_C = 150\ \text{mA}$, $V_{CE} = 1.0\ \text{V}$)	MMPQ2222A MMPQ2222A MMPQ2222 MMPQ2222A MMPQ2222 MMPQ2222A MMPQ2222 MMPQ2222A MMPQ2222A	h_{FE}	35 50 75 75 100 100 30 40 50	— — — — — — — — —	— — — — — 300 — — —	—
Collector–Emitter Saturation Voltage ⁽¹⁾ ($I_C = 150\ \text{mAdc}$, $I_B = 15\ \text{mAdc}$) ($I_C = 300\ \text{mAdc}$, $I_B = 30\ \text{mAdc}$) ($I_C = 500\ \text{mAdc}$, $I_B = 50\ \text{mAdc}$)	MMPQ2222 MMPQ2222A MMPQ2222 MMPQ2222A	$V_{CE(sat)}$	— — — —	— — — —	0.4 0.3 1.6 1.0	Vdc
Base–Emitter Saturation Voltage ⁽¹⁾ ($I_C = 150\ \text{mAdc}$, $I_B = 15\ \text{mAdc}$) ($I_C = 300\ \text{mAdc}$, $I_B = 30\ \text{mAdc}$) ($I_C = 500\ \text{mAdc}$, $I_B = 50\ \text{mAdc}$)	MMPQ2222 MMPQ2222A MMPQ2222 MMPQ2222A	$V_{BE(sat)}$	— — — —	— — — —	1.3 1.2 2.6 2.0	Vdc

DYNAMIC CHARACTERISTICS

Current–Gain — Bandwidth Product ⁽¹⁾ ($I_C = 20\ \text{mAdc}$, $V_{CE} = 20\ \text{Vdc}$, $f = 100\ \text{MHz}$)	f_T	200	350	—	MHz
Output Capacitance ($V_{CB} = 10\ \text{Vdc}$, $I_E = 0$, $f = 1.0\ \text{MHz}$)	C_{ob}	—	4.5	—	pF
Input Capacitance ($V_{EB} = 0.5\ \text{Vdc}$, $I_C = 0$, $f = 1.0\ \text{MHz}$)	C_{ib}	—	17	—	pF

SWITCHING CHARACTERISTICS

Turn–On Time ($V_{CC} = 30\ \text{Vdc}$, $V_{BE(off)} = -0.5\ \text{Vdc}$, $I_C = 150\ \text{mAdc}$, $I_{B1} = 15\ \text{mAdc}$)	t_{on}	—	25	—	ns
Turn–Off Time ($V_{CC} = 30\ \text{Vdc}$, $I_C = 150\ \text{mAdc}$, $I_{B1} = I_{B2} = 15\ \text{mAdc}$)	t_{off}	—	250	—	ns


1. Pulse Test: Pulse Width $\leq 300\ \mu\text{s}$; Duty Cycle $\leq 2.0\%$.

INFORMATION FOR USING THE SO-16 SURFACE MOUNT PACKAGE

MINIMUM RECOMMENDED FOOTPRINT FOR SURFACE MOUNTED APPLICATIONS

Surface mount board layout is a critical portion of the total design. The footprint for the semiconductor packages must be the correct size to insure proper solder connection

interface between the board and the package. With the correct pad geometry, the packages will self align when subjected to a solder reflow process.

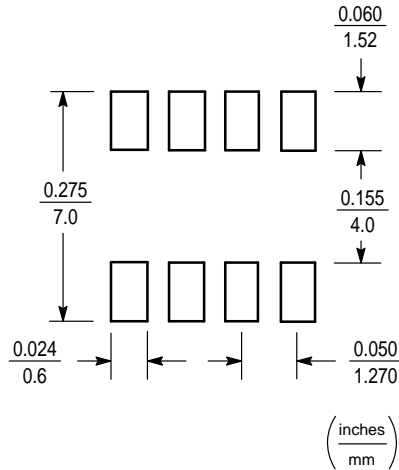

SO-16

SO-16 POWER DISSIPATION

The power dissipation of the SO-16 is a function of the pad size. This can vary from the minimum pad size for soldering to a pad size given for maximum power dissipation. Power dissipation for a surface mount device is determined by $T_{J(max)}$, the maximum rated junction temperature of the die, $R_{\theta JA}$, the thermal resistance from the device junction to ambient, and the operating temperature, T_A . Using the values provided on the data sheet for the SO-16 package, P_D can be calculated as follows:

$$P_D = \frac{T_{J(max)} - T_A}{R_{\theta JA}}$$

The values for the equation are found in the maximum ratings table on the data sheet. Substituting these values into the equation for an ambient temperature T_A of 25°C, one can calculate the power dissipation of the device which in this case is 1.0 watts.

$$P_D = \frac{150^\circ\text{C} - 25^\circ\text{C}}{125^\circ\text{C/W}} = 1.0 \text{ watts}$$

The 125°C/W for the SO-16 package assumes the use of the recommended footprint on a glass epoxy printed circuit board to achieve a power dissipation of 1.0 watts. There are other alternatives to achieving higher power dissipation from the SO-16 package. Another alternative would be to use a ceramic substrate or an aluminum core board such as Thermal Clad™. Using a board material such as Thermal Clad, an aluminum core board, the power dissipation can be doubled using the same footprint.


SOLDERING PRECAUTIONS

The melting temperature of solder is higher than the rated temperature of the device. When the entire device is heated to a high temperature, failure to complete soldering within a short time could result in device failure. Therefore, the following items should always be observed in order to minimize the thermal stress to which the devices are subjected.

- Always preheat the device.
- The delta temperature between the preheat and soldering should be 100°C or less.*
- When preheating and soldering, the temperature of the leads and the case must not exceed the maximum temperature ratings as shown on the data sheet. When using infrared heating with the reflow soldering method, the difference shall be a maximum of 10°C.
- The soldering temperature and time shall not exceed 260°C for more than 10 seconds.
- When shifting from preheating to soldering, the maximum temperature gradient shall be 5°C or less.
- After soldering has been completed, the device should be allowed to cool naturally for at least three minutes. Gradual cooling should be used as the use of forced cooling will increase the temperature gradient and result in latent failure due to mechanical stress.
- Mechanical stress or shock should not be applied during cooling.

* Soldering a device without preheating can cause excessive thermal shock and stress which can result in damage to the device.

PACKAGE DIMENSIONS

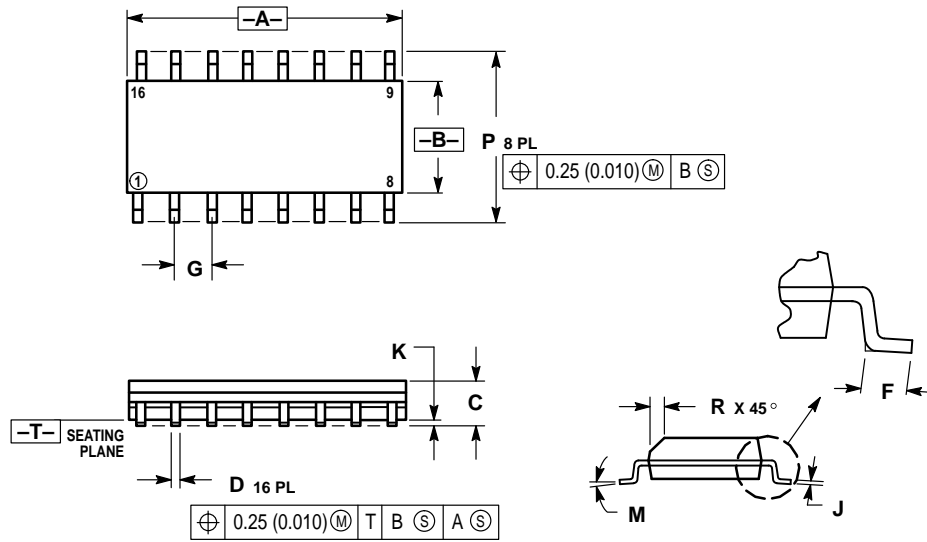

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: MILLIMETER.
 3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
 4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
 5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	9.80	10.00	0.386	0.393
B	3.80	4.00	0.150	0.157
C	1.35	1.75	0.054	0.068
D	0.35	0.49	0.014	0.019
F	0.40	1.25	0.016	0.049
G	1.27 BSC		0.050 BSC	
J	0.19	0.25	0.008	0.009
K	0.10	0.25	0.004	0.009
M	0°	7°	0°	7°
P	5.80	6.20	0.229	0.244
R	0.25	0.50	0.010	0.019

- STYLE 4:
- PIN 1: COLLECTOR, DYE #1
2. COLLECTOR, #1
 3. COLLECTOR, #2
 4. COLLECTOR, #2
 5. COLLECTOR, #3
 6. COLLECTOR, #3
 7. COLLECTOR, #4
 8. COLLECTOR, #4
 9. BASE, #4
 10. EMITTER, #4
 11. BASE, #3
 12. EMITTER, #3
 13. BASE, #2
 14. EMITTER, #2
 15. BASE, #1
 16. EMITTER, #1

CASE 751B-05
SO-16
ISSUE J

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:
USA/EUROPE/Locations Not Listed: Motorola Literature Distribution;
 P.O. Box 20912; Phoenix, Arizona 85036. 1-800-441-2447 or 602-303-5454

JAPAN: Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, 6F Seibu-Butsuryu-Center,
 3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 03-81-3521-8315

MFAX: RMFA0@email.sps.mot.com – TOUCHTONE 602-244-6609
INTERNET: http://Design-NET.com

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

