

# GL514/GL513F

## TO-18 Type Infrared Emitting Diode

### ■ Features

1. Output : **GL514**  $\Phi_e$  MIN. 3.31mW at  $I_F = 100mA$   
**GL513F**  $\Phi_e$  MIN. 1.44mW at  $I_F = 100mA$
2. Beam angle : **GL514**  $\Delta\theta$  : TYP.  $\pm 7^\circ$   
**GL513F**  $\Delta\theta$  : TYP.  $\pm 50^\circ$
3. To-18 type standard package
4. High reliability, long operation life

### ■ Applications

1. Optoelectronic switches
2. Smoke detectors
3. Infrared applied systems

### ■ Absolute Maximum Ratings (Ta = 25°C)

Parameter	Symbol	Rating	Unit
Power dissipation	P	250	mW
Forward current	I <sub>F</sub>	150	mA
* <sup>1</sup> Peak forward current	I <sub>FM</sub>	2	A
Reverse voltage	V <sub>R</sub>	6	V
Operating temperature	T <sub>opr</sub>	- 40 to + 125	°C
Storage temperature	T <sub>stg</sub>	- 55 to + 125	°C
* <sup>2</sup> Soldering temperature	T <sub>sol</sub>	260	°C

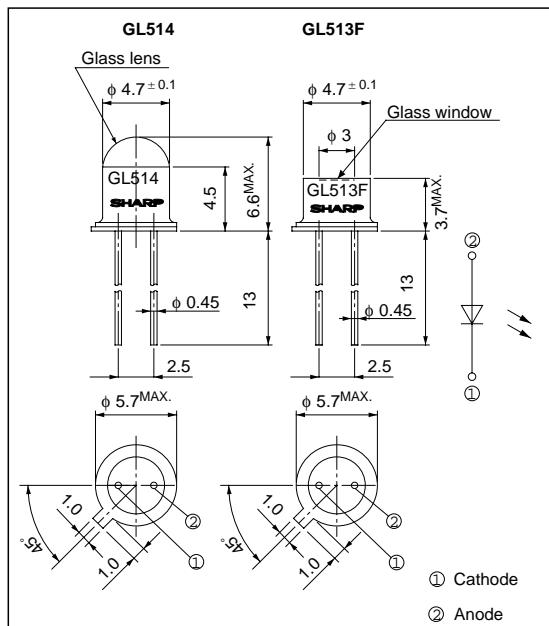
\*1 Pulse width <= 200 μs

Duty ratio = 0.01

\*2 For 10 seconds at the position of 1.3mm from the bottom face of can package.

### ■ Outline Dimensions

(Unit : mm)



### ■ Electro-optical Characteristics (Ta = 25°C)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Forward voltage	V <sub>F</sub>	I <sub>F</sub> = 100mA	-	1.35	1.6	V
Peak forward voltage	V <sub>FM</sub>	I <sub>FM</sub> = 1.5A	-	2.75	4.0	V
Reverse current	I <sub>R</sub>	V <sub>R</sub> = 5V	-	-	100	μA
Terminal capacitance	C <sub>t</sub>	V = 0, f = 1MHz	-	70	-	pF
* <sup>3</sup> Radiant flux	<b>GL514</b> <b>GL513F</b>	I <sub>F</sub> = 100mA	3.31	5.35	10.0	mW
			1.44	2.88	-	mW
Peak emission wavelength	λ <sub>p</sub>	I <sub>F</sub> = 100mA	-	950	-	nm
Half intensity wavelength	Δλ	I <sub>F</sub> = 100mA	-	45	-	nm

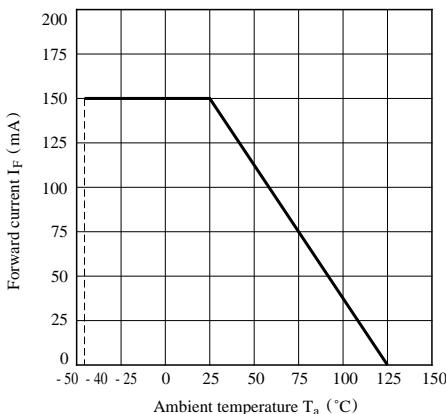
<sup>\*</sup>In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that occur in equipment using any of SHARP's devices, shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest version of the device specification sheets before using any SHARP's device.."

### \*3 Classification Table of Radiant Flux

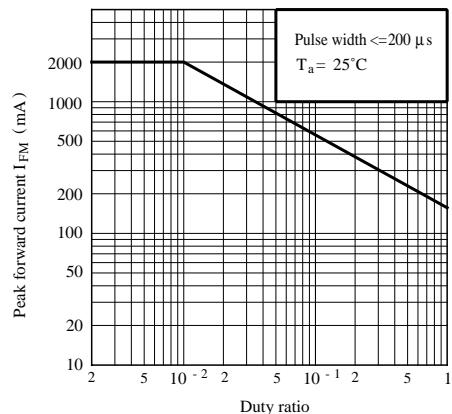
Model No.	Rank Mark	$\Phi_e$ (mW)
<b>GL514A</b>	A	5.35 to 10.0
<b>GL514</b>	-	3.31 to 10.0

at  $I_F = 100\text{mA}$ ,  $T_a = 25^\circ\text{C}$

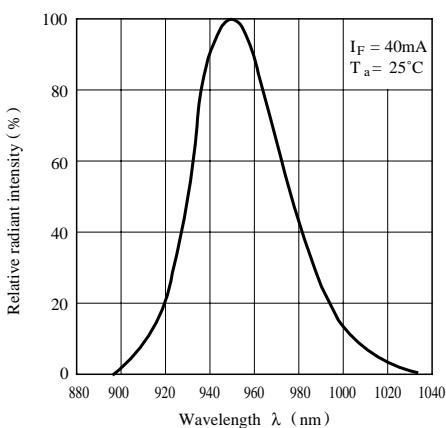
**Fig. 1 Forward Current vs.  
Ambient Temperature**



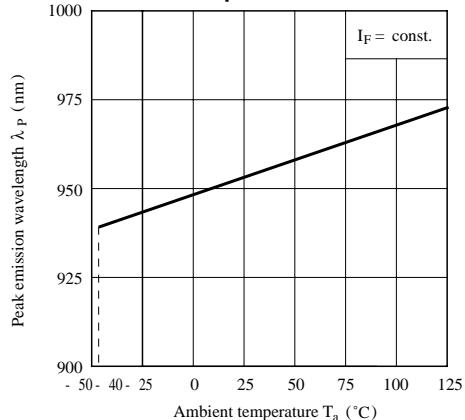
**Fig. 2 Peak Forward Current vs. Duty Ratio**

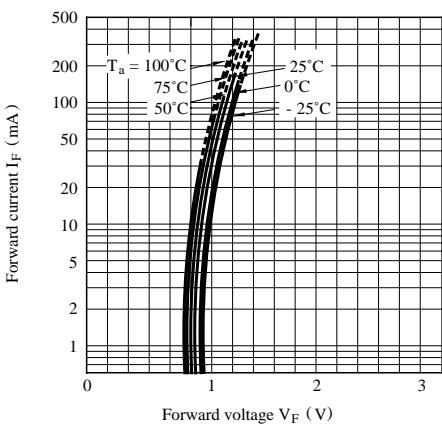
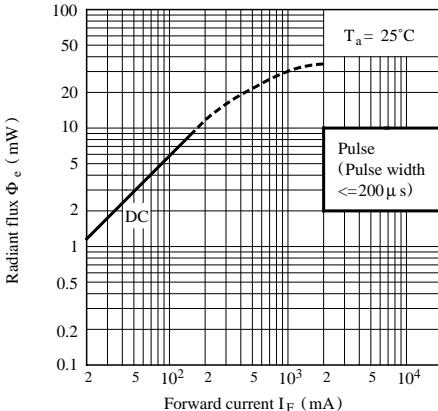
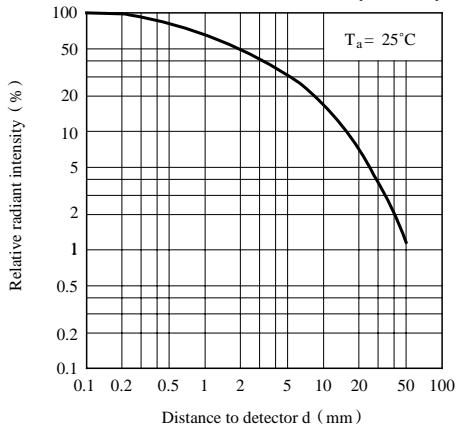
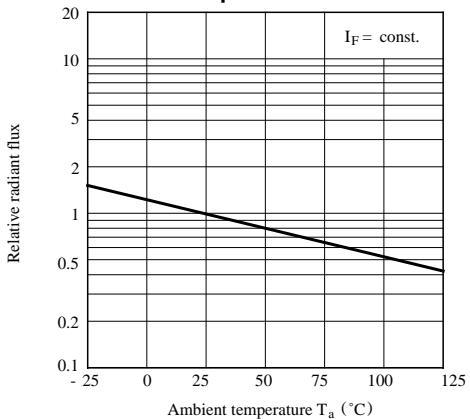
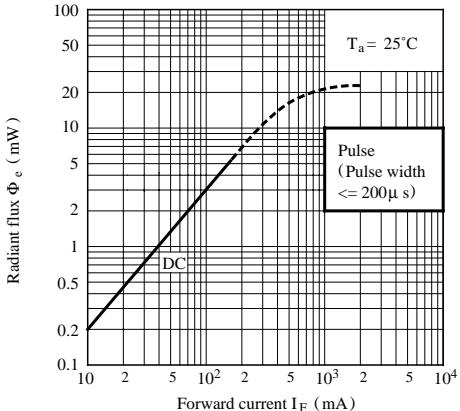
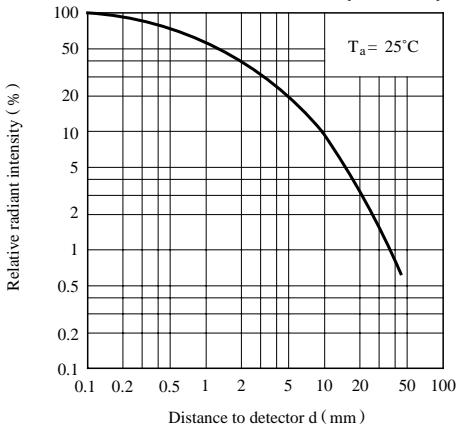


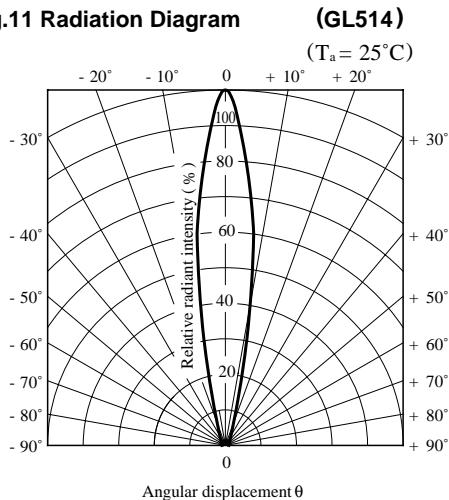
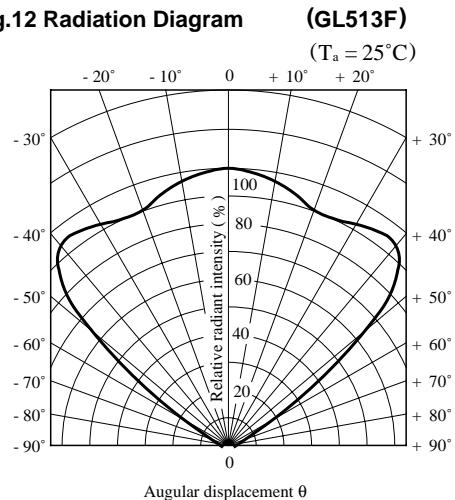
**Fig. 3 Spectral Distribution**



**Fig. 4 Peak Emission Wavelength vs.  
Ambient Temperature**



**Fig. 5 Forward Current vs. Forward Voltage****Fig. 7 Radiant Flux vs. Forward Current (GL514)****Fig. 9 Relative Radiant Intensity vs. Distance (GL514)****Fig. 6 Relative Radiant Flux vs. Ambient Temperature****Fig. 8 Radiant Flux vs. Forward Current (GL513F)****Fig. 10 Relative Radiant Intensity vs. Distance (GL513F)**

**Fig.11 Radiation Diagram****Fig.12 Radiation Diagram**

- Please refer to the chapter “Precautions for Use.”