SGC251BS


Surface Mount Schottky Rectifier Reverse Voltage 100V Forward Current 25A

Features

- · Heatsink design
- Schottky barrier diodes
- · Low forward voltage drop
- · Low leakage current
- Solder dip 260 °C, 10 s
- Low profile typical height of 1.1 mm
- Moisture sensitivity: level 1, per J-STD-020
- Halogen-free according to IEC 61249-2-21 definition
- High temperature soldering guaranteed: 260°C/10 seconds



eSGC (TO-277)



Typical Applications

For low voltage high frequency inverters, DC/DC converters and polarity protection application.

Maximum Ratings (TA = 25 °C unless otherwise noted)						
Parameter	Symbol	SGC251BS	Unit			
Maximum repetitive peak reverse voltage	VRRM	100	V			
Maximum RMS voltage	VRMS	70	V			
Maximum DC blocking voltage	VDC	100	V			
Maximum average forward rectified current	IF(AV) ¹⁾	8.0	А			
	IF(AV) ²⁾	25.0				
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	IFSM	250	А			
Operating junction and storage temperature range	TJ, TSTG	-55 to +150	°C			

Electrical Characteristics (TA = 25 °C unless otherwise noted)								
Parameter	Test Conditions		Symbol	MAX.	Unit			
Maximum instantaneous forward voltage	I _F =2A	T 0500	V _F	0.42	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \			
	I _F =25A	T _A =25°C		0.70	Volts			
Maximum DC reverse current at rated DC	VD 400V	T _A =25°C	- I _R	250	uA			
blocking voltage	VR=100V	T _A =100°C		30	mA			
Typical junction capacitance	4.0 V, 1 MHz		CJ	1.78	nF			
Typical thermal resistance	juntion to ambient		R _{eJA} 1)	45	°C/W			
	juntion to mount		R _{0.IM} ²⁾	10	°C/W			

Notes,1)Thermal resistance RθJA is junction to lead,mounted on P.C.B with 30*30mm copper pad area

www.goodark.com 1/4 2015.01-Rev.A

²⁾Thermal resistance $R_{\mbox{\tiny BJM}}$ is junction to mount.Mounted on aluminum substrate P.C.B



Ratings and Characteristics Curves

 $(TA = 25^{\circ}C \text{ unless otherwise noted})$




Figure 1.Maximum Non-Repetitive Peak Forward Surge Current




Figure 3. Typical Junction Capacitance




Figure 5. Forward Current Derating Curve




Figure 2. Typical Reverse Characteristics





Figure 4. Typical Instantaneous Forward Characteristics





Package Outline Dimensions

in inches (millimeters)










Soldering footprint




Packing Information

Packing quantities:

5000 pcs/Reel, 12mm Tape, 13" Reel

Tape & Reel Specification

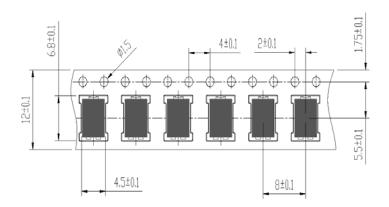



SGC251BS

Surface Mount Schottky Rectifier Reverse Voltage 100V Forward Current 25A

Disclaimers

These materials are intended as a reference to assist our customers in the selection of the Suzhou Good-Ark product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Suzhou Good-Ark Electronics Co., Ltd.or a third party.

Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Suzhou Good-Ark Electronics Co., Ltd. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Suzhou Good-Ark Electronics Co., Ltd. for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors. Please also pay attention to information published by Suzhou Good-Ark Electronics Co., Ltd. by various means, including our website home page. (http://www.goodark.com)

When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, Please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

The prior written approval of Suzhou Good-Ark Electronics Co., Ltd. is necessary to reprint or reproduce in whole or in part these materials.

Please contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized distributor for further details on these materials or the products contained herein.