



No. 1640



**STK7406**

Thick Film Hybrid IC  
OFFLINE SWITCHING REGULATOR

**Features**

- . Switching regulator power IC fabricated using Sanyo's original IMST (Insulated Metal Substrate Technology)
- . Single-package, selectorless regulated power supply applicable to a wide range of line voltages from 85VAC to 264VAC
- . Sanyo's original circuit configuration requiring neither driver transformer nor bulky choke coil, providing high efficiency, small size, and light weight.
- . The STK7400 series are available for output power from 5W to 100W. They have 16 pins and are pin-compatible.
- . Designed to meet the requirements of safety standards and radio interference control standards now in force in various countries. For conducted interference through input, it is easy to make low-noise design because the IC metal substrate serves as shielding.
- . Easy to constitute multi-output
- . Built-in overcurrent protector
- . Remote ON/OFF control pin connectable

**Functions**

Pulse width modulator, oscillator, control, error amp


**Maximum Ratings at Ta=25°C**

				unit
Maximum Pin Voltage	V16max	Pin 16, TR5 base bias -6V	800	Vpk
	V11max	Pin 11	-12	V
	V10max	Pin 10	12	V
	V1max	Pin 1, TR1 base bias -1V	400	V
Maximum Pin Current	I16max	Pin 16	3.0	Apk
	I10max	Pin 10	1.0	Apk
	I1max	Pin 1	100	mA
Operating Case Temperature	Tcmax		85	°C
Storage Temperature	Tstg		-30 to +100	°C

**Recommended Operating Conditions at Ta=25°C**

		unit
Recommended Supply Voltage	V <sub>CC</sub>	280 V

**Case Outline 4057 (unit:mm)**

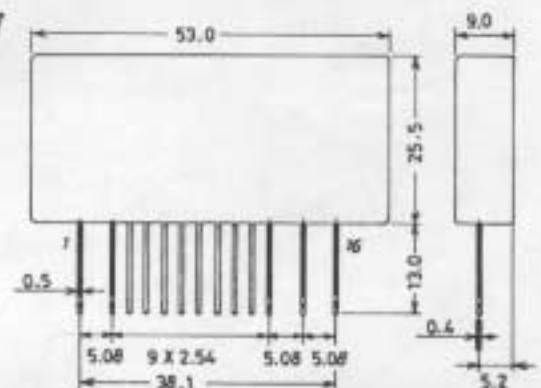

Information furnished by SANYO is believed to be accurate and reliable. However, no responsibility is assumed by SANYO for its use; nor for any infringements of patents or other rights of third parties which may result from its use, and no license is granted by implication or otherwise under any patent or patent rights of SANYO.

## STK7406

### Operating Characteristics at $T_a=25^{\circ}\text{C}$

			min	typ	max	unit
TR5 Current Amplification Factor	$h_{FE5}$	$V_{CE}=5\text{V}, I_C=3\text{A}$	8			
TR1 Current Amplification Factor	$h_{FE1}$	$V_{CE}=10\text{V}, I_C=10\text{mA}$	60			
ZD Zener Voltage	$V_{z1}$	$I_z=5\text{mA}$		8.0		V
ZD Zener Voltage	$V_{z2}$	$I_z=5\text{mA}$		7.5		V
Oscillation Frequency	$f_{osc}$			33k		Hz

### Equivalent Circuit and Functional Block Diagram

