

No.2938A

SB007W03Q

Schottky Barrier Diode (Twin Type · Cathode Common)

30V, 70mA Rectifier

Applications

· High frequency rectification (switching regulators, converters, choppers)

Features


- · Low forward voltage ($V_F \max = 0.55V$)
- · Fast reverse recovery time (trr max = 10ns)
- · Low switching noise
- · Low leakage current and high reliability due to highly reliable planar structure
- · Ultrasmall-sized package permitting SB007W03Q-applied sets to be made small and slim

Absolute Maximum Ratings at Ta = 25°C (Value per element) unit Repetitive Peak Reverse Voltage VRRM 30 V Nonrepetitive Peak Reverse 35 v Surge Voltage Average Output Current I_0 70 mA Surge Forward Current IFSM 50Hz sine wave,1 cycle Junction Temperature $^{\circ}C$ Τj -55 to +125Tstg -55 to + 125Storage Temperature $^{\circ}C$


Electrical Characteristics at Ta = 25°C (Value per element) min			typ	max	unit
Reverse Voltage	V_R	$I_{R} = 20 \mu A \qquad 30$)		V
Forward Voltage	$V_{ m F}$	$I_F = 70 \text{mA}$		0.55	V
Reverse Current	I_R	$V_R = 15V$		5	$\mu \mathbf{A}$
Interterminal Capacitance	C	$V_R = 10V, f = 1MHz$	3.0		рF
Reverse Recovery Time	trr	$I_F = I_R = 10 \text{mA}$, See specified Test Circuit.		10	ns


Marking: K


trr Test Circuit



Electrical Connection





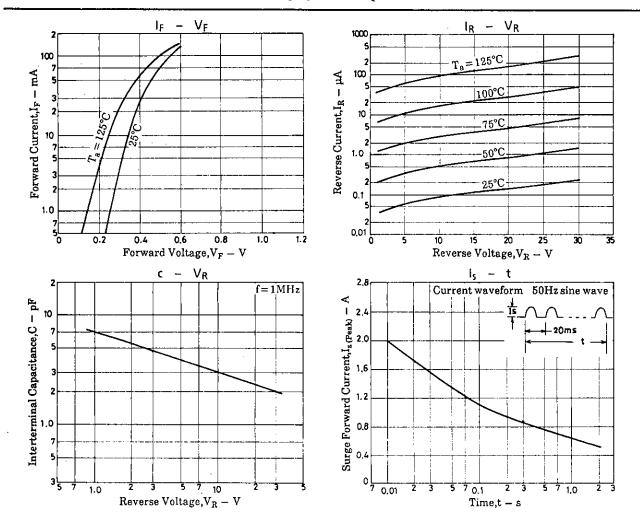

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of December, 1996. Specifications and information herein are subject to change without notice.