


## Application Guide USB2.0

### Considerations:

- Each port can operate up to 480Mbps  
→ The high data rate requires a low capacitance device to preserve signal integrity
- Requires 2 channels of data line protection per port (i.e. D+/D-)  
→ A 4 channel device can be useful if protecting a USB stack of 2 ports to make the ESD footprint as small as possible  
→  $V_{BUS}$  can be protected by connecting it to the  $V_{CC}$  pin on the diode array or by using a separate single channel device as previously shown (i.e. SP1003)

### Application Schematic:

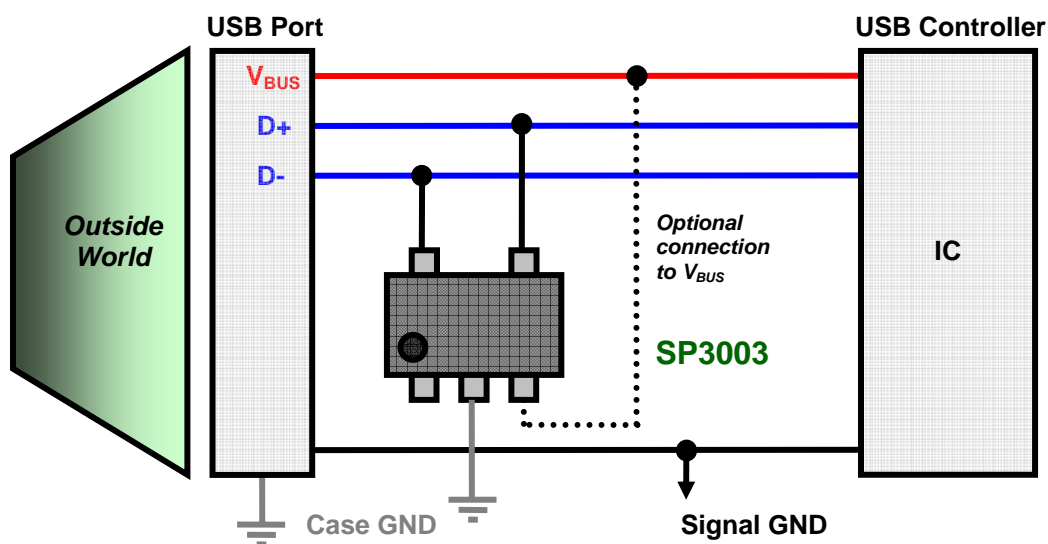

### Recommended SPA Devices:

Ordering Number	ESD Level (Contact)	I/O Capacitance	# of Channels	$V_{RWM}$	Packaging
<a href="#">SP3003-02XTG</a>	±8kV	0.65pF	2	6V	SOT553
<a href="#">SP3004-04XTG</a>	±12kV	0.85pF	4	6V	SOT563
<a href="#">SP3002-04UTG</a>	±12kV	0.85pF	4	6V	μDFN-6 (1.6x1.6mm)