
ZL60006



# 1310 nm, 1550 nm 2.5 Gbps PIN with Preamplifier Data Sheet

April 2004

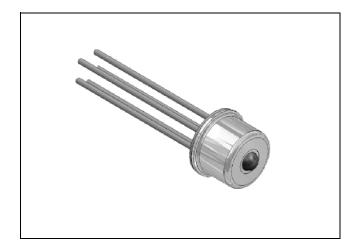

Ordering Information ZL60006TED SC Housing ZL60006/TBD TO-46 with lens ZL60006/TDD ST Housing -40°C to +85°C

This optical receiver is a 3.3 V device which contains a

PIN photodiode and a low noise transimpedance with

limiting amplifier in a TO-46 package with lens cap. It

is designed for OC-48 operation and single mode fiber.

Reliability Assurance based on Telcordia GR-468-

Description

CORE.

## Features

- Data rate up to 3.125 Gbps
- 1310 nm, 1550 nm PIN photodiode
- TO-46 Assembly
- Integrated TIA and limiting amplifier
- Single 3.3 V supply
- Low power consumption

# Applications

- Sonet OC-48
- SDH STM-16
- 2.125 Gbps fiber channel
- 2.5 to 3.125 Gbps general application






Figure 1 - Pin Diagram





#### Zarlink Semiconductor Inc. Zarlink, ZL and the Zarlink Semiconductor logo are trademarks of Zarlink Semiconductor Inc. Copyright 2003- 2004, Zarlink Semiconductor Inc. All Rights Reserved.

1

# **Optical and Electrical Characteristics**

Parameter	Symbol	Min.	Тур.	Max.	Unit	Test Condition
Responsivity, differential	R	4	6		kV/W	λ=1310 nm, R <sub>L=</sub> 100 Ω, Note 1
Output voltage amplitude, differential	⊿Vo	200	300		mV <sub>pp</sub>	R <sub>L</sub> =100 Ω Note 2
Bandwidth (3 dB <sub>el</sub> )	f <sub>c</sub>		2.0		GHz	Pf = 10 μW, R <sub>L</sub> =100 Ω
Optical Saturation Level	P <sub>sat</sub>	1			dBm	$\lambda$ =1310 nm, ER = $\infty$ Note 3
Noise-Equivalent Power	NEP		-35	-30	dBm	λ=1310 nm, Note 4
Sensitivity (BER 10 <sup>-9</sup> )	S		-25	-23	dBm	$\lambda$ =1310 nm, ER = $\infty$ Note 3
Dynamic Range			24		dB	
Output Resistance (single)	R <sub>o</sub>		50		Ω	
Power Dissipation	P <sub>D</sub>		85	140	mW	
Power Supply Current	I <sub>DD</sub>		25	38	mA	Data & Data AC Coupled

**Operating Conditions:**25°C Case Temperature/3.3 V Supply Voltage/Fiber: Single-mode 10/125  $\mu$ m fiber.

PRBS Pattern 2<sup>23</sup> -1 at 2.5 Gbps.

Note 1: Pf = 10 µW Peak-Peak Power

Note 2: Pf = 500 µW Peak-Peak Power

Note 3: Measured at  $10^{-10}$  BER with a  $2^{23}$ -1 PRBS at 2.5 Gbps

Note 4: Measured with STM-16 filter on electrical output, i.e., 1.875 GHz

# **Absolute Maximum Ratings**

Parameter	Symbol	Min.	Max.	Unit
Supply Voltage	V <sub>CC</sub>	0	3.6	V
Storage Temperature	T <sub>stg</sub>	-40	125	°C

# **Recommended Operating Conditions**

Parameter	Symbol	Min.	Тур.	Max.	Unit
Supply Voltage	V <sub>CC</sub> -V <sub>EE</sub>	3	3.3	3.6	V
Operating Temperature	T <sub>op</sub>	-40		85	°C
Signalling Rate, Note 5	f <sub>D</sub>	1		3.125	Gbps

Note 5: Data pattern are to have maximum runlength and DC-balance shifts no more than that of a PRBS-31 pattern.

# **Typical Responsivity**

	Wavelength	Fiber core/cladding diameter numerical aperture		
	wavelength	10/125 μm, NA=0.11		
Differential responsivity	1310 nm	6 kV/W		
Differential responsivity	1550 nm	7.4 kV/W		

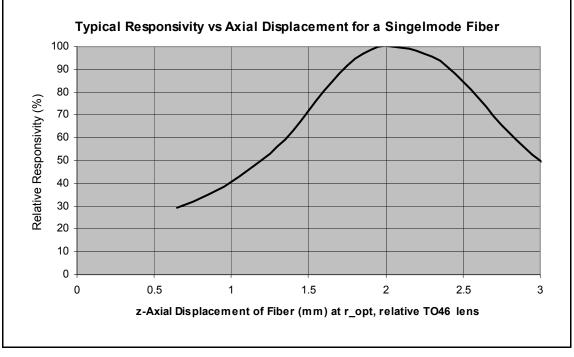


Figure 3 - Typical Responsivity vs Axial Displacement for a Singlemode Fiber

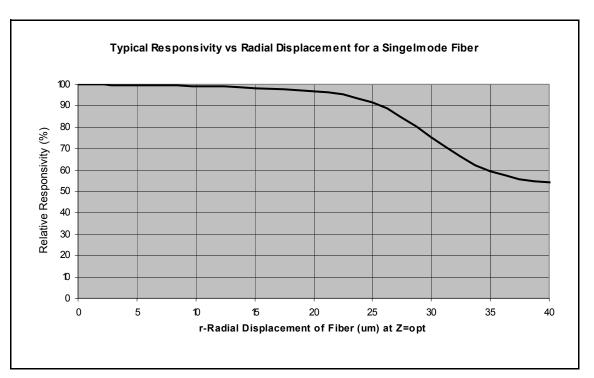


Figure 4 - Typical Responsivity vs Radial Displacement for a Singlemode Fiber


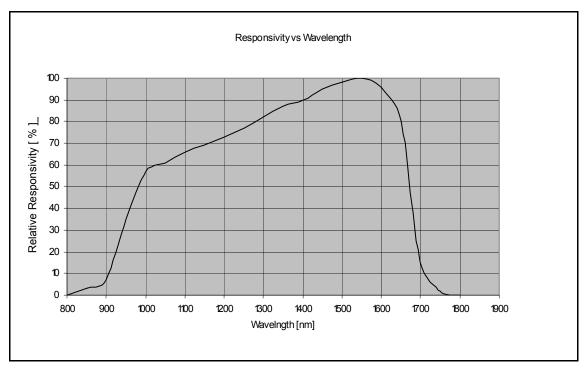


Figure 5 - Responsivity vs Wavelength of Coupled Input Power

# **Application Guidelines**



The receiver is sensitive to electrostatic discharges. When handling the device, precautions for ESD sensitive devices should be taken. These precautions include use of ESD protected work area with wrist straps, controlled work benches, floors etc.

### Power Supply Filter

Power Supply decoupling capacitors are recommended for optimal performance of the receiver. A filter is recommended to minimize power supply noise, see Figure 6.


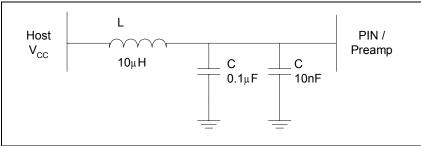


Figure 6 - Recommended Power Supply Filter

## **Data Outputs**

The outputs Data and Data, need to be AC-coupled. Typical value for the capacitors are 0.1  $\mu$ F.



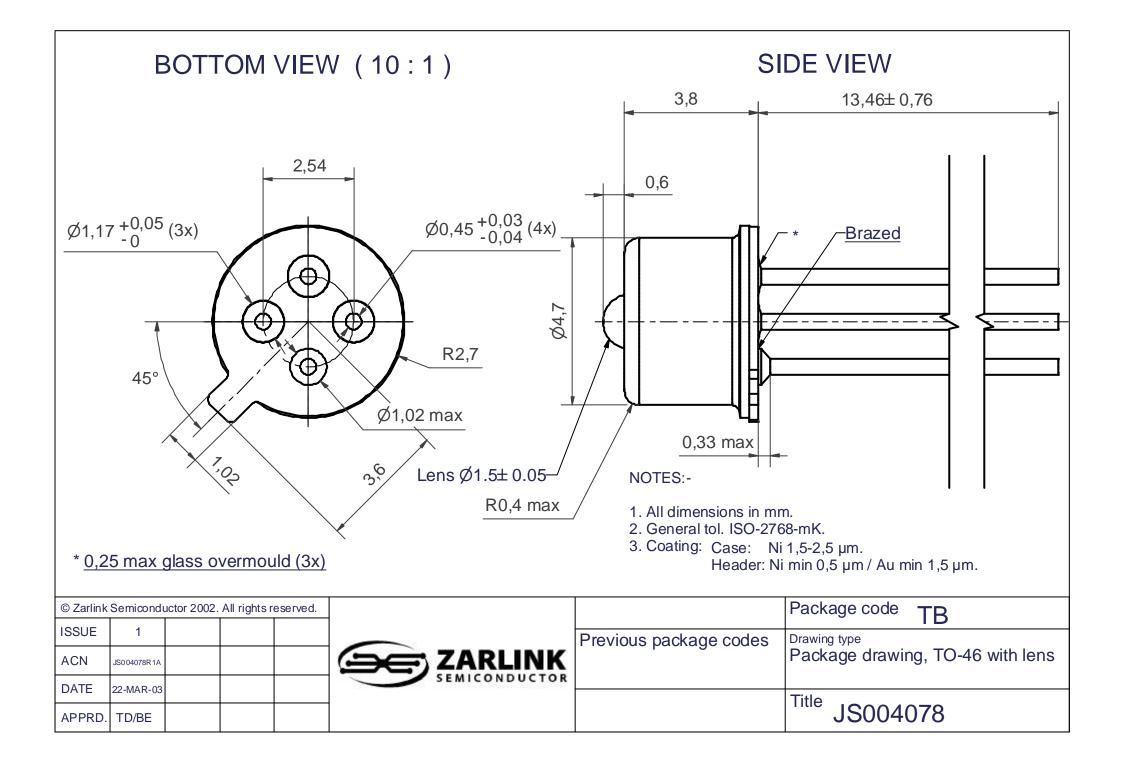

# For more information about all Zarlink products visit our Web Site at

## www.zarlink.com

Information relating to products and services furnished herein by Zarlink Semiconductor Inc. or its subsidiaries (collectively "Zarlink") is believed to be reliable. However, Zarlink assumes no liability for errors that may appear in this publication, or for liability otherwise arising from the application or use of any such information, product or service or for any infringement of patents or other intellectual property rights owned by third parties which may result from such application or use. Neither the supply of such information or purchase of product or service conveys any license, either express or implied, under patents or other intellectual property rights owned by Zarlink or licensed from third parties by Zarlink, whatsoever. Purchasers of products are also hereby notified that the use of product in certain ways or in combination with Zarlink, or non-Zarlink furnished goods or services may infringe patents or other intellectual property rights owned by Zarlink.

This publication is issued to provide information only and (unless agreed by Zarlink in writing) may not be used, applied or reproduced for any purpose nor form part of any order or contract nor to be regarded as a representation relating to the products or services concerned. The products, their specifications, services and other information appearing in this publication are subject to change by Zarlink without notice. No warranty or guarantee express or implied is made regarding the capability, performance or suitability of any product or service. Information concerning possible methods of use is provided as a guide only and does not constitute any guarantee that such methods of use will be satisfactory in a specific piece of equipment. It is the user's responsibility to fully determine the performance and suitability of any equipment using such information and to ensure that any publication or data used is up to date and has not been superseded. Manufacturing does not necessarily include testing of all functions or parameters. These products are not suitable for use in any medical products whose failure to perform may result in significant injury or death to the user. All products and materials are sold and services provided subject to Zarlink's conditions of sale which are available on request.

Purchase of Zarlink's I<sup>2</sup>C components conveys a licence under the Philips I<sup>2</sup>C Patent rights to use these components in and I<sup>2</sup>C System, provided that the system conforms to the I<sup>2</sup>C Standard Specification as defined by Philips.

Zarlink, ZL and the Zarlink Semiconductor logo are trademarks of Zarlink Semiconductor Inc.

Copyright Zarlink Semiconductor Inc. All Rights Reserved.

TECHNICAL DOCUMENTATION - NOT FOR RESALE