



Advanced Analog Circuits

Data Sheet

1A ULTRA LOW DROPOUT LINEAR REGULATOR

AZ2940

General Description

The AZ2940 is a low dropout three-terminal regulator with a typical dropout of 280mV at 1A output current.

The AZ2940 provides current limit and thermal shutdown. On-chip thermal shutdown provides protection against any combination of high current and ambient temperature that would create excessive junction temperatures.

The AZ2940 has 2.5V, 3.3V and 5.0V versions.

The AZ2940 is available in the industry standard TO-220-3, TO-263-3 and TO-252-2 power packages.

Features

- Minimum Guaranteed Output Current: 1A
- Dropout Voltage at $I_{OUT}=1A$: 280mV
- Output Accuracy: $\pm 1\%$
- Low Ground Current
- Internal Current Limit and Thermal Protection
- Reversed-battery and Reversed-lead Insertion Protection
- Fast Transient Response

Applications

- LCD TV
- Set Top Box
- LCD Monitor
- SMPS Post Regulator
- Laptop, Palmtop and Notebook
- Portable Instrumentation
- USB Power Supply

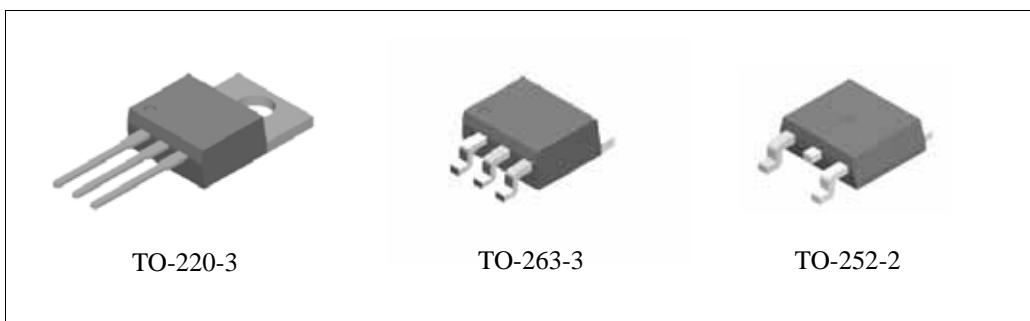


Figure 1. Package Types of AZ2940



1A ULTRA LOW DROPOUT LINEAR REGULATOR

AZ2940

Pin Configuration

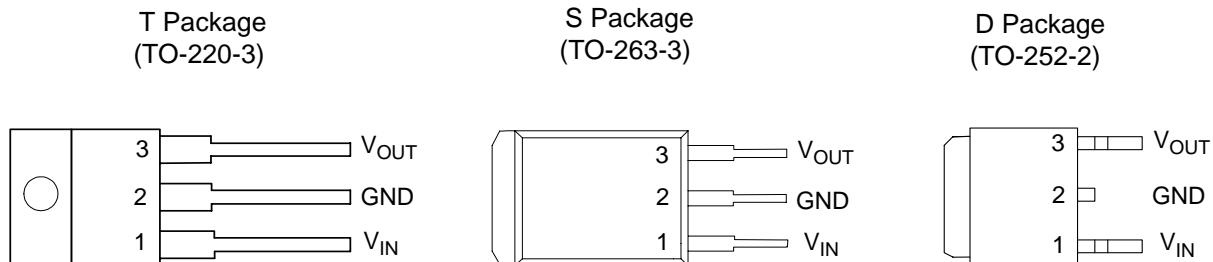


Figure 2. Pin Configuration of AZ2940 (Top View)

Pin Description

| Pin Number | Pin Name | Function |
|------------|------------------|--|
| 1 | V _{IN} | Unregulated Input. |
| 2 | GND | Ground pin. This pin and TAB are internally connected. |
| 3 | V _{OUT} | Regulated Output. |



Advanced Analog Circuits

Data Sheet

1A ULTRA LOW DROPOUT LINEAR REGULATOR

AZ2940

Functional Block Diagram

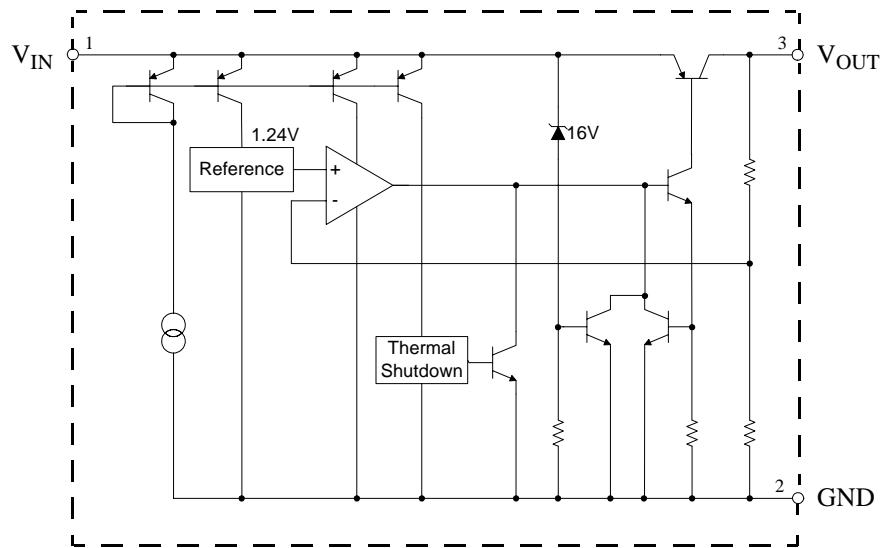



Figure 3. Functional Block Diagram of AZ2940



1A ULTRA LOW DROPOUT LINEAR REGULATOR

AZ2940

Ordering Information

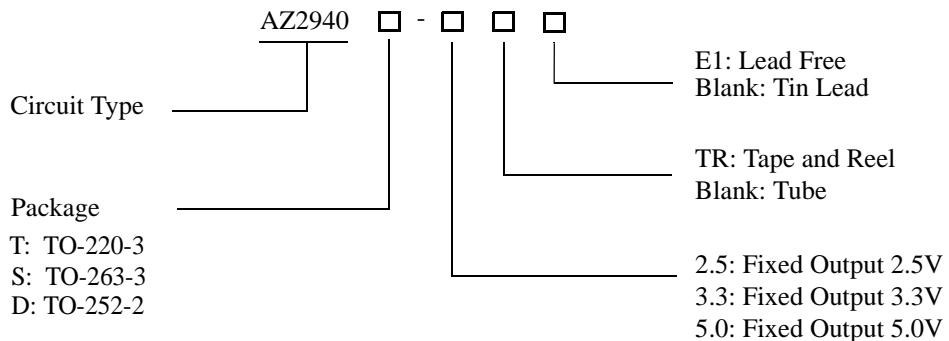

| Package | Temperature Range | Part Number | | Marking ID | | Packing Type |
|----------|-------------------|---------------|-----------------|-------------|---------------|--------------|
| | | Tin Lead | Lead Free | Tin Lead | Lead Free | |
| TO-220-3 | -40 to 125°C | AZ2940T-2.5 | AZ2940T-2.5E1 | AZ2940T-2.5 | AZ2940T-2.5E1 | Tube |
| | | AZ2940T-3.3 | AZ2940T-3.3E1 | AZ2940T-3.3 | AZ2940T-3.3E1 | Tube |
| | | AZ2940T-5.0 | AZ2940T-5.0E1 | AZ2940T-5.0 | AZ2940T-5.0E1 | Tube |
| TO-263-3 | -40 to 125°C | AZ2940S-2.5 | AZ2940S-2.5E1 | AZ2940S-2.5 | AZ2940S-2.5E1 | Tube |
| | | AZ2940S-2.5TR | AZ2940S-2.5TRE1 | AZ2940S-2.5 | AZ2940S-2.5E1 | Tape & Reel |
| | | AZ2940S-3.3 | AZ2940S-3.3E1 | AZ2940S-3.3 | AZ2940S-3.3E1 | Tube |
| | | AZ2940S-3.3TR | AZ2940S-3.3TRE1 | AZ2940S-3.3 | AZ2940S-3.3E1 | Tape & Reel |
| | | AZ2940S-5.0 | AZ2940S-5.0E1 | AZ2940S-5.0 | AZ2940S-5.0E1 | Tube |
| | | AZ2940S-5.0TR | AZ2940S-5.0TRE1 | AZ2940S-5.0 | AZ2940S-5.0E1 | Tape & Reel |
| TO-252-2 | -40 to 125°C | AZ2940D-2.5 | AZ2940D-2.5E1 | AZ2940D-2.5 | AZ2940D-2.5E1 | Tube |
| | | AZ2940D-2.5TR | AZ2940D-2.5TRE1 | AZ2940D-2.5 | AZ2940D-2.5E1 | Tape & Reel |
| | | AZ2940D-3.3 | AZ2940D-3.3E1 | AZ2940D-3.3 | AZ2940D-3.3E1 | Tube |
| | | AZ2940D-3.3TR | AZ2940D-3.3TRE1 | AZ2940D-3.3 | AZ2940D-3.3E1 | Tape & Reel |
| | | AZ2940D-5.0 | AZ2940D-5.0E1 | AZ2940D-5.0 | AZ2940D-5.0E1 | Tube |
| | | AZ2940D-5.0TR | AZ2940D-5.0TRE1 | AZ2940D-5.0 | AZ2940D-5.0E1 | Tape & Reel |

BCD Semiconductor's Pb-free products, as designated with "E1" suffix in the part number, are RoHS compliant.



1A ULTRA LOW DROPOUT LINEAR REGULATOR

AZ2940

Absolute Maximum Ratings (Note 1)

| Parameter | Symbol | Value | Unit |
|--|-------------------|------------|------|
| Supply Voltage | V _{IN} | 16 | V |
| Maximum Operating Junction Temperature | T _J | 150 | °C |
| Storage Temperature Range | T _{STG} | -65 to 150 | °C |
| Lead Temperature (Soldering, 10sec) | T _{LEAD} | 300 | °C |
| ESD (Machine Model) | | 300 | V |

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

Recommended Operating Conditions

| Parameter | Symbol | Min | Max | Unit |
|--------------------------------|-----------------|-----|------|------|
| Supply Voltage | V _{IN} | | 13.2 | V |
| Operating Junction Temperature | T _J | -40 | 125 | °C |



1A ULTRA LOW DROPOUT LINEAR REGULATOR

AZ2940

Electrical Characteristics

AZ2940-2.5V Electrical Characteristics

Operating Conditions: $V_{IN}=3.5V$, $I_{OUT}=10mA$, $C_{IN}=10\mu F$, $C_{OUT}=10\mu F$, $T_J=25^{\circ}C$, unless otherwise specified.
The **Boldface** applies over $-40^{\circ}C \leq T_J \leq 125^{\circ}C$.

| Parameter | Symbol | Condition | | Min | Typ | Max | Unit |
|--|---------------------------|---|-----------------|-------------|------------|-------------|-------------------|
| Output Voltage | V_{OUT} | $I_{OUT}=10mA$ | | 2.475 | 2.5 | 2.525 | V |
| | | $10mA \leq I_{OUT} \leq 1A$, $3.5V \leq V_{IN} \leq 13.2V$ | | 2.45 | 2.5 | 2.55 | V |
| Line Regulation | V_{RLINE} | $I_{OUT}=10mA$, $3.5V \leq V_{IN} \leq 13.2V$ | | | 5.0 | 25 | mV |
| Load Regulation | V_{RLOAD} | $V_{IN}=3.5V$, $10mA \leq I_{OUT} \leq 1A$ | | | 7.5 | 37.5 | mV |
| Output Voltage Temperature Coefficient | $\Delta V_{OUT}/\Delta T$ | $I_{OUT}=10mA$ | | | 50 | 250 | $\mu V/^{\circ}C$ |
| Dropout Voltage (Note 2) | V_{DROP} | $\Delta V_{OUT}=1\%$ | $I_{OUT}=100mA$ | | 70 | 200 | mV |
| | | | $I_{OUT}=1A$ | | 280 | 550 | mV |
| Ground Current | I_{GND} | $V_{IN}=3.5V$ | $I_{OUT}=750mA$ | | 12 | 25 | mA |
| | | | $I_{OUT}=1A$ | | 18 | | mA |
| Current Limit | I_{LIMIT} | $V_{OUT}=0V$ (Note 3) | | 1.5 | 2.2 | | A |
| Minimum Load Current | $I_{LOAD (MIN)}$ | | | | 1 | 5 | mA |
| Output Noise Voltage (rms) | | $10Hz$ to $100KHz$, $I_{OUT}=100mA$, $C_{OUT}=10\mu F$ | | | 400 | | μV |

Note 2: Dropout voltage is defined as the input-to-output differential when the output voltage drops to 99% of its nominal value which is measured at $V_{OUT}+1V$ applied to V_{IN} .

Note 3: $V_{IN}=V_{OUT(NOMINAL)}+1V$.



1A ULTRA LOW DROPOUT LINEAR REGULATOR

AZ2940

Electrical Characteristics (Continued)

AZ2940-3.3V Electrical Characteristics

Operating Conditions: $V_{IN}=4.3V$, $I_{OUT}=10mA$, $C_{IN}=10\mu F$, $C_{OUT}=10\mu F$, $T_J=25^{\circ}C$, unless otherwise specified.
The **Boldface** applies over $-40^{\circ}C \leq T_J \leq 125^{\circ}C$.

| Parameter | Symbol | Condition | | Min | Typ | Max | Unit |
|--|---------------------------|---|-----------------|-------------|------------|-------------|------------------|
| Output Voltage | V_{OUT} | $I_{OUT}=10mA$ | | 3.27 | 3.3 | 3.33 | V |
| | | $10mA \leq I_{OUT} \leq 1A$, $4.3V \leq V_{IN} \leq 13.2V$ | | 3.23 | 3.3 | 3.37 | V |
| Line Regulation | V_{RLINE} | $I_{OUT}=10mA$, $4.3V \leq V_{IN} \leq 13.2V$ | | | 6.6 | 33 | mV |
| Load Regulation | V_{RLOAD} | $V_{IN}=4.3V$, $10mA \leq I_{OUT} \leq 1A$ | | | 9.9 | 50 | mV |
| Output Voltage Temperature Coefficient | $\Delta V_{OUT}/\Delta T$ | $I_{OUT}=10mA$ | | | 66 | 330 | $\mu V/{\circ}C$ |
| Dropout Voltage (Note 2) | V_{DROP} | $\Delta V_{OUT}=1\%$ | $I_{OUT}=100mA$ | | 70 | 200 | mV |
| | | | $I_{OUT}=1A$ | | 280 | 550 | mV |
| Ground Current | I_{GND} | $V_{IN}=4.3V$ | $I_{OUT}=750mA$ | | 12 | 25 | mA |
| | | | $I_{OUT}=1A$ | | 18 | | mA |
| Current Limit | I_{LIMIT} | $V_{OUT}=0V$ (Note 3) | | 1.5 | 2.2 | | A |
| Minimum Load Current | $I_{LOAD(MIN)}$ | | | | 1 | 5 | mA |
| Output Noise Voltage (rms) | | $10Hz$ to $100KHz$, $I_{OUT}=100mA$, $C_{OUT}=10\mu F$ | | | 400 | | μV |

Note 2: Dropout voltage is defined as the input-to-output differential when the output voltage drops to 99% of its nominal value which is measured at $V_{OUT}+1V$ applied to V_{IN} .

Note 3: $V_{IN}=V_{OUT(NOMINAL)}+1V$.



1A ULTRA LOW DROPOUT LINEAR REGULATOR

AZ2940

Electrical Characteristics (Continued)

AZ2940-5.0V Electrical Characteristics

Operating Conditions: $V_{IN}=6V$, $I_{OUT}=10mA$, $C_{IN}=10\mu F$, $C_{OUT}=10\mu F$, $T_J=25^{\circ}C$, unless otherwise specified. The **Boldface** applies over $-40^{\circ}C \leq T_J \leq 125^{\circ}C$.

| Parameter | Symbol | Condition | | Min | Typ | Max | Unit |
|--|---------------------------|---|-----------------|-------------|------------|-------------|------------------|
| Output Voltage | V_{OUT} | $I_{OUT}=10mA$ | | 4.95 | 5.0 | 5.05 | V |
| | | $10mA \leq I_{OUT} \leq 1A$, $6V \leq V_{IN} \leq 13.2V$ | | 4.90 | 5.0 | 5.10 | V |
| Line Regulation | V_{RLINE} | $I_{OUT}=10mA$, $6V \leq V_{IN} \leq 13.2V$ | | | 10 | 50 | mV |
| Load Regulation | V_{RLOAD} | $V_{IN}=6V$, $10mA \leq I_{OUT} \leq 1A$ | | | 15 | 75 | mV |
| Output Voltage Temperature Coefficient | $\Delta V_{OUT}/\Delta T$ | $I_{OUT}=10mA$ | | | 100 | 500 | $\mu V/{\circ}C$ |
| Dropout Voltage (Note 2) | V_{DROP} | $\Delta V_{OUT}=1\%$ | $I_{OUT}=100mA$ | | 70 | 200 | mV |
| | | | $I_{OUT}=1A$ | | 280 | 550 | mV |
| Ground Current | I_{GND} | $V_{IN}=6V$ | $I_{OUT}=750mA$ | | 12 | 25 | mA |
| | | | $I_{OUT}=1A$ | | 18 | | mA |
| Current Limit | I_{LIMIT} | $V_{OUT}=0V$ (Note 3) | | 1.5 | 2.2 | | A |
| Minimum Load Current | $I_{LOAD(MIN)}$ | | | | 1 | 5 | mA |
| Output Noise Voltage (rms) | | $10Hz$ to $100KHz$, $I_{OUT}=100mA$, $C_{OUT}=10\mu F$ | | | 400 | | μV |

Note 2: Dropout voltage is defined as the input-to-output differential when the output voltage drops to 99% of its nominal value which is measured at $V_{OUT}+1V$ applied to V_{IN} .

Note 3: $V_{IN}=V_{OUT(NOMINAL)}+1V$.



1A ULTRA LOW DROPOUT LINEAR REGULATOR

AZ2940

Typical Performance Characteristics

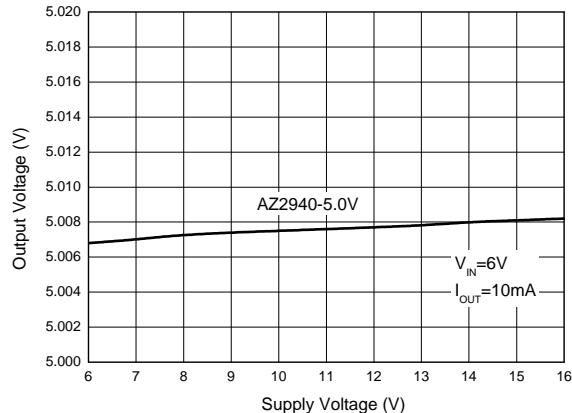


Figure 4. Line Regulation

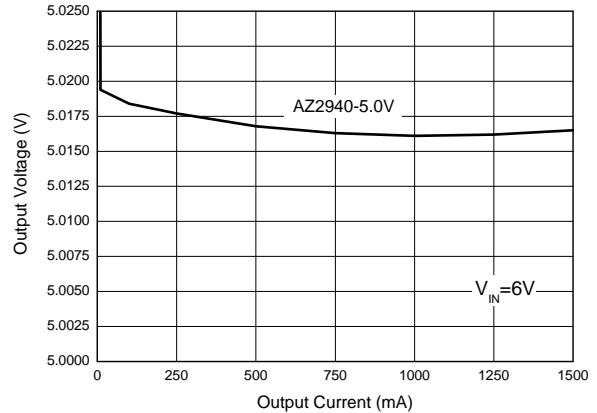


Figure 5. Load Regulation

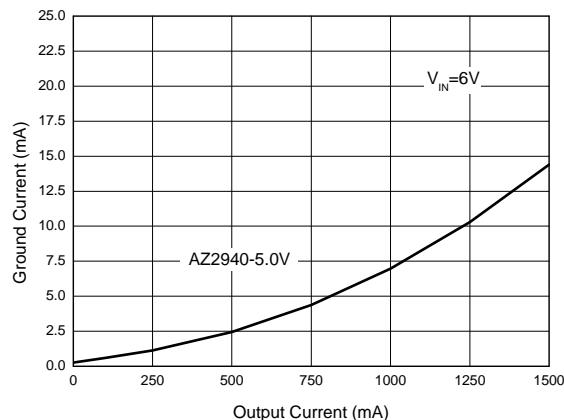


Figure 6. Ground Current vs. Output Current

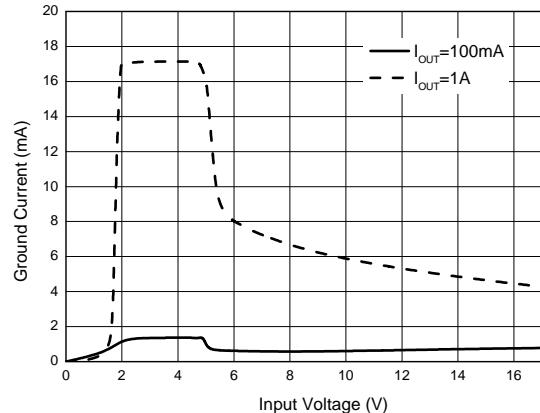


Figure 7. Ground Current vs. Input Voltage



1A ULTRA LOW DROPOUT LINEAR REGULATOR

AZ2940

Typical Performance Characteristics (Continued)

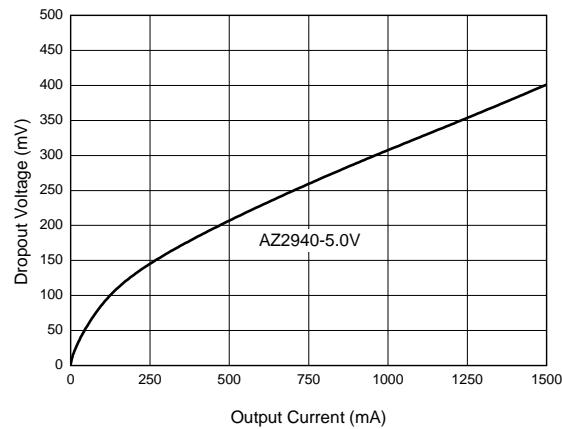


Figure 8. Dropout Voltage vs. Output Current

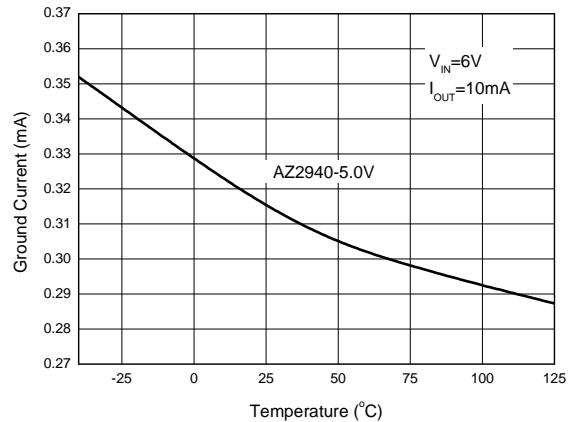


Figure 9. Ground Current vs. Temperature

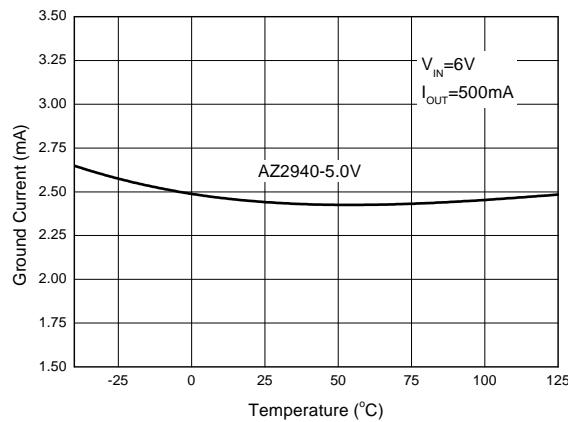


Figure 10. Ground Current vs. Temperature

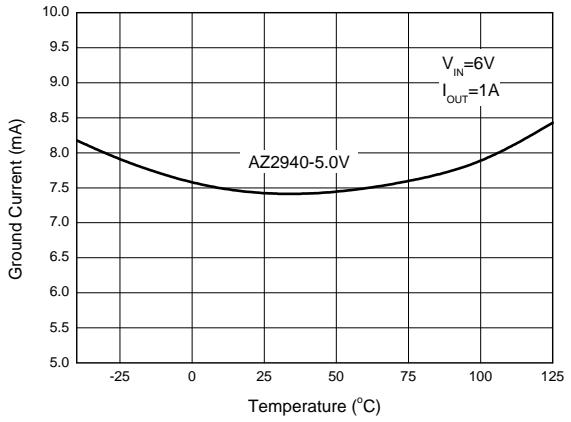


Figure 11. Ground Current vs. Temperature



Advanced Analog Circuits

Data Sheet

1A ULTRA LOW DROPOUT LINEAR REGULATOR

AZ2940

Typical Performance Characteristics (Continued)

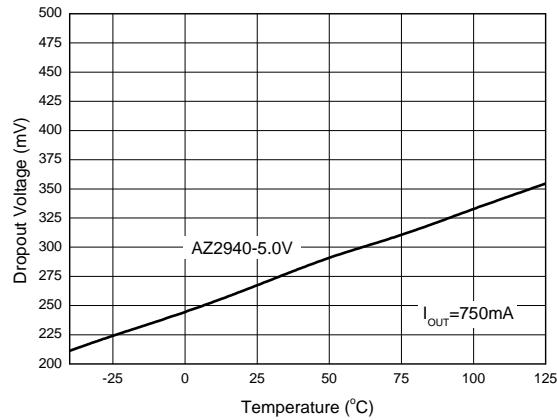


Figure 12. Dropout Voltage vs. Temperature

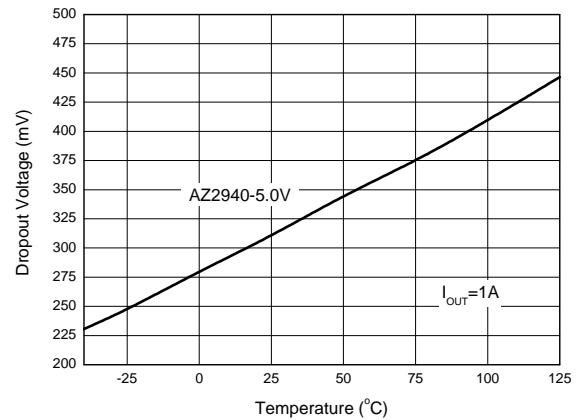


Figure 13. Dropout Voltage vs. Temperature

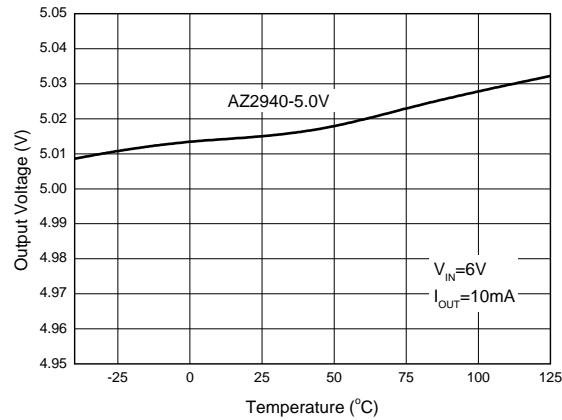


Figure 14. Output Voltage vs. Temperature

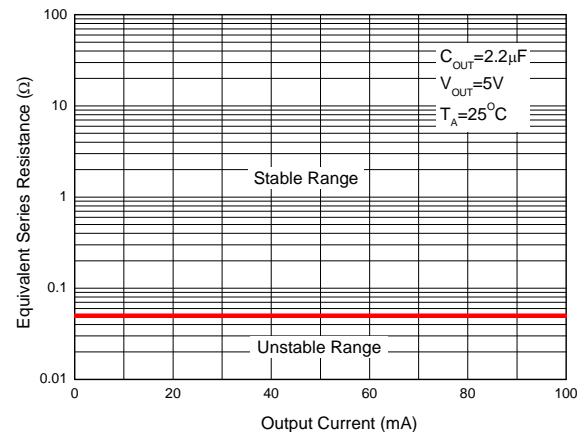


Figure 15. Output Capacitor ESR



1A ULTRA LOW DROPOUT LINEAR REGULATOR

AZ2940

Typical Performance Characteristics (Continued)

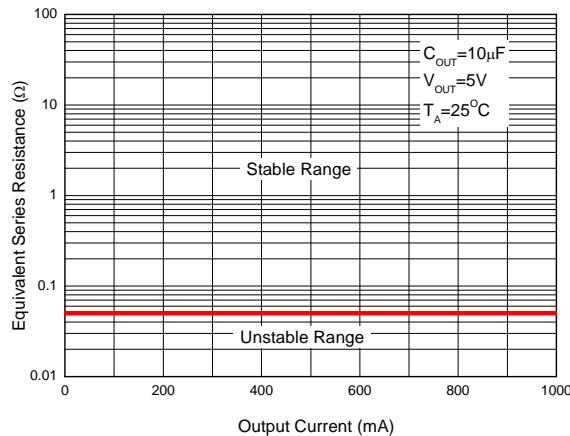


Figure 16. Output Capacitor ESR

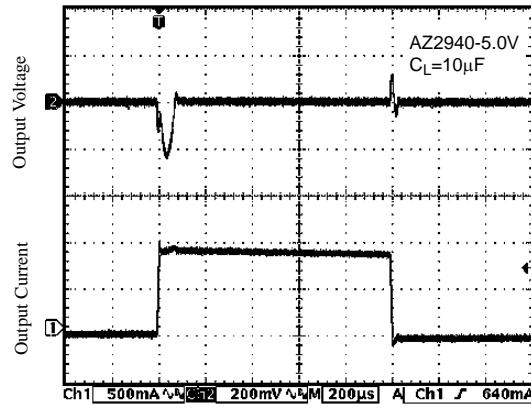


Figure 17. Load Transient

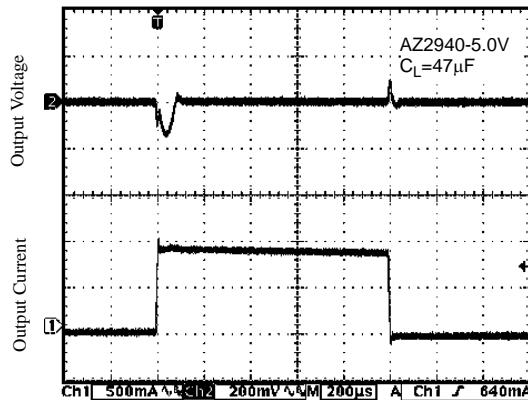


Figure 18. Load Transient

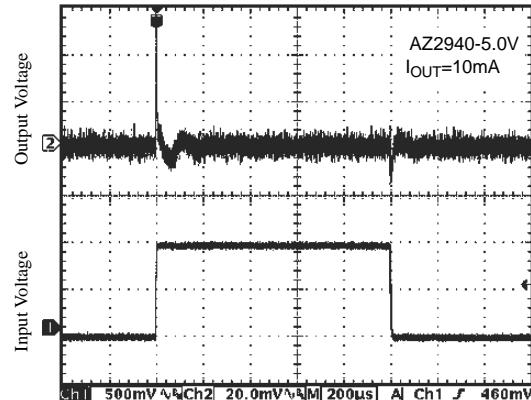


Figure 19. Line Transient



1A ULTRA LOW DROPOUT LINEAR REGULATOR

AZ2940

Typical Performance Characteristics (Continued)

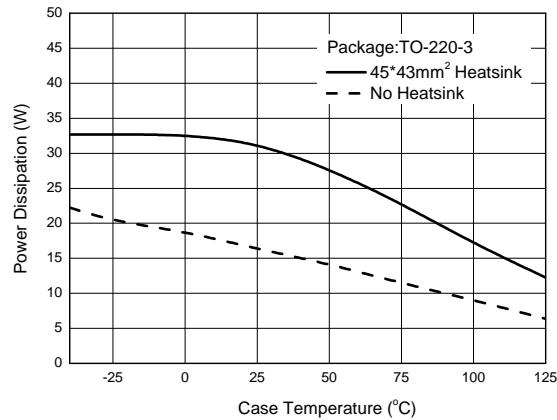


Figure 20. Power Dissipation vs. Case Temperature

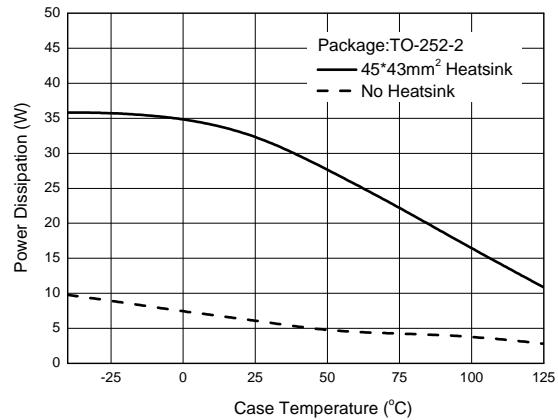


Figure 21. Power Dissipation vs. Case Temperature

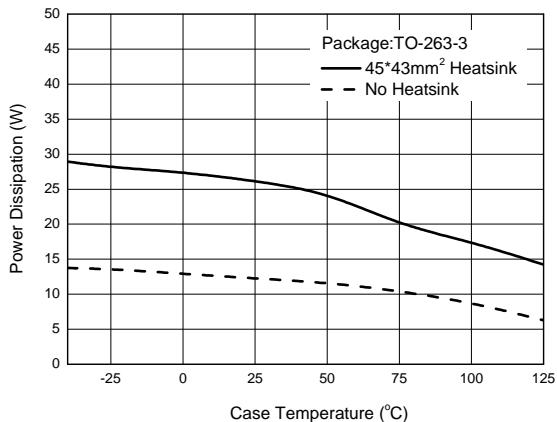


Figure 22. Power Dissipation vs. Case Temperature



Advanced Analog Circuits

Data Sheet

1A ULTRA LOW DROPOUT LINEAR REGULATOR

AZ2940

Typical Application

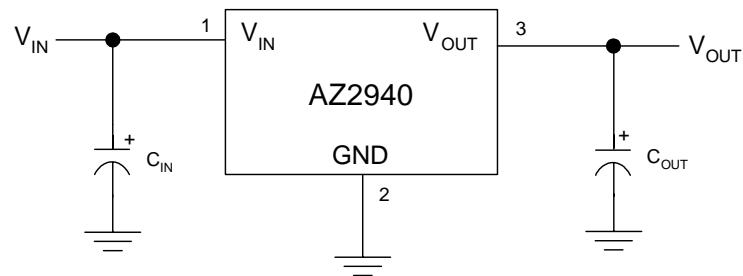


Figure 23. Typical Application of AZ2940

Note: C_{IN} is required if regulator is located far from power supply filter and is recommended to be $0.47\mu F$ or greater. To maintain stability, C_{OUT} is recommended to be $2.2\mu F$ or greater. The ESR of this capacitor is critical, please see curve.




1A ULTRA LOW DROPOUT LINEAR REGULATOR

AZ2940

Mechanical Dimensions

TO-220-3

Unit: mm(inch)

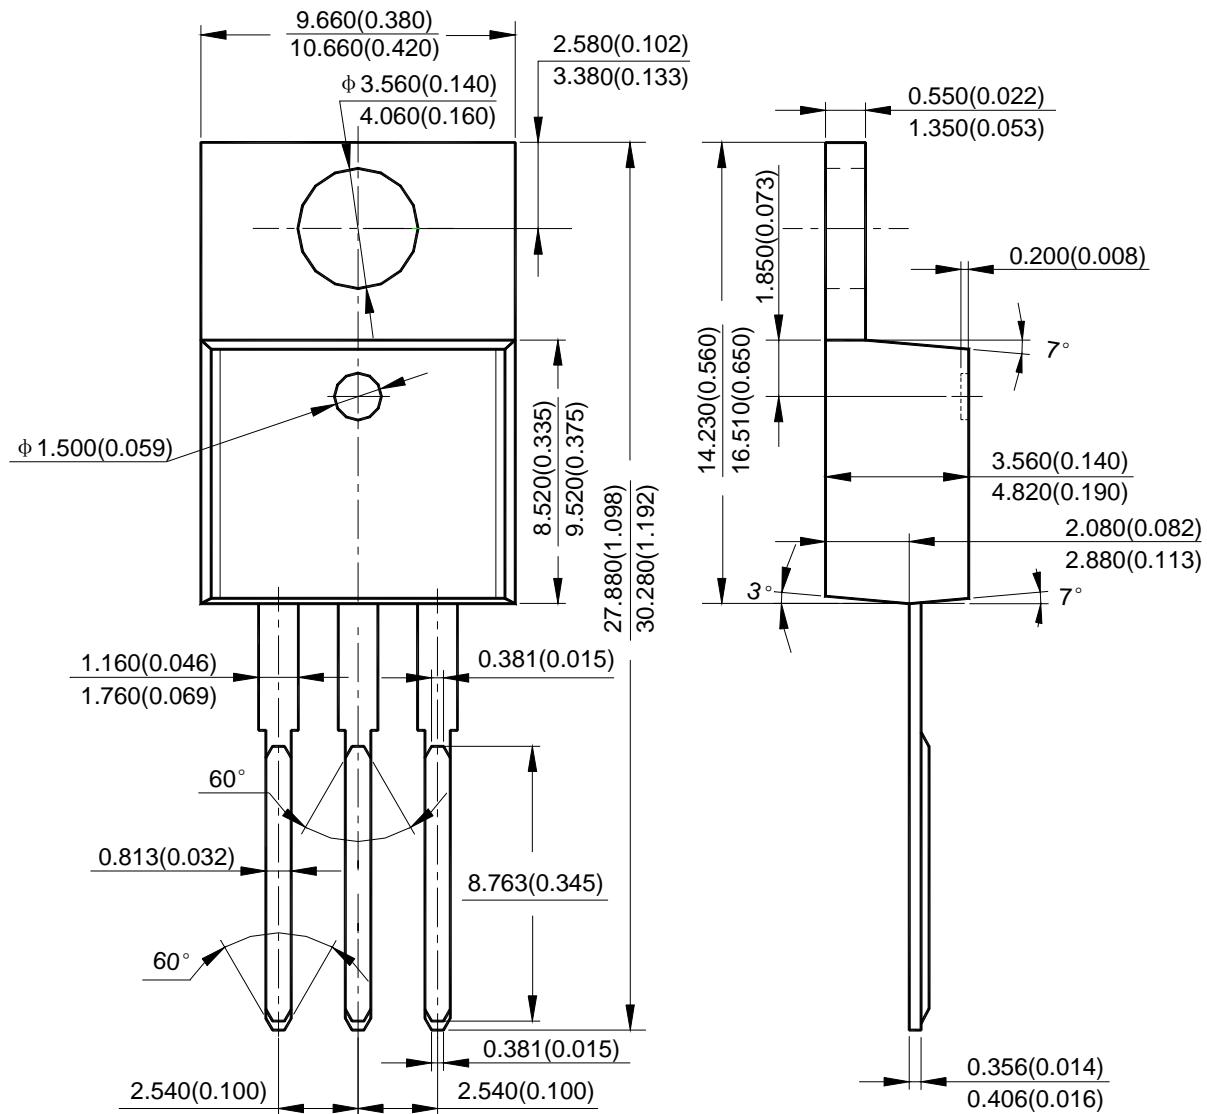



Advanced Analog Circuits

Data Sheet


1A ULTRA LOW DROPOUT LINEAR REGULATOR

AZ2940

Mechanical Dimensions (Continued)

TO-263-3

Unit: mm(inch)

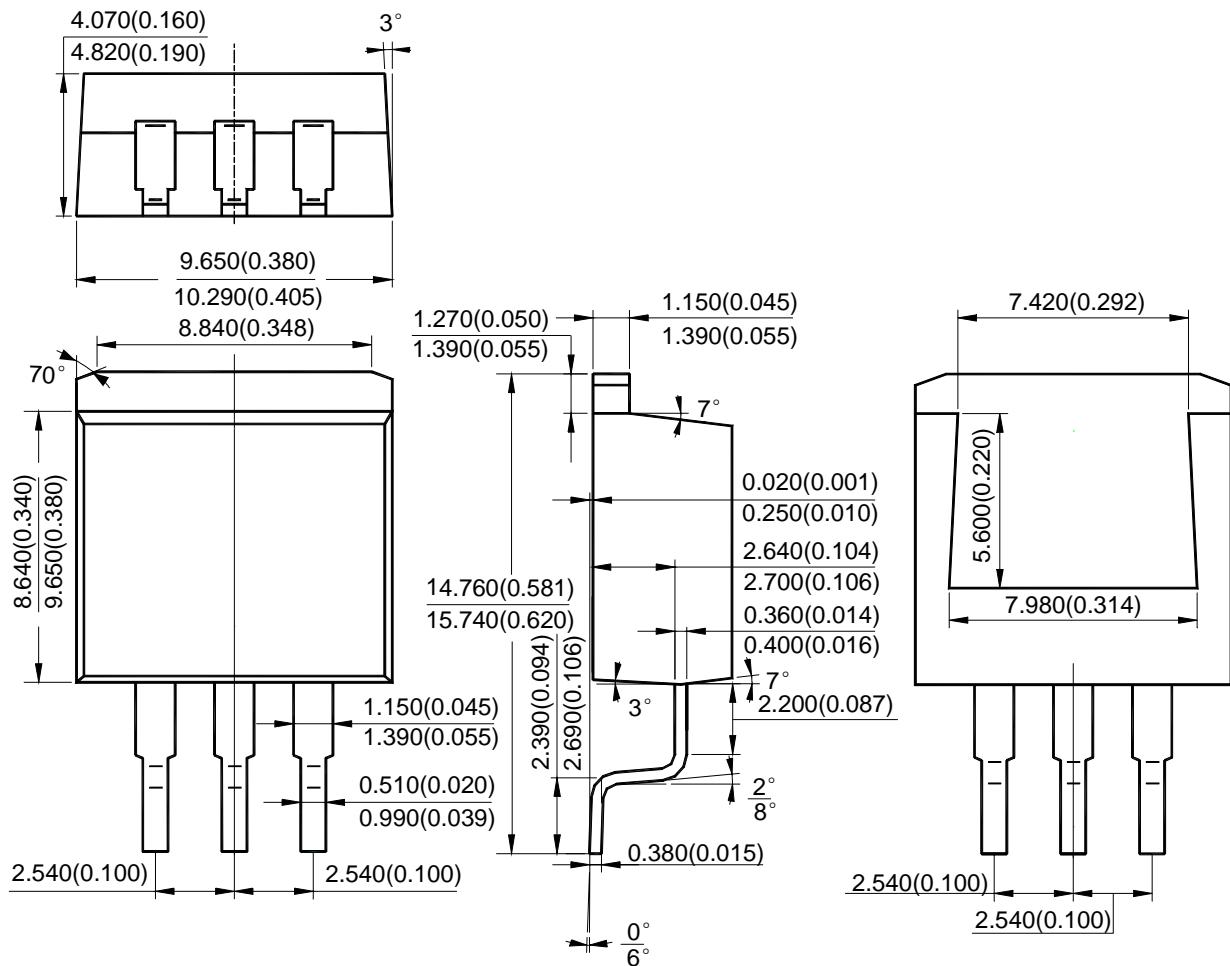




1A ULTRA LOW DROPOUT LINEAR REGULATOR

AZ2940

Mechanical Dimensions (Continued)

TO-252-2

Unit: mm(inch)

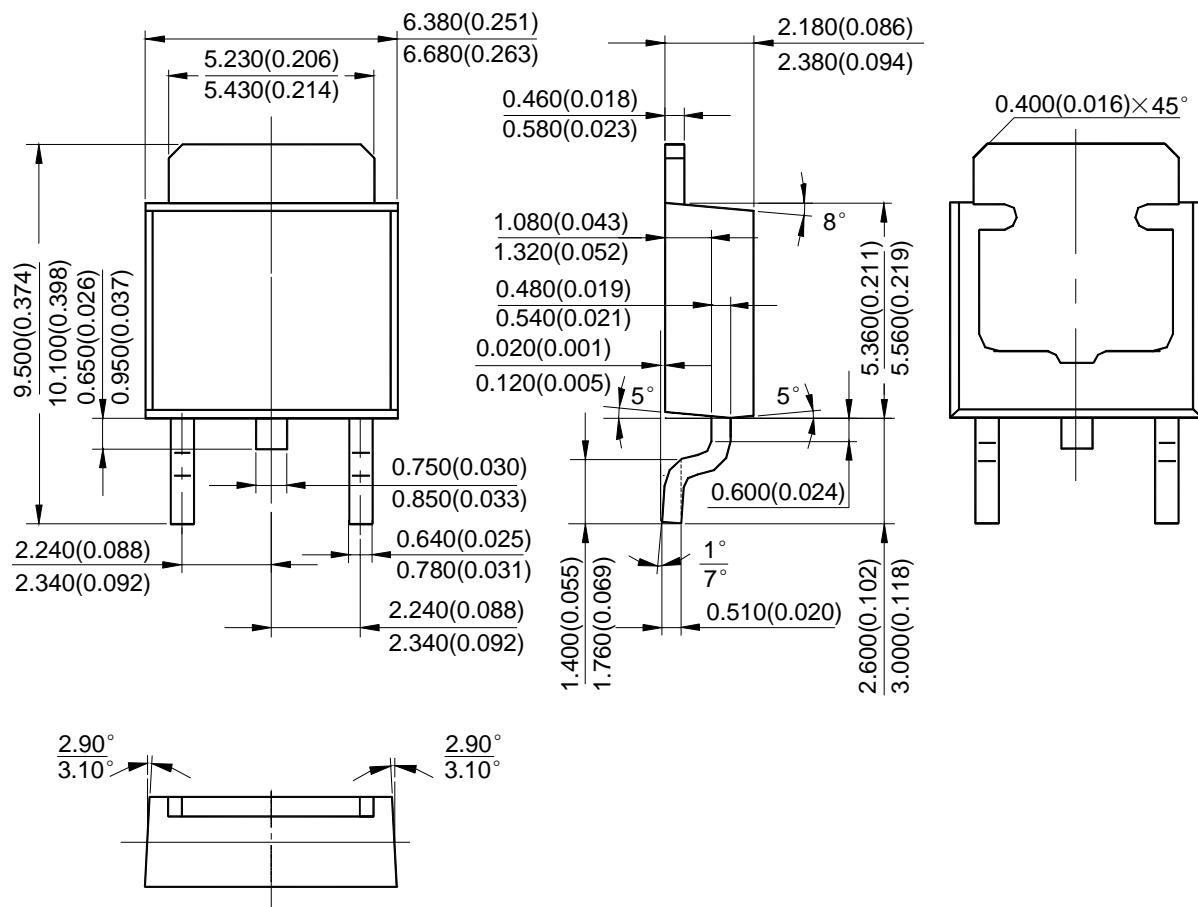



BCD Semiconductor Manufacturing Limited

<http://www.bcdsemi.com>

IMPORTANT NOTICE

BCD Semiconductor Manufacturing Limited reserves the right to make changes without further notice to any products or specifications herein. BCD Semiconductor Manufacturing Limited does not assume any responsibility for use of any its products for any particular purpose, nor does BCD Semiconductor Manufacturing Limited assume any liability arising out of the application or use of any its products or circuits. BCD Semiconductor Manufacturing Limited does not convey any license under its patent rights or other rights nor the rights of others.

MAIN SITE

BCD Semiconductor Manufacturing Limited

- Wafer Fab

Shanghai SIM-BCD Semiconductor Manufacturing Limited

800, Yi Shan Road, Shanghai 200233, China

Tel: +86-21-6485 1491, Fax: +86-21-5450 0008

BCD Semiconductor Manufacturing Limited

- IC Design Group

Advanced Analog Circuits (Shanghai) Corporation

8F, Zone B, 900, Yi Shan Road, Shanghai 200233, China

Tel: +86-21-6495 9539, Fax: +86-21-6485 9673

REGIONAL SALES OFFICE

Shenzhen Office

Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd. Shenzhen Office

Advanced Analog Circuits (Shanghai) Corporation Shenzhen Office

27B, Tower C, 2070, Middle Shen Nan Road, Shenzhen 518031, China

Tel: +86-755-8368 3987, Fax: +86-755-8368 3166

Taiwan Office

BCD Semiconductor (Taiwan) Company Limited

4F, 298-1, Rui Guang Road, Nei-Hu District, Taipei,

Taiwan

Tel: +886-2-2656 2808, Fax: +886-2-2656 2806

USA Office

BCD Semiconductor Corporation

3170 De La Cruz Blvd., Suite 105, Santa Clara,

CA 95054-2411, U.S.A

Tel: +1-408-988 6388, Fax: +1-408-988 6386