


## DESCRIPTION

MEL79 is NPN silicon planar photo-transistor with 5mm clear transparent lens. It features ultra high illumination sensitivity and fast response time.

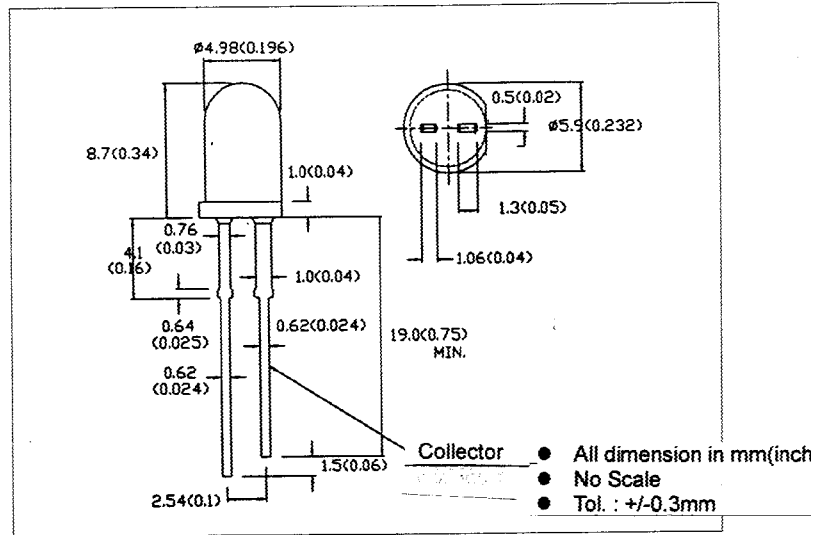

## ABSOLUTE MAXIMUM RATINGS

Collector-Emitter Voltage	V <sub>CEO</sub>	30V
Emitter-Collector Voltage	V <sub>ECO</sub>	5V
Continuous Power Dissipation	P <sub>d</sub>	50mW
Operating Junction Temperature	T <sub>j</sub>	-40 to +85°C
Storage Temperature Range	T <sub>stg</sub>	-40 to +100°C
Lead Soldering Temperature (5 second, 1/16 inch from body)		260°C

## ELECTRO-OPTICAL CHARACTERISTICS (T<sub>a</sub>=25°C)

PARAMETER	SYMBOL	MIN	MAX	UNIT	CONDITIONS
Collector-Emitter Breakdown Voltage	BV <sub>CEO</sub>	30		V	I <sub>C</sub> =100μA E <sub>e</sub> =0
Emitter-Collector Breakdown Voltage	BV <sub>ECO</sub>	5		V	I <sub>C</sub> =100μA E <sub>e</sub> =0
Dark Current	I <sub>D</sub>		200	nA	V <sub>CE</sub> =10V E <sub>e</sub> =0
Light Current	I <sub>L</sub> *	6.0		mA	V <sub>CE</sub> =5V E <sub>e</sub> =5mW/cm <sup>2</sup>
Collector-Emitter Saturation Voltage	V <sub>CE(sat)</sub>		0.3	V	I <sub>C</sub> =500μA E <sub>e</sub> =20mW/cm <sup>2</sup>
Rise Time	T <sub>r</sub>	15	TYP	μs	V <sub>CE</sub> =5V I <sub>C</sub> =1mA R <sub>L</sub> =1Kohm
Fall Time	T <sub>f</sub>	15	TYP	μs	V <sub>CE</sub> =5V I <sub>C</sub> =1mA R <sub>L</sub> =1Kohm

\* : Measured at noted irradiance as emitted from a tungsten filament lamp at a color temperature of 2354°K.



**MICRO ELECTRONICS LTD.**

38, Hung To Road, Microtron Building, Kwun Tong, Kowloon, Hong Kong.

Kwun Tong P.O. Box 69477 Hong Kong. Fax No. 2341 0321 Telex:43510 Micro Hx. Tel: 2343 0181-5