

NEC


4.8 V OPERATION SILICON RF POWER MOSFET FOR GSM1800 AND GSM1900 TRANSMISSION AMPLIFIERS

NE5500179A

FEATURES

- HIGH OUTPUT POWER:**
29.5 dBm TYP at $V_{DS} = 4.8$ V, $I_{DQ} = 100$ mA,
 $f = 1.9$ GHz, $P_{IN} = 20$ dBm
- HIGH POWER ADDED EFFICIENCY:**
55% TYP at $V_{DS} = 4.8$ V, $I_{DQ} = 100$ mA,
 $f = 1.9$ GHz, $P_{IN} = 20$ dBm
- HIGH LINEAR GAIN:**
14 dB TYP at $V_{DS} = 4.8$ V, $I_{DQ} = 100$ mA,
 $f = 1.9$ GHz, $P_{IN} = 0$ dBm
- SURFACE MOUNT PACKAGE:**
5.7 x 5.7 x 1.1 mm MAX
- SINGLE SUPPLY:**
3.0 to 6.0 V

OUTLINE DIMENSIONS (Units in mm)

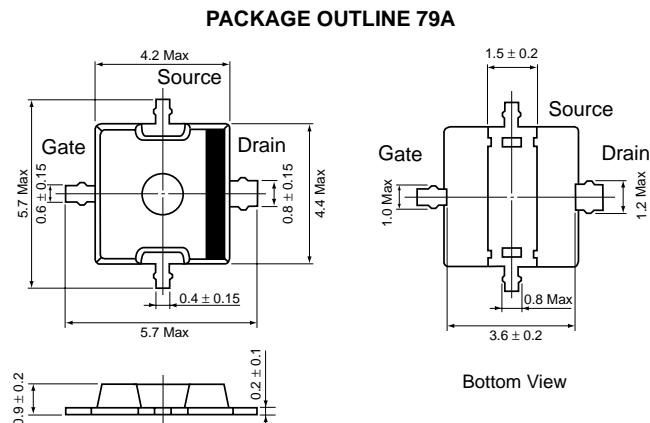

DESCRIPTION

The NE5500179A is an N-Channel silicon power MOSFET specially designed as the transmission power amplifier for 4.8 V GSM1800 and GSM1900 handsets. Dies are manufactured using NEC's NEWMOS technology (NEC's 0.6 μ m WSi gate lateral MOSFET) and housed in a surface mount package. This device can deliver 29.5 dBm output power with 55% power added efficiency at 1.9 GHz under the 4.8 V supply voltage, or can deliver 27 dBm output power with 50% power added efficiency at 3.5 V by varying the gate voltage as a power control function.

APPLICATIONS

- DIGITAL CELLULAR PHONES
- DIGITAL CORDLESS PHONES
- OTHERS

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$)

PART NUMBER PACKAGE OUTLINE			NE5500179A 79A				TEST CONDITIONS
SYMBOLS	CHARACTERISTICS	UNITS	MIN	TYP	MAX		
I_{GSS}	Gate to Source Leakage Current	nA	-	-	100		$V_{GSS} = 6.0$ V
I_{DSS}	Drain to Source Leakage Current	nA	-	-	100		$V_{DSS} = 8.5$ V
V_{TH}	Gate Threshold Voltage	V	1.0	1.35	2.0		$V_{DS} = 4.8$ V, $I_{DS} = 1$ mA
g_m	Transconductance	S	-	0.41	-		$V_{DS} = 4.8$ V, $I_{DS1} = 150$ mA, $I_{DS2} = 250$ mA
$R_{DS(ON)}$	Drain to Source On Resistance	-	-	1.00	-		$V_{GS} = 6.0$ V, $V_{DS} = 0.5$ V
BV_{DSS}	Drain to Source Breakdown Voltage	V	20	24	-		$I_{DSS} = 10$ A

PERFORMANCE SPECIFICATIONS (Peak measurement at Duty Cycle 1/8, 4.6 mS period, TA = 25°C)

SYMBOLS	CHARACTERISTICS	UNITS	MIN	TYP	MAX	TEST CONDITIONS
GL	Linear Gain	dB	—	13.0	—	f = 1.9 GHz, PIN = 0 dBm, VDS = 3.0 V, IDQ = 100 mA
POUT	Output Power	dBm	—	24.5	—	f = 1.9 GHz, PIN = 15 dBm, VDS = 3.0 V, IDQ = 100 mA
IOP	Operating Current	mA	—	170	—	
ηADD	Power Added Efficiency	%	—	50	—	
GL	Linear Gain	dB	—	13.5	—	f = 1.9 GHz, PIN = 0 dBm, VDS = 3.5 V, IDQ = 100 mA
POUT(1)	Output Power	dBm	—	26.5	—	f = 1.9 GHz, PIN = 18 dBm, VDS = 3.5 V, IDQ = 100 mA
IOP(1)	Operating Current	mA	—	210	—	
ηADD	Power Added Efficiency	%	—	52	—	
POUT(2)	Maximum Output Power	dBm	—	27.0	—	f = 1.9 GHz, PIN = 18 dBm VDS = 3.5 V, VGS = 2.5 V
IOP(2)	Operating Current	mA	—	260	—	
GL	Linear Gain	dB	—	14.0	—	f = 1.9 GHz, PIN = 0 dBm, VDS = 4.8 V, IDQ = 100 mA
POUT(1)	Output Power	dBm	28.5	29.5	—	f = 1.9 GHz, PIN = 20 dBm, VDS = 4.8 V, IDQ = 100 mA
IOP(1)	Operating Current	mA	—	300	—	
ηADD	Power Added Efficiency	%	47	55	—	
POUT(2)	Maximum Output Power	dBm	—	30.0	—	f = 1.9 GHz, PIN = 20 dBm VDS = 4.8 V, VGS = 2.5 V
IOP(2)	Operating Current	mA	—	350	—	
GL	Linear Gain	dB	—	14.5	—	f = 1.9 GHz, PIN = 0 dBm, VDS = 6.0 V, IDQ = 100 mA
POUT	Output Power	dBm	—	31.5	—	f = 1.9 GHz, PIN = 22 dBm, VDS = 6.0 V, IDQ = 100 mA
IOP	Operating Current	mA	—	380	—	
ηADD	Power Added Efficiency	%	—	55	—	

ABSOLUTE MAXIMUM RATINGS¹ (TA = 25 °C)

SYMBOLS	PARAMETERS	UNITS	RATINGS
VDS	Drain Supply Voltage	V	8.5
VGS	Gate Supply Voltage	V	6
ID	Drain Current	A	0.25
ID	Drain Current (Pulse Test) ²	A	0.5
PIN	Input Power ³	dBm	25
PT	Total Power Dissipation	W	1.6
TCH	Channel Temperature	°C	125
TSTG	Storage Temperature	°C	-55 to +125

Notes:

1. Operation in excess of any one of these parameters may result in permanent damage.
2. Duty Cycle 50%, TON = LMS.
3. Frequency = 1.9 GHz, VDS = 4.8 V.

ORDERING INFORMATION¹

PART NUMBER	QTY
NE5500179A-T1	1 Kpcs/Reel







Note:

1. Embossed tape 12 mm wide. Gate pin faces perforation side of the tape.

RECOMMENDED OPERATING CONDITIONS

SYMBOLS	PARAMETERS	TEST CONDITIONS	UNITS	MIN	TYP	MAX
VDS	Drain Supply Voltage		V	3.0	3.5	6.0
VGS	Gate Supply Voltage		V	0	2.0	2.5
ID	Drain Current (Pulse Test)	Duty Cycle 50%, Ton1ms	A	—	—	0.5
PIN	Input Power	Frequency = 1.9 GHz, VDS = 4.8 V	dBm	21	22	23
f	Operating Frequency Range		GHz	1.6	—	2.5
TOP	Operating Temperature		°C	-30	25	85

TYPICAL PERFORMANCE CURVES ($T_A = 25^\circ\text{C}$)

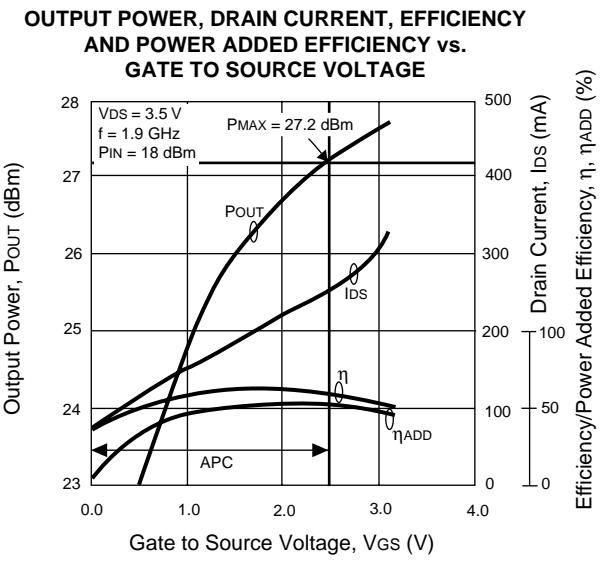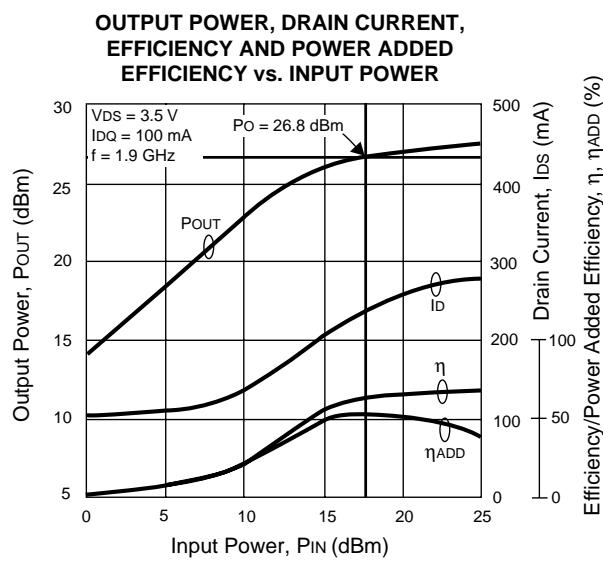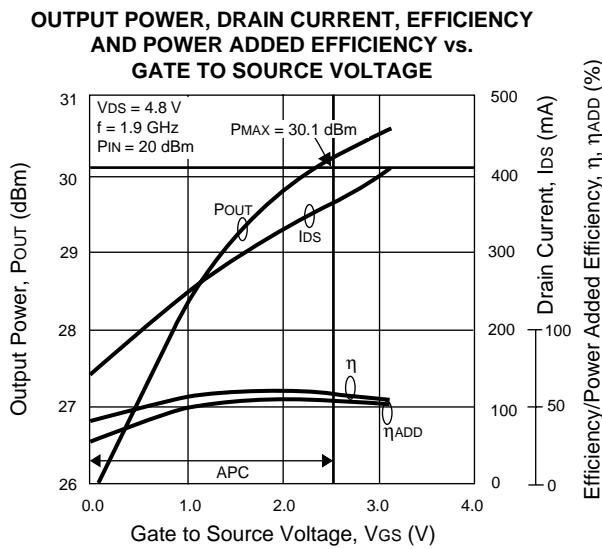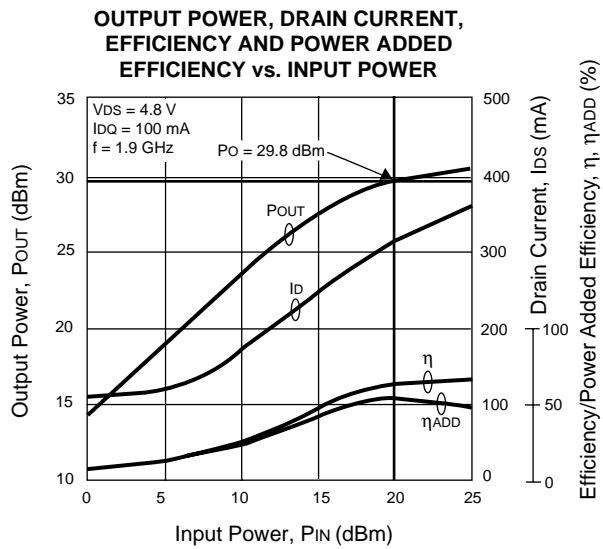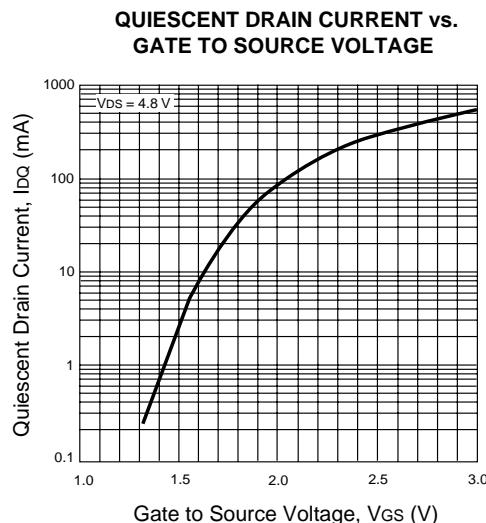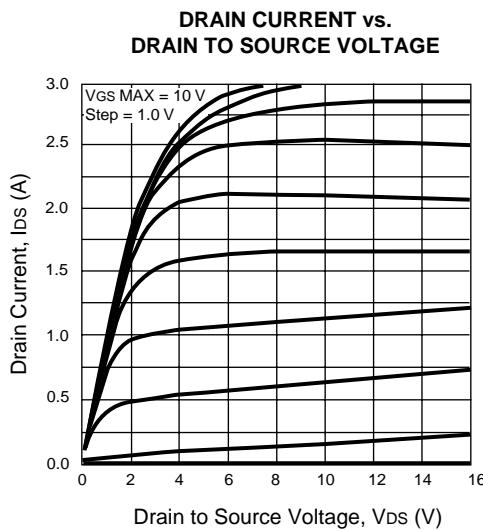

NE5500179A

TYPICAL SCATTERING PARAMETERS ($T_A = 25^\circ C$)

NE5500179A

$V_{DS} = 4.8 V$, $I_{DS} = 100 mA$

FREQUENCY	S_{11}		S_{21}		S_{12}		S_{22}		K	MAG ¹ (dB)
	GHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG	
0.1	0.884	-69.6	18.11	135.5	0.037	48.2	0.517	-85.0	0.00	26.8
0.2	0.792	-107.8	12.12	112.3	0.049	23.2	0.569	-120.7	0.06	23.9
0.3	0.757	-127.4	8.58	98.8	0.052	10.8	0.598	-136.5	0.08	22.1
0.4	0.747	-138.7	6.58	89.4	0.052	3.3	0.618	-144.8	0.11	21.0
0.5	0.746	-146.2	5.28	82.1	0.052	-4.1	0.641	-149.8	0.13	20.1
0.6	0.751	-151.8	4.32	76.2	0.050	-8.9	0.660	-153.4	0.18	19.3
0.7	0.756	-155.6	3.68	70.9	0.048	-12.6	0.681	-156.2	0.22	18.8
0.8	0.772	-159.5	3.12	65.9	0.048	-17.0	0.696	-158.9	0.23	18.1
0.9	0.777	-162.3	2.75	61.3	0.045	-22.1	0.715	-161.0	0.28	17.9
1.0	0.785	-165.0	2.40	58.2	0.043	-21.9	0.732	-162.9	0.33	17.4
1.1	0.796	-167.7	2.17	53.7	0.040	-26.9	0.749	-164.9	0.35	17.2
1.2	0.804	-169.9	1.91	51.4	0.038	-29.2	0.763	-166.9	0.42	17.0
1.3	0.814	-172.4	1.74	46.4	0.036	-30.5	0.776	-169.1	0.45	16.8
1.4	0.820	-174.6	1.58	44.3	0.035	-31.4	0.789	-171.0	0.48	16.5
1.5	0.827	-176.8	1.45	39.7	0.035	-36.6	0.803	-172.7	0.44	16.1
1.6	0.832	-179.6	1.33	38.4	0.031	-38.5	0.808	-175.0	0.62	16.3
1.7	0.833	-177.9	1.19	34.6	0.030	-38.3	0.814	-176.7	0.78	16.0
1.8	0.846	-175.6	1.13	31.6	0.028	-38.7	0.829	-179.2	0.70	16.1
1.9	0.843	-172.9	1.02	28.3	0.025	-38.1	0.834	-178.7	0.98	16.0
2.0	0.850	-170.3	0.99	27.1	0.024	-40.9	0.840	-176.5	0.97	16.1
2.1	0.851	-167.1	0.89	23.3	0.021	-42.9	0.842	-174.4	1.42	12.4
2.2	0.854	-165.1	0.83	21.4	0.019	-48.0	0.847	-172.1	1.62	11.7
2.3	0.861	-162.3	0.75	16.9	0.017	-43.6	0.856	-169.1	1.88	10.9
2.4	0.857	-159.5	0.76	15.5	0.017	-40.8	0.866	-167.0	1.68	11.5
2.5	0.870	-156.6	0.67	13.8	0.015	-49.0	0.862	-164.7	2.20	10.2
2.6	0.870	-153.9	0.65	12.0	0.016	-36.8	0.865	-162.0	2.13	10.1
2.7	0.867	-151.6	0.56	9.0	0.010	-33.0	0.866	-159.1	4.44	7.8
2.8	0.870	-148.9	0.57	3.9	0.010	-43.4	0.879	-156.7	3.96	8.6
2.9	0.873	-146.5	0.52	4.7	0.007	-18.3	0.879	-154.5	6.01	7.6
3.0	0.882	-143.9	0.51	2.7	0.008	-15.0	0.885	-152.0	4.60	8.2

Note:

1. Gain Calculation:

$$MAG = \frac{|S_{21}|}{|S_{12}|} \left(K - \sqrt{K^2 - 1} \right). \text{ When } K \leq 1, \text{ MAG is undefined and MSG values are used. } MSG = \frac{|S_{21}|}{|S_{12}|}, K = \frac{1 + |\Delta|^2 - |S_{11}|^2 - |S_{22}|^2}{2 |S_{12} S_{21}|}, \Delta = S_{11} S_{22} - S_{21} S_{12}$$

MAG = Maximum Available Gain

MSG = Maximum Stable Gain

RECOMMENDED P.C.B. LAYOUT (Units in mm)