

Series PVT322A

Microelectronic Power IC
HEXFET® Power MOSFET Photovoltaic Relay
Dual Pole, Normally Open
0-250V, 170mA AC/DC


General Description

The PVT322A Series Photovoltaic Relay is a dual-pole, normally open solid-state relay that can replace electromechanical relays in many applications. It utilizes International Rectifier's HEXFET power MOSFET as the output switch, driven by an integrated circuit photovoltaic generator of novel construction. The output switch is controlled by radiation from a GaAlAs light emitting diode (LED) which is optically isolated from the photovoltaic generator.

Series PVT322A Relays are packaged in an 8-pin, molded DIP package with either through-hole or surface mount (gull-wing) terminals. It is available in standard plastic shipping tubes or on tape-and-reel. Please refer to Part Identification information opposite.

Features

- HEXFET Power MOSFET output
- Bounce-free operation
- 4,000 V_{RMS} I/O isolation
- Linear AC/DC operation
- Solid-State Reliability

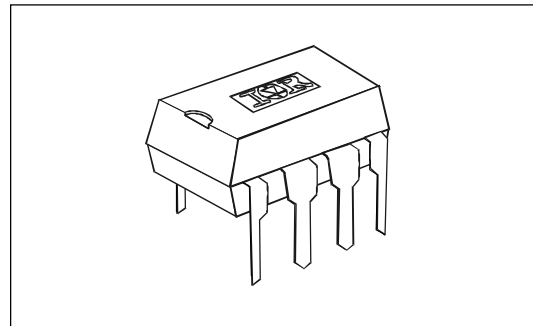

Applications

- On/Off Hook switch
- Tip and Ring Line switching
- General switching

Part Identification

PVT322A	through-hole
PVT322AS	SMT
PVT322AS-T	SMT, T&R

Series PVT322A

International
IR Rectifier


Electrical Specifications ($-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ unless otherwise specified)

INPUT CHARACTERISTICS	Limits	Units
Minimum Control Current (See figure 1)	2.0	mA
Maximum Control Current for Off-State Resistance @ $T_A=+25^{\circ}\text{C}$	0.4	mA
Control Current Range (Caution: current limit input LED, see figure 5)	2.0 to 25	mA
Maximum Reverse Voltage	7.0	V

OUTPUT CHARACTERISTICS	Limits	Units
Operating Voltage Range	0 to ± 250	$V_{(\text{DC or AC peak})}$
Maximum Load Current @ $T_A=+40^{\circ}\text{C}$ 5mA Control (See figure 1) (single and dual channel operation)	170	mA
Maximum Peak Load Current (10ms maximum duration) (single and dual channel operation)	500	mA
Maximum On-State Resistance @ $T_A=+25^{\circ}\text{C}$ For 50mA Pulsed load, 5mA Control (see figure 3)	8	Ω
Maximum Off-State Leakage @ $T_A=+25^{\circ}\text{C}$, $\pm 250\text{V}$ (see figure 4)	1.0	μA
Maximum Turn-On Time @ $T_A=+25^{\circ}\text{C}$ (see figure 6) For 50mA, 100 V_{DC} load, 5mA Control	3.0	ms
Maximum Turn-Off Time @ $T_A=+25^{\circ}\text{C}$ (see figure 6) For 50mA, 100 V_{DC} load, 5mA Control	0.5	ms
Maximum Output Capacitance @ 50V _{DC}	50	pF

GENERAL CHARACTERISTICS	Limits	Units
Minimum Dielectric Strength, Input-Output	4000	V_{RMS}
Minimum Dielectric Strength, Pole-to-Pole	1000	V_{DC}
Minimum Insulation Resistance, Input-Output, @ $T_A=+25^{\circ}\text{C}$, 50%RH, 100V _{DC}	10^{12}	Ω
Maximum Capacitance, Input-Output	1.0	pF
Maximum Pin Soldering Temperature (10 seconds maximum)	+260	$^{\circ}\text{C}$
Ambient Temperature Range:	Operating	
	Storage	
	-40 to +85	
	-40 to +100	

Connection Diagram

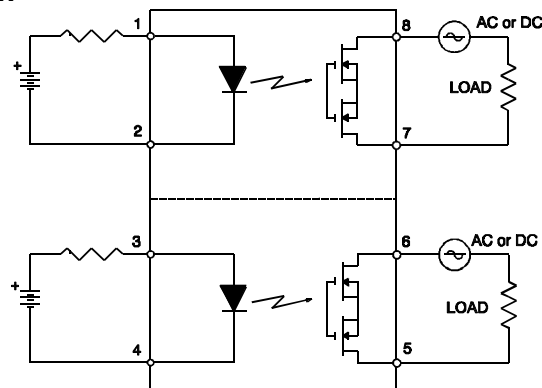

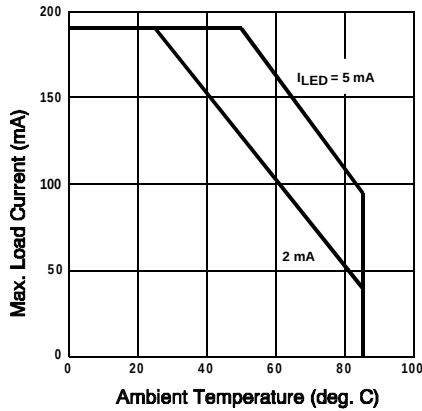


Figure 1. Typical Current Derating Curve

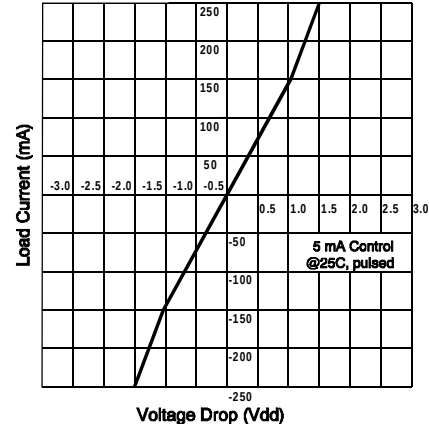


Figure 2. Linearity Characteristics

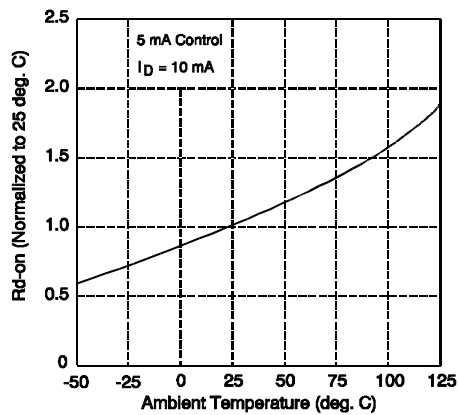


Figure 3. Typical Normalized On-Resistance

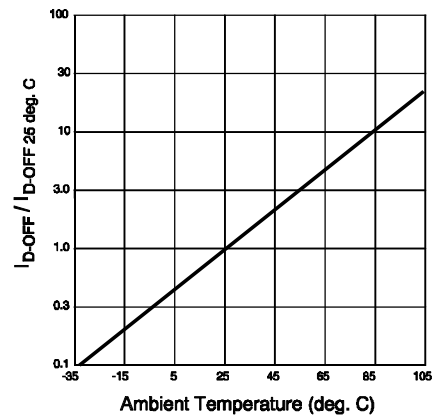


Figure 4. Typical Normalized Off-State Leakage

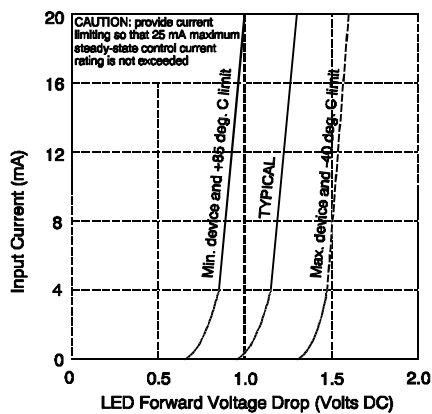


Figure 5. Input Characteristics (Current Controlled)

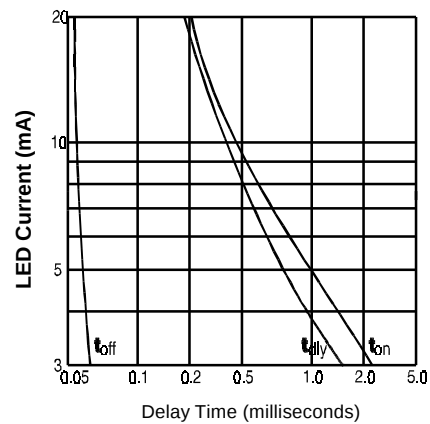


Figure 6. Typical Delay Times

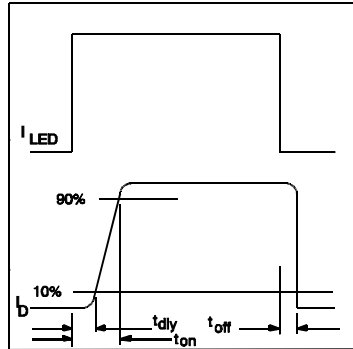


Figure 7. Delay Time Definitions


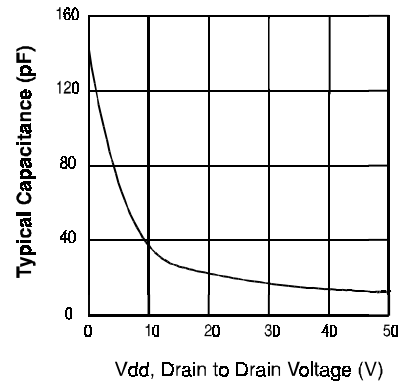


Figure 8. Typical Output Capacitance

Case Outline

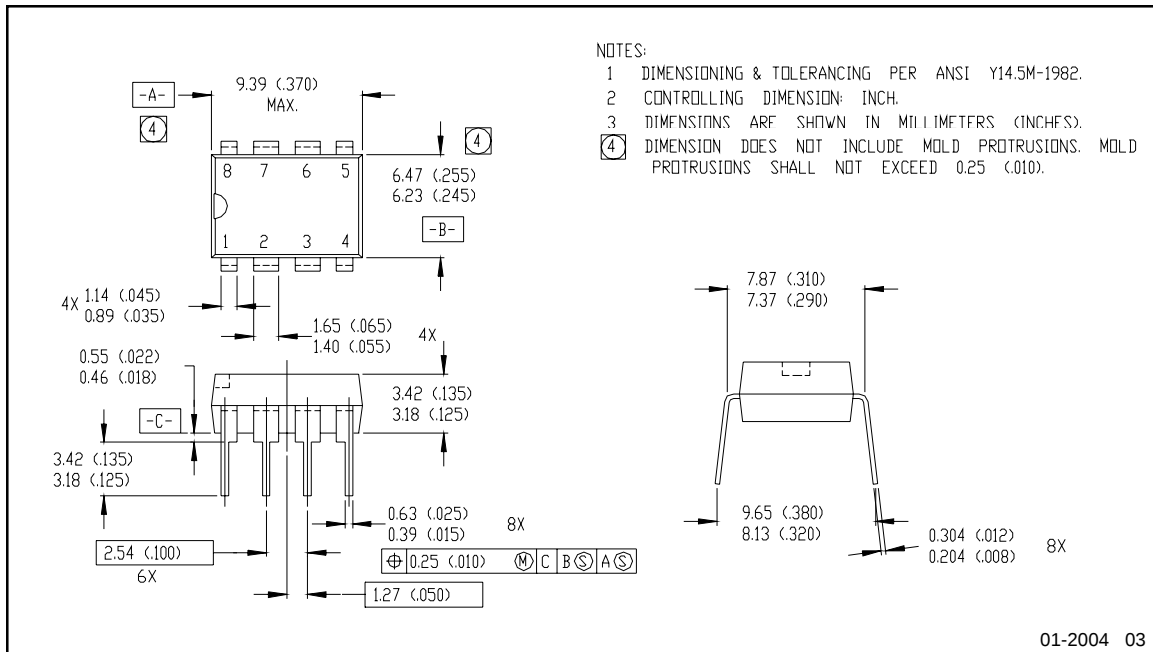

01-2004 03

Technical drawing of a mold assembly showing a top view, a side view, and a detail view of a pin.

Top View:

- Overall width: 9.39 (.370) MAX.
- Pin pitch: 1.65 (.065)
- Pin diameter: 0.63 (.025)
- Pin height: 3.42 (.135)
- Pin 1 diameter: 0.63 (.025)
- Pin 2 diameter: 0.39 (.015)
- Pin 3 diameter: 0.63 (.025)
- Pin 4 diameter: 0.39 (.015)
- Pin 5 diameter: 0.63 (.025)
- Pin 6 diameter: 0.39 (.015)
- Pin 7 diameter: 0.63 (.025)
- Pin 8 diameter: 0.39 (.015)

Side View:

- Plate thickness: 1.01 (.040)
- Pin height: 3.42 (.135)
- Pin 1 height: 3.18 (.125)
- Pin 2 height: 3.18 (.125)
- Pin 3 height: 3.18 (.125)
- Pin 4 height: 3.18 (.125)
- Pin 5 height: 3.18 (.125)
- Pin 6 height: 3.18 (.125)
- Pin 7 height: 3.18 (.125)
- Pin 8 height: 3.18 (.125)

Detail View:

- Pin diameter: 0.304 (.012)
- Pin length: 1.14 (.045)
- Pin 1 length: 0.89 (.035)
- Pin 2 length: 0.89 (.035)
- Pin 3 length: 0.89 (.035)
- Pin 4 length: 0.89 (.035)
- Pin 5 length: 0.89 (.035)
- Pin 6 length: 0.89 (.035)
- Pin 7 length: 0.89 (.035)
- Pin 8 length: 0.89 (.035)

Notes:

- DIMENSIONING & TOLERANCING PER ANSI Y14.5M-1982.
- CONTROLLING DIMENSION: INCH.
- DIMENSIONS ARE SHOWN IN MILLIMETERS (INCHES).
- DIMENSION DOES NOT INCLUDE MOLD PROTRUSIONS. MOLD PROTRUSIONS SHALL NOT EXCEED 0.25 (.010).