

## SD823C..C SERIES

### FAST RECOVERY DIODES

### Hockey Puk Version


#### Features

- High power FAST recovery diode series
- 2.0 to 3.0  $\mu$ s recovery time
- High voltage ratings up to 2500V
- High current capability
- Optimized turn on and turn off characteristics
- Low forward recovery
- Fast and soft reverse recovery
- Press-puk encapsulation
- Hockey Puk version case style B-43
- Maximum junction temperature 150°C

#### Typical Applications

- Snubber diode for GTO
- High voltage free-wheeling diode
- Fast recovery rectifier applications

810A  
910A



case style B-43

#### Major Ratings and Characteristics

| Parameters       | SD823C..C    |              | Units   |
|------------------|--------------|--------------|---------|
|                  | S20          | S30          |         |
| $I_{F(AV)}$      | 810          | 910          | A       |
| @ $T_{hs}$       | 55           | 55           | °C      |
| $I_{F(RMS)}$     | 1500         | 1690         | A       |
| $I_{FSM}$ @ 50Hz | 9300         | 9600         | A       |
| @ 60Hz           | 9730         | 10050        | A       |
| $V_{RRM}$ range  | 1200 to 2500 | 1200 to 2500 | V       |
| $t_{rr}$         | 2.0          | 3.0          | $\mu$ s |
| @ $T_J$          | 25           | 25           | °C      |
| $T_J$            | - 40 to 150  |              | °C      |

## SD823C..C Series

Bulletin I2074 rev.D 04/00

International  
IOR Rectifier

### ELECTRICAL SPECIFICATIONS

#### Voltage Ratings


| Type number | Voltage Code | $V_{RRM}$ , maximum repetitive peak reverse voltage<br>V | $V_{RSM}$ , maximum non-repetitive peak rev. voltage<br>V | $I_{RRM}$ max.<br>@ $T_J = T_J$ max.<br>mA |
|-------------|--------------|----------------------------------------------------------|-----------------------------------------------------------|--------------------------------------------|
| SD823C..C   | 12           | 1200                                                     | 1300                                                      | 50                                         |
|             | 16           | 1600                                                     | 1700                                                      |                                            |
|             | 20           | 2000                                                     | 2100                                                      |                                            |
|             | 25           | 2500                                                     | 2600                                                      |                                            |

#### Forward Conduction

| Parameter     |                                                            | SD823C..C |           | Units              | Conditions                                                                  |
|---------------|------------------------------------------------------------|-----------|-----------|--------------------|-----------------------------------------------------------------------------|
|               |                                                            | S20       | S30       |                    |                                                                             |
| $I_{F(AV)}$   | Max. average forward current @ heatsink temperature        | 810 (425) | 910 (470) | A                  | 180° conduction, half sine wave                                             |
|               |                                                            | 55 (85)   | 55 (85)   | °C                 | Double side (single side) cooled                                            |
| $I_{F(RMS)}$  | Max. RMS forward current                                   | 1500      | 1690      | A                  | @ 25°C heatsink temperature double side cooled                              |
| $I_{FSM}$     | Max. peak, one-cycle forward, non-repetitive surge current | 9300      | 9600      | A                  | t = 10ms No voltage                                                         |
|               |                                                            | 9730      | 10050     |                    | t = 8.3ms reapplied                                                         |
|               |                                                            | 7820      | 8070      |                    | t = 10ms 100% $V_{RRM}$                                                     |
|               |                                                            | 8190      | 8450      |                    | t = 8.3ms reapplied                                                         |
| $I^2t$        | Maximum $I^2t$ for fusing                                  | 432       | 460       | KA <sup>2</sup> s  | t = 10ms No voltage                                                         |
|               |                                                            | 395       | 420       |                    | t = 8.3ms reapplied                                                         |
|               |                                                            | 306       | 326       |                    | t = 10ms 100% $V_{RRM}$                                                     |
|               |                                                            | 279       | 297       |                    | t = 8.3ms reapplied                                                         |
| $I^2\sqrt{t}$ | Maximum $I^2\sqrt{t}$ for fusing                           | 4320      | 4600      | KA <sup>2</sup> √s | t = 0.1 to 10ms, no voltage reapplied                                       |
| $V_{F(TO)1}$  | Low level value of threshold voltage                       | 1.00      | 0.95      | V                  | (16.7% x $\pi$ x $I_{F(AV)}$ ) < I < $\pi$ x $I_{F(AV)}$ , $T_J = T_J$ max. |
| $V_{F(TO)2}$  | High level value of threshold voltage                      | 1.11      | 1.06      |                    | (I > $\pi$ x $I_{F(AV)}$ ), $T_J = T_J$ max.                                |
| $r_{f1}$      | Low level value of forward slope resistance                | 0.80      | 0.60      | mΩ                 | (16.7% x $\pi$ x $I_{F(AV)}$ ) < I < $\pi$ x $I_{F(AV)}$ , $T_J = T_J$ max. |
| $r_{f2}$      | High level value of forward slope resistance               | 0.76      | 0.57      |                    | (I > $\pi$ x $I_{F(AV)}$ ), $T_J = T_J$ max.                                |
| $V_{FM}$      | Max. forward voltage drop                                  | 2.20      | 1.85      | V                  | $I_{pk} = 1500A$ , $T_J = T_J$ max, $t_p = 10ms$ sinusoidal wave            |

#### Recovery Characteristics

| Code | $T_J = 25^\circ C$<br>Typical $t_{rr}$<br>@ 25% $I_{RRM}$<br>(μs) | Test conditions                 |                 |              | Max. values @ $T_J = 150^\circ C$   |                  |                 |
|------|-------------------------------------------------------------------|---------------------------------|-----------------|--------------|-------------------------------------|------------------|-----------------|
|      |                                                                   | $I_{pk}$<br>Square Pulse<br>(A) | di/dt<br>(A/μs) | $V_r$<br>(V) | $t_{rr}$<br>@ 25% $I_{RRM}$<br>(μs) | $Q_{rr}$<br>(μC) | $I_{rr}$<br>(A) |
| S20  | 2.0                                                               | 1000                            | 50              | -50          | 3.5                                 | 240              | 110             |
| S30  | 3.0                                                               | 1000                            | 50              | -50          | 5.0                                 | 380              | 130             |



### Thermal and Mechanical Specifications

| Parameter           |                                                    | SD823C..C      |     | Units     | Conditions                                                       |
|---------------------|----------------------------------------------------|----------------|-----|-----------|------------------------------------------------------------------|
|                     |                                                    | S20            | S30 |           |                                                                  |
| T <sub>J</sub>      | Max. junction operating temperature range          | -40 to 150     |     | °C        |                                                                  |
| T <sub>stg</sub>    | Max. storage temperature range                     | -40 to 150     |     |           |                                                                  |
| R <sub>thJ-hs</sub> | Max. thermal resistance, case junction to heatsink | 0.076<br>0.038 |     | K/W       | DCoperation single side cooled<br>DCoperation double side cooled |
| F                   | Mounting force, ± 10%                              | 9800<br>(1000) |     | N<br>(Kg) |                                                                  |
| wt                  | Approximate weight                                 | 83             |     | g         |                                                                  |
| Case style          |                                                    | B-43           |     |           | See Outline Table                                                |

### $\Delta R_{thJ-hs}$ Conduction

(The following table shows the increment of thermal resistance  $R_{thJ-hs}$  when devices operate at different conduction angles than DC)

| Conduction angle | Sinusoidal conduction |             | Rectangular conduction |             | Units | Conditions               |
|------------------|-----------------------|-------------|------------------------|-------------|-------|--------------------------|
|                  | Single Side           | Double Side | Single Side            | Double Side |       |                          |
| 180°             | 0.007                 | 0.007       | 0.005                  | 0.005       | K/W   | $T_J = T_J \text{ max.}$ |
| 120°             | 0.008                 | 0.008       | 0.008                  | 0.008       |       |                          |
| 90°              | 0.010                 | 0.010       | 0.011                  | 0.011       |       |                          |
| 60°              | 0.015                 | 0.015       | 0.016                  | 0.016       |       |                          |
| 30°              | 0.026                 | 0.026       | 0.026                  | 0.026       |       |                          |

### Ordering Information Table

| Device Code |                                                                    |          |          |           |            |          |
|-------------|--------------------------------------------------------------------|----------|----------|-----------|------------|----------|
| <b>SD</b>   | <b>82</b>                                                          | <b>3</b> | <b>C</b> | <b>25</b> | <b>S20</b> | <b>C</b> |
| ①           | ②                                                                  | ③        | ④        | ⑤         | ⑥          | ⑦        |
| <b>1</b>    | - Diode                                                            |          |          |           |            |          |
| <b>2</b>    | - Essential part number                                            |          |          |           |            |          |
| <b>3</b>    | - 3 = Fast recovery                                                |          |          |           |            |          |
| <b>4</b>    | - C = Ceramic Puk                                                  |          |          |           |            |          |
| <b>5</b>    | - Voltage code: Code x 100 = $V_{RRM}$ (See Voltage Ratings table) |          |          |           |            |          |
| <b>6</b>    | - $t_{rr}$ code                                                    |          |          |           |            |          |
| <b>7</b>    | - C = Puk Case B-43                                                |          |          |           |            |          |

SD823C..C Series

Bulletin I2074 rev.D 04/00

Outline Table

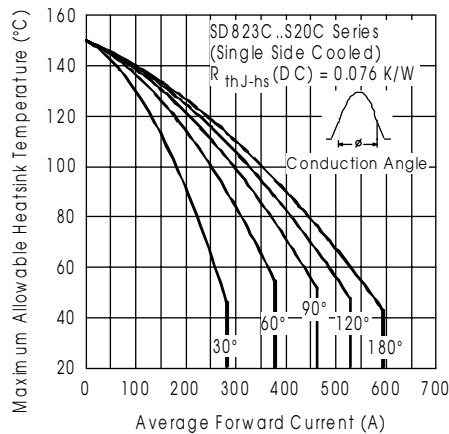
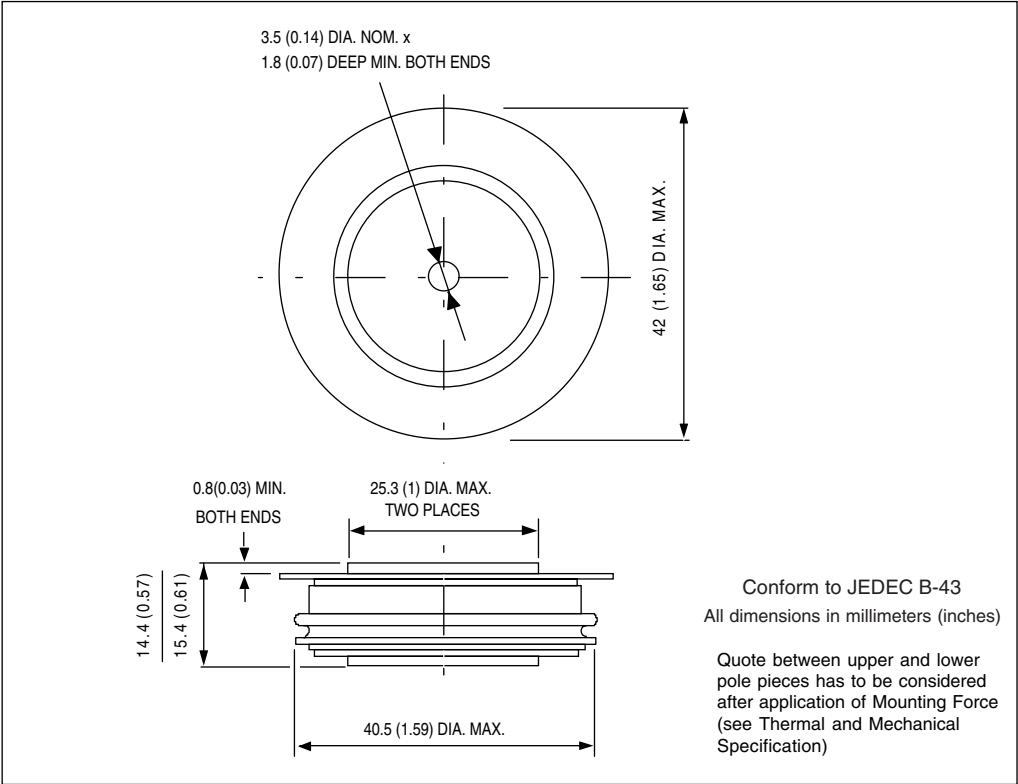


Fig. 1 - Current Ratings Characteristics

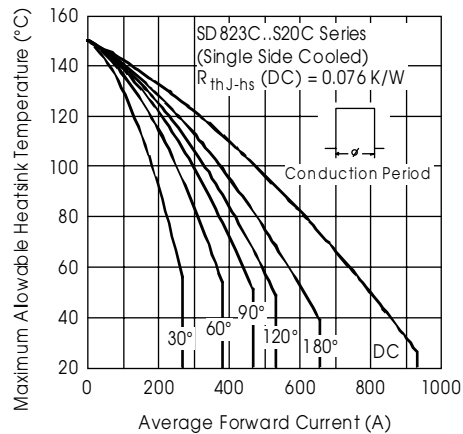


Fig. 2 - Current Ratings Characteristics

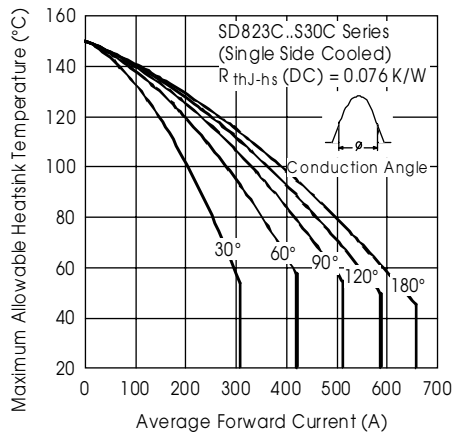


Fig. 3 - Current Ratings Characteristics

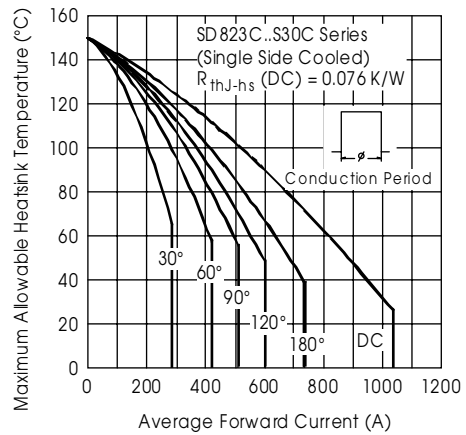


Fig. 4 - Current Ratings Characteristics

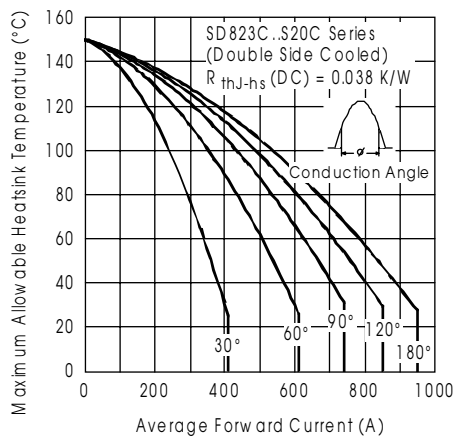


Fig. 5 - Current Ratings Characteristics

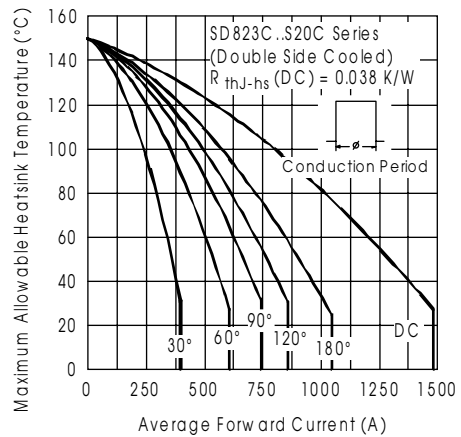


Fig. 6 - Current Ratings Characteristics

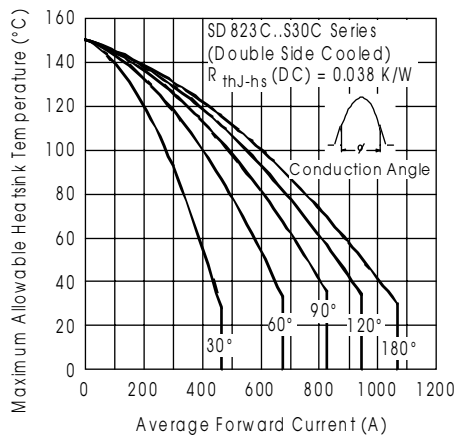


Fig. 7 - Current Ratings Characteristics

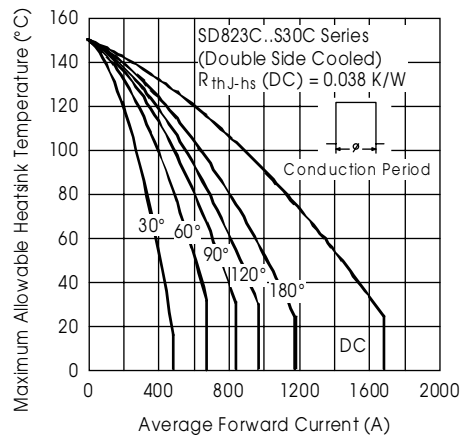


Fig. 8 - Current Ratings Characteristics

## SD823C..C Series

Bulletin I2074 rev. D 04/00

International  
**IR** Rectifier

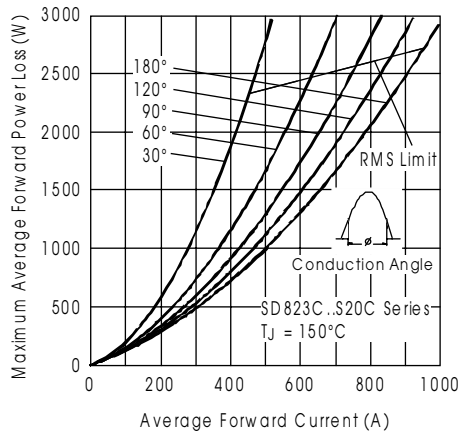


Fig. 9 - Forward Power Loss Characteristics

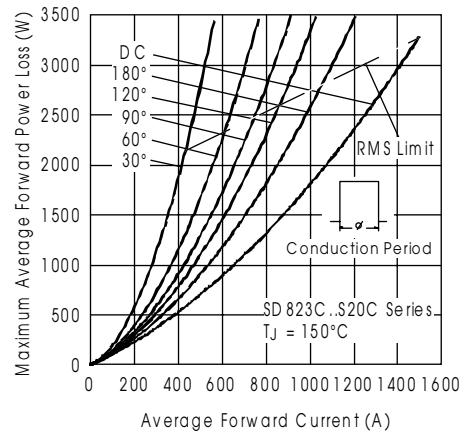


Fig. 10 - Forward Power Loss Characteristics

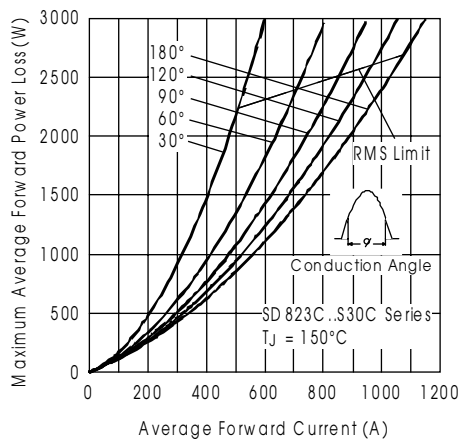


Fig. 11 - Forward Power Loss Characteristics

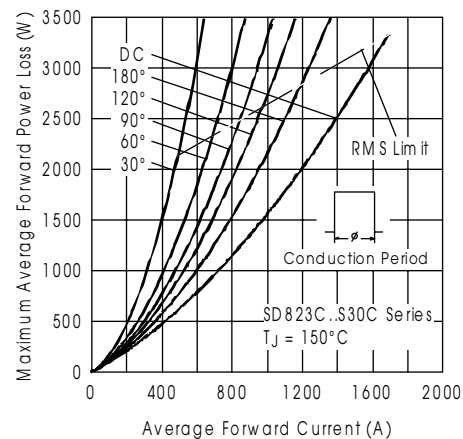


Fig. 12 - Forward Power Loss Characteristics

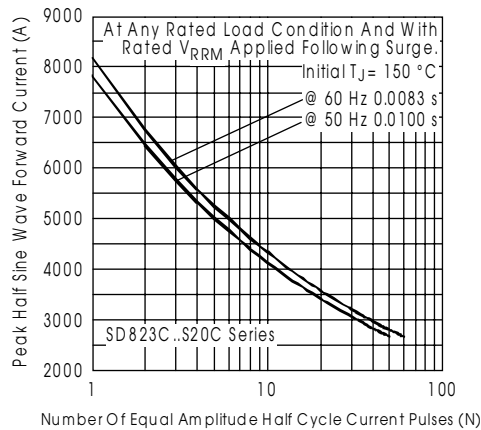


Fig. 13 - Maximum Non-repetitive Surge Current

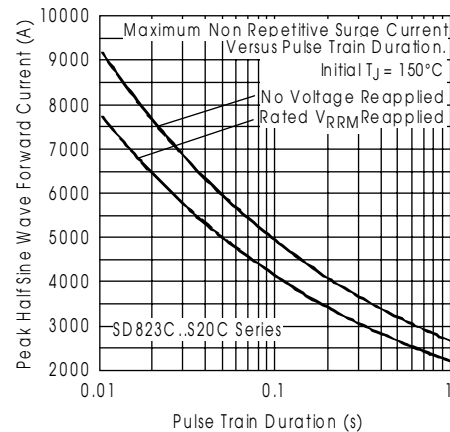


Fig. 14 - Maximum Non-repetitive Surge Current

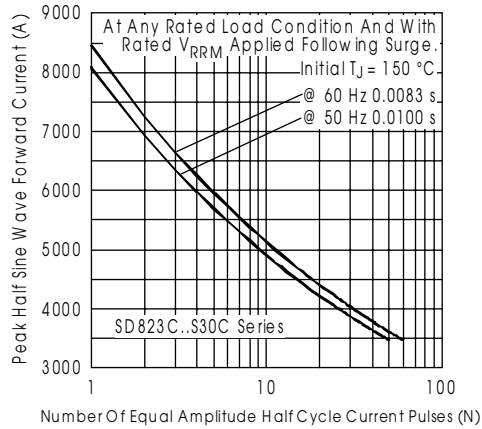


Fig. 15 - Maximum Non-repetitive Surge Current

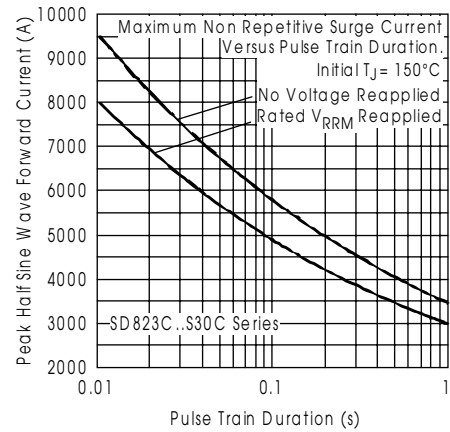


Fig. 16 - Maximum Non-repetitive Surge Current

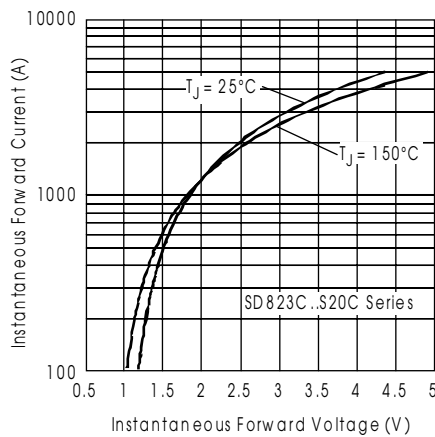


Fig. 17 - Forward Voltage Drop Characteristics

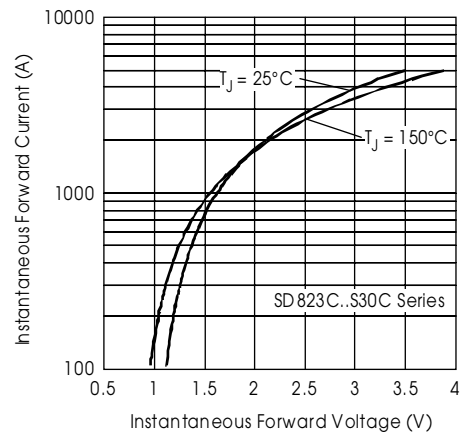


Fig. 18 - Forward Voltage Drop Characteristics

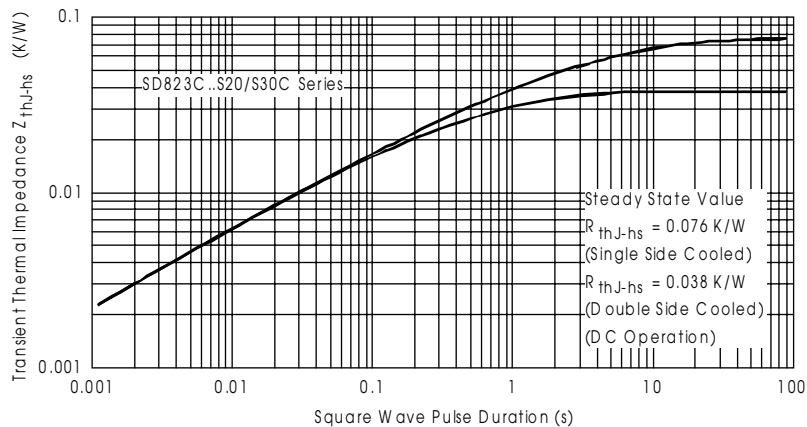


Fig. 19 - Thermal Impedance  $Z_{thJ-hs}$  Characteristic

## SD823C..C Series

Bulletin I2074 rev. D 04/00

International  
**IR** Rectifier

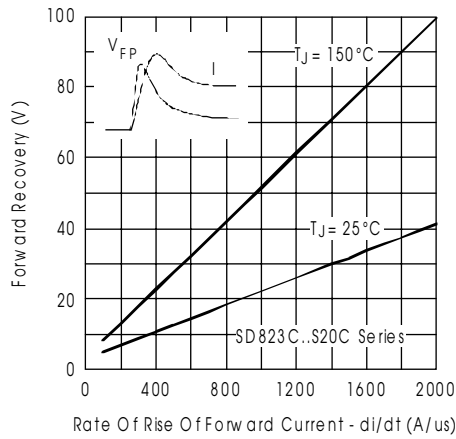


Fig. 20 - Typical Forward Recovery Characteristics

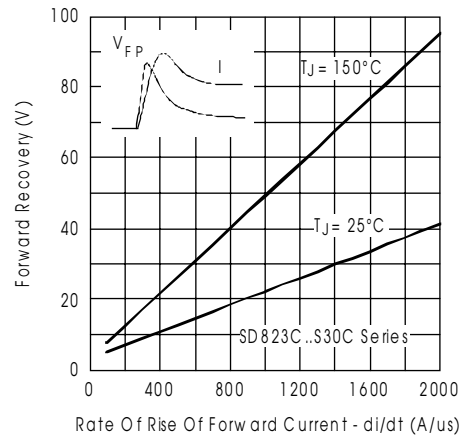


Fig. 21 - Typical Forward Recovery Characteristics

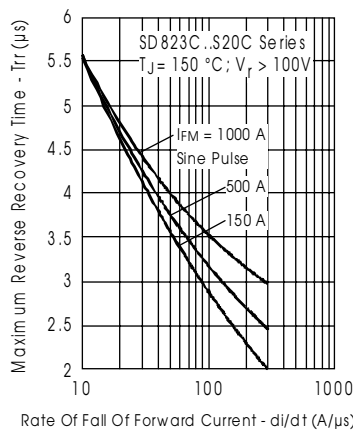


Fig. 22 - Recovery Time Characteristics

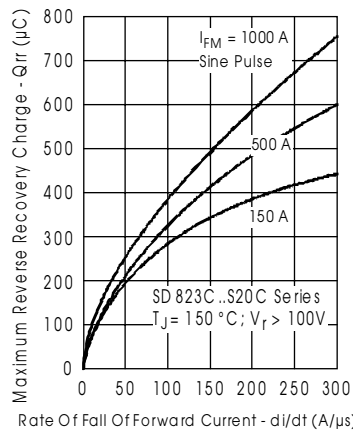


Fig. 23 - Recovery Charge Characteristics

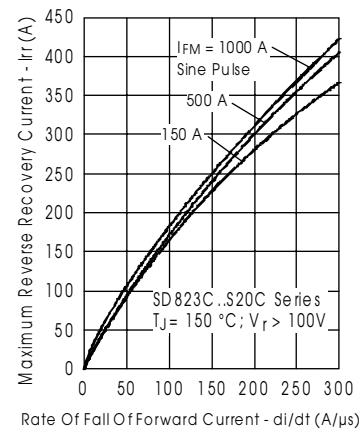


Fig. 24 - Recovery Current Characteristics

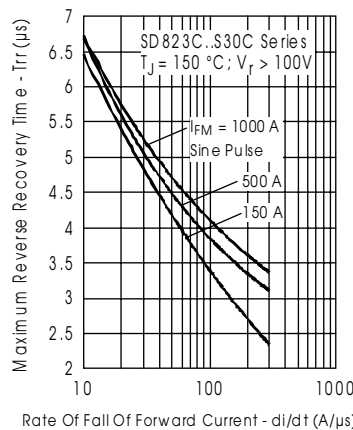


Fig. 25 - Recovery Time Characteristics

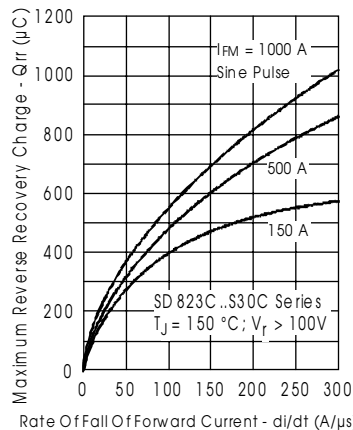


Fig. 26 - Recovery Charge Characteristics

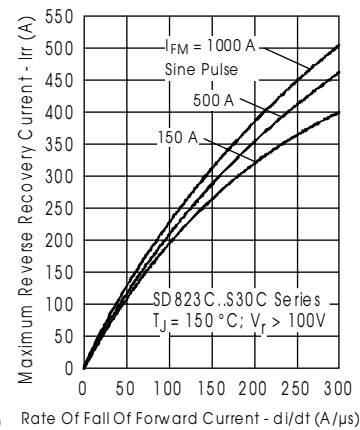


Fig. 27 - Recovery Current Characteristics



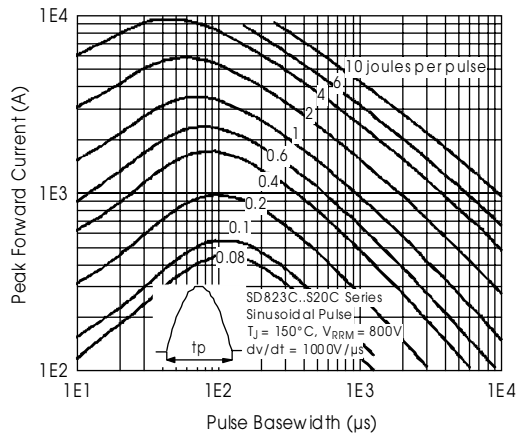


Fig. 28 - Maximum Total Energy Loss Per Pulse Characteristics

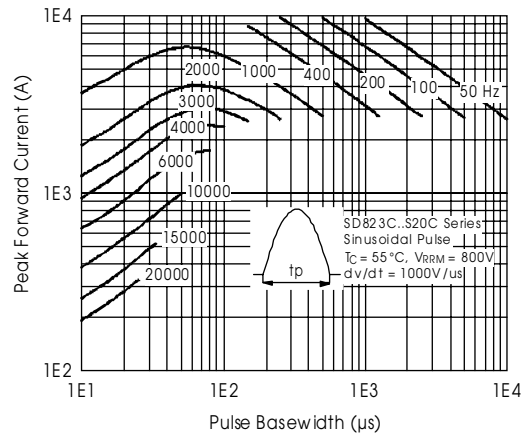


Fig. 29 - Frequency Characteristics

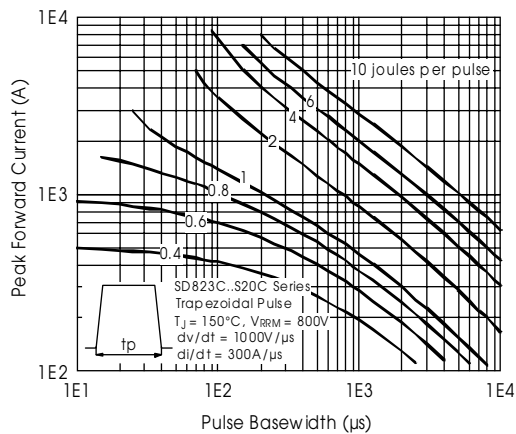


Fig. 30 - Maximum Total Energy Loss Per Pulse Characteristics

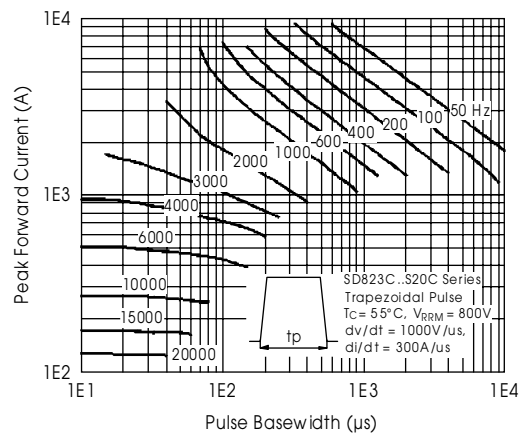


Fig. 31 - Frequency Characteristics

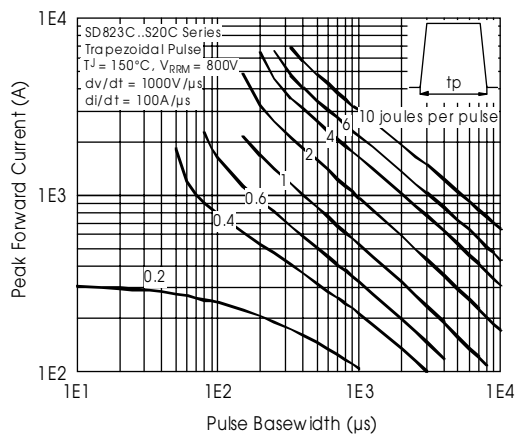


Fig. 32 - Maximum Total Energy Loss Per Pulse Characteristics

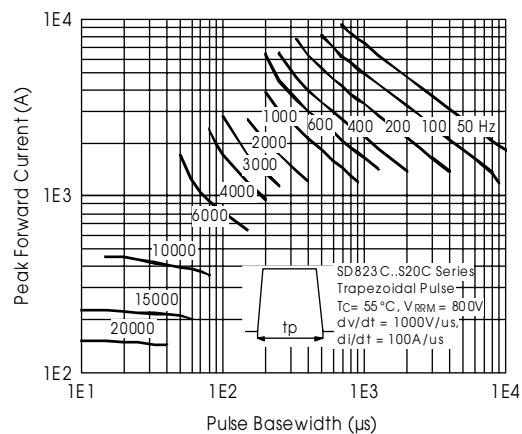


Fig. 33 - Frequency Characteristics

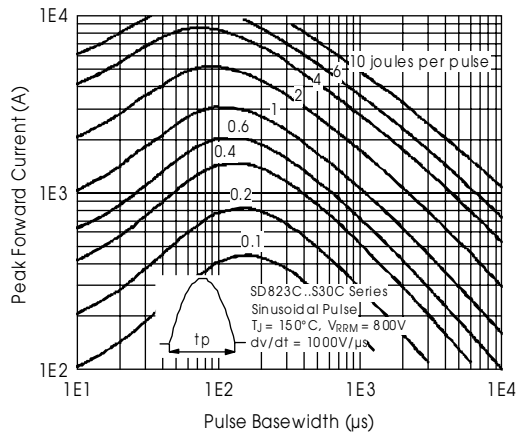


Fig. 34 - Maximum Total Energy Loss Per Pulse Characteristics

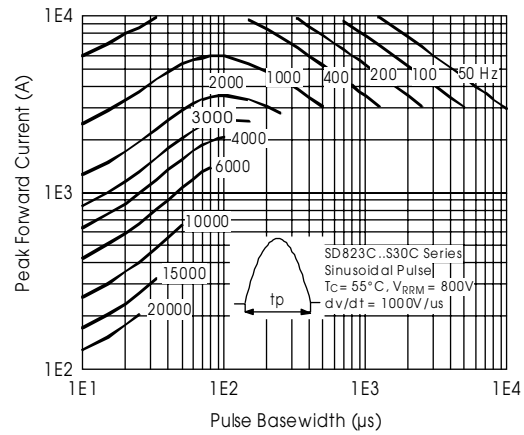


Fig. 35 - Frequency Characteristics

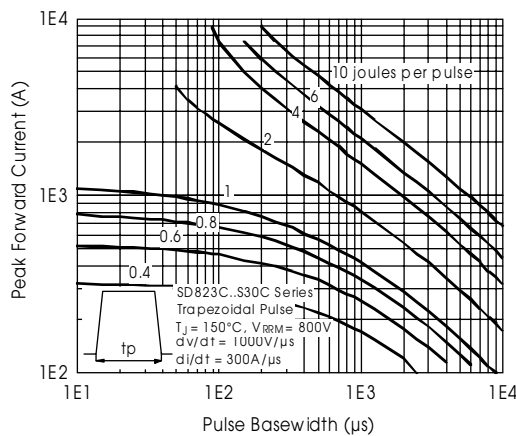


Fig. 36 - Maximum Total Energy Loss Per Pulse Characteristics

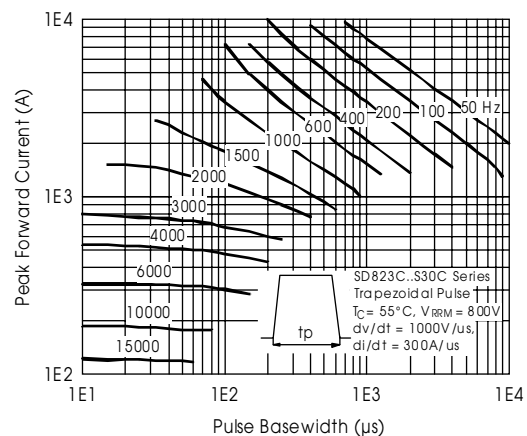


Fig. 37 - Frequency Characteristics

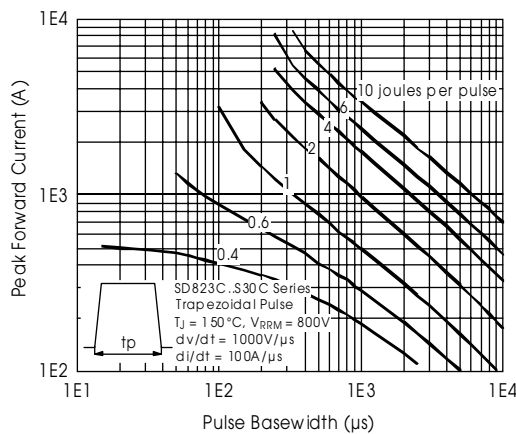


Fig. 38 - Maximum Total Energy Loss Per Pulse Characteristics

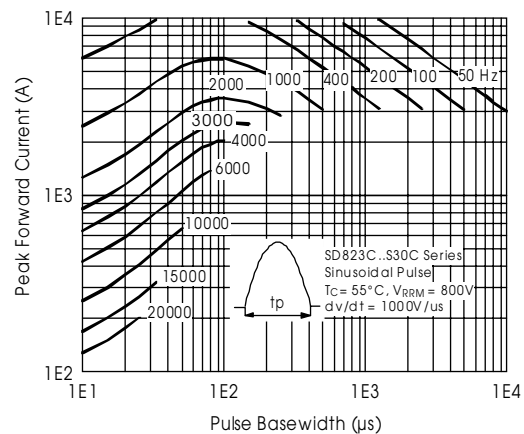


Fig. 39 - Frequency Characteristics