



## STB16NB25

### N - CHANNEL 250V - 0.220Ω - 16A - TO-263 PowerMESH™ MOSFET

| TYPE      | V <sub>DSS</sub> | R <sub>DS(on)</sub> | I <sub>D</sub> |
|-----------|------------------|---------------------|----------------|
| STB16NB25 | 250 V            | < 0.28 Ω            | 16 A           |

- TYPICAL R<sub>DS(on)</sub> = 0.220 Ω
- 100% AVALANCHE TESTED
- VERY LOW INTRINSIC CAPACITANCES
- GATE CHARGE MINIMIZED
- EXTREMELY HIGH dv/dt CAPABILITY
- FOR THROUGH-HOLE VERSION CONTACT SALES OFFICE
- ADD SUFFIX "T4" FOR ORDERING IN TAPE & REEL

#### DESCRIPTION

Using the latest high voltage MESH OVERLAY™ process, STMicroelectronics has designed an advanced family of power MOSFETs with outstanding performances. The new patent pending strip layout coupled with the Company's proprietary edge termination structure, gives the lowest R<sub>DS(on)</sub> per area, exceptional avalanche and dv/dt capabilities and unrivalled gate charge and switching characteristics.

#### APPLICATIONS


- HIGH CURRENT, HIGH SPEED SWITCHING
- UNINTERRUPTIBLE POWER SUPPLY (UPS)
- DC-AC CONVERTERS FOR WELDING EQUIPMENT AND UNINTERRUPTIBLE POWER SUPPLIES AND MOTOR DRIVE

#### ABSOLUTE MAXIMUM RATINGS

| Symbol              | Parameter                                             | Value      | Unit |
|---------------------|-------------------------------------------------------|------------|------|
| V <sub>DS</sub>     | Drain-source Voltage (V <sub>GS</sub> = 0)            | 250        | V    |
| V <sub>DGR</sub>    | Drain- gate Voltage (R <sub>GS</sub> = 20 kΩ)         | 250        | V    |
| V <sub>GS</sub>     | Gate-source Voltage                                   | ± 30       | V    |
| I <sub>D</sub>      | Drain Current (continuous) at T <sub>c</sub> = 25 °C  | 16         | A    |
| I <sub>D</sub>      | Drain Current (continuous) at T <sub>c</sub> = 100 °C | 10         | A    |
| I <sub>DM</sub> (•) | Drain Current (pulsed)                                | 64         | A    |
| P <sub>tot</sub>    | Total Dissipation at T <sub>c</sub> = 25 °C           | 140        | W    |
|                     | Derating Factor                                       | 1.12       | W/°C |
| dv/dt(1)            | Peak Diode Recovery voltage slope                     | 5.5        | V/ns |
| T <sub>stg</sub>    | Storage Temperature                                   | -65 to 150 | °C   |
| T <sub>j</sub>      | Max. Operating Junction Temperature                   | 150        | °C   |


(•) Pulse width limited by safe operating area

(1) I<sub>SD</sub> ≤ 16A, di/dt ≤ 200 A/μs, V<sub>DD</sub> ≤ V<sub>(BR)DSS</sub>, T<sub>j</sub> ≤ T<sub>JMAX</sub>



**D<sup>2</sup>PAK  
TO-263**  
(suffix "T4")

#### INTERNAL SCHEMATIC DIAGRAM



## THERMAL DATA

|                |                                                |     |      |               |
|----------------|------------------------------------------------|-----|------|---------------|
| $R_{thj-case}$ | Thermal Resistance Junction-case               | Max | 0.9  | $^{\circ}C/W$ |
| $R_{thj-amb}$  | Thermal Resistance Junction-ambient            | Max | 62.5 | $^{\circ}C/W$ |
| $R_{thc-sink}$ | Thermal Resistance Case-sink                   | Typ | 0.5  | $^{\circ}C/W$ |
| $T_I$          | Maximum Lead Temperature For Soldering Purpose |     | 300  | $^{\circ}C$   |

## AVALANCHE CHARACTERISTICS

| Symbol   | Parameter                                                                                        | Max Value | Unit |
|----------|--------------------------------------------------------------------------------------------------|-----------|------|
| $I_{AR}$ | Avalanche Current, Repetitive or Not-Repetitive (pulse width limited by $T_j$ max)               | 16        | A    |
| $E_{AS}$ | Single Pulse Avalanche Energy (starting $T_j = 25^{\circ}C$ , $I_D = I_{AR}$ , $V_{DD} = 50 V$ ) | 250       | mJ   |

ELECTRICAL CHARACTERISTICS ( $T_{case} = 25^{\circ}C$  unless otherwise specified)

OFF

| Symbol        | Parameter                                        | Test Conditions                                                                   | Min. | Typ. | Max.      | Unit               |
|---------------|--------------------------------------------------|-----------------------------------------------------------------------------------|------|------|-----------|--------------------|
| $V_{(BR)DSS}$ | Drain-source Breakdown Voltage                   | $I_D = 250 \mu A$ $V_{GS} = 0$                                                    | 250  |      |           | V                  |
| $I_{DSS}$     | Zero Gate Voltage Drain Current ( $V_{GS} = 0$ ) | $V_{DS} = \text{Max Rating}$<br>$V_{DS} = \text{Max Rating}$ $T_c = 125^{\circ}C$ |      |      | 1<br>10   | $\mu A$<br>$\mu A$ |
| $I_{GSS}$     | Gate-body Leakage Current ( $V_{DS} = 0$ )       | $V_{GS} = \pm 30 V$                                                               |      |      | $\pm 100$ | nA                 |

ON (\*)

| Symbol       | Parameter                         | Test Conditions                                              | Min. | Typ. | Max. | Unit     |
|--------------|-----------------------------------|--------------------------------------------------------------|------|------|------|----------|
| $V_{GS(th)}$ | Gate Threshold Voltage            | $V_{DS} = V_{GS}$ $I_D = 250 \mu A$                          | 3    | 4    | 5    | V        |
| $R_{DS(on)}$ | Static Drain-source On Resistance | $V_{GS} = 10V$ $I_D = 8 A$                                   |      | 0.22 | 0.28 | $\Omega$ |
| $I_{D(on)}$  | On State Drain Current            | $V_{DS} > I_{D(on)} \times R_{DS(on)max}$<br>$V_{GS} = 10 V$ | 16   |      |      | A        |

## DYNAMIC

| Symbol                              | Parameter                                                               | Test Conditions                                       | Min. | Typ.              | Max. | Unit           |
|-------------------------------------|-------------------------------------------------------------------------|-------------------------------------------------------|------|-------------------|------|----------------|
| $g_{fs} (*)$                        | Forward Transconductance                                                | $V_{DS} > I_{D(on)} \times R_{DS(on)max}$ $I_D = 8 A$ |      | 4                 |      | S              |
| $C_{iss}$<br>$C_{oss}$<br>$C_{rss}$ | Input Capacitance<br>Output Capacitance<br>Reverse Transfer Capacitance | $V_{DS} = 25 V$ $f = 1 MHz$ $V_{GS} = 0$              |      | 1000<br>250<br>40 |      | pF<br>pF<br>pF |

**ELECTRICAL CHARACTERISTICS** (continued)**SWITCHING ON**

| Symbol      | Parameter          | Test Conditions                                                            | Min. | Typ. | Max. | Unit |
|-------------|--------------------|----------------------------------------------------------------------------|------|------|------|------|
| $t_{d(on)}$ | Turn-on Delay Time | $V_{DD} = 125\text{ V}$ $I_D = 8\text{ A}$                                 |      | 12   |      | ns   |
| $t_r$       | Rise Time          | $R_G = 4.7\ \Omega$ $V_{GS} = 10\text{ V}$<br>(Resistive Load, see fig. 3) |      | 12   |      | ns   |
| $Q_g$       | Total Gate Charge  | $V_{DD} = 200\text{ V}$ $I_D = 16\text{ A}$ $V_{GS} = 10\text{ V}$         |      | 29   | 38   | nC   |
| $Q_{gs}$    | Gate-Source Charge |                                                                            |      | 9    |      | nC   |
| $Q_{gd}$    | Gate-Drain Charge  |                                                                            |      | 11   |      | nC   |

**SWITCHING OFF**



| Symbol         | Parameter             | Test Conditions                                                            | Min. | Typ. | Max. | Unit |
|----------------|-----------------------|----------------------------------------------------------------------------|------|------|------|------|
| $t_{d(off)}$   | Turn-off Delay Time   | $V_{DD} = 125\text{ V}$ $I_D = 8\text{ A}$                                 |      | 35   |      | ns   |
| $t_f$          | Fall Time             | $R_G = 4.7\ \Omega$ $V_{GS} = 10\text{ V}$<br>(Resistive Load, see fig. 3) |      | 8    |      | ns   |
| $t_r(V_{off})$ | Off-voltage Rise Time | $V_{CLAMP} = 200\text{ V}$ $I_D = 16\text{ A}$                             |      | 10   |      | ns   |
| $t_f$          | Fall Time             | $R_G = 4.7\ \Omega$ $V_{GS} = 10\text{ V}$                                 |      | 9    |      | ns   |
| $t_c$          | Cross-over Time       | (Inductive Load, see fig. 5)                                               |      | 20   |      | ns   |

**SOURCE DRAIN DIODE**


| Symbol             | Parameter                     | Test Conditions                                                                                                                                     | Min. | Typ. | Max. | Unit          |
|--------------------|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|------|------|------|---------------|
| $I_{SD}$           | Source-drain Current          |                                                                                                                                                     |      |      | 16   | A             |
| $I_{SDM}(\bullet)$ | Source-drain Current (pulsed) |                                                                                                                                                     |      |      | 64   | A             |
| $V_{SD}(\ast)$     | Forward On Voltage            | $I_{SD} = 16\text{ A}$ $V_{GS} = 0$                                                                                                                 |      |      | 1.5  | V             |
| $t_{rr}$           | Reverse Recovery Time         | $I_{SD} = 16\text{ A}$ $di/dt = 100\text{ A}/\mu\text{s}$<br>$V_{DD} = 50\text{ V}$ $T_J = 150\text{ }^\circ\text{C}$<br>(see test circuit, fig. 5) |      | 210  |      | ns            |
| $Q_{rr}$           | Reverse Recovery Charge       |                                                                                                                                                     |      | 1.5  |      | $\mu\text{C}$ |
| $I_{RRM}$          | Reverse Recovery Current      |                                                                                                                                                     |      | 14   |      | A             |

(\*) Pulsed: Pulse duration = 300  $\mu\text{s}$ , duty cycle 1.5 %


(•) Pulse width limited by safe operating area

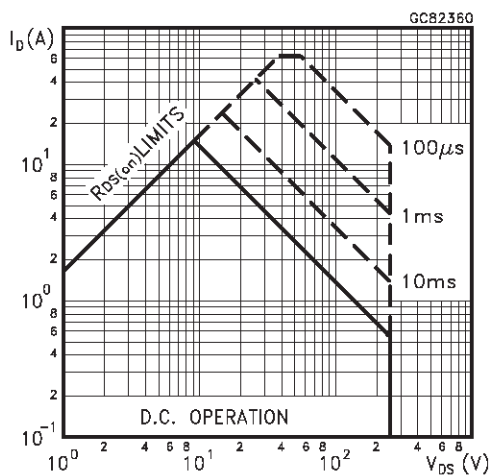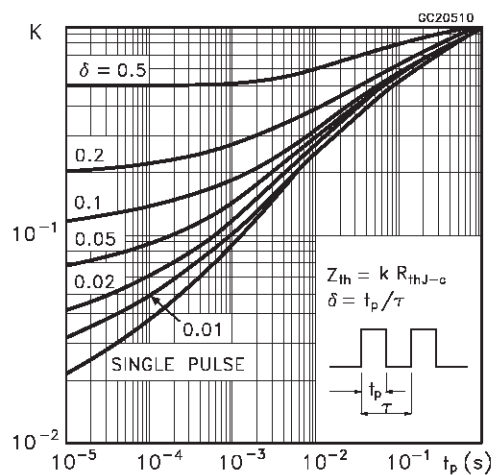**Safe Operating Area****Thermal Impedance**


Output Characteristics

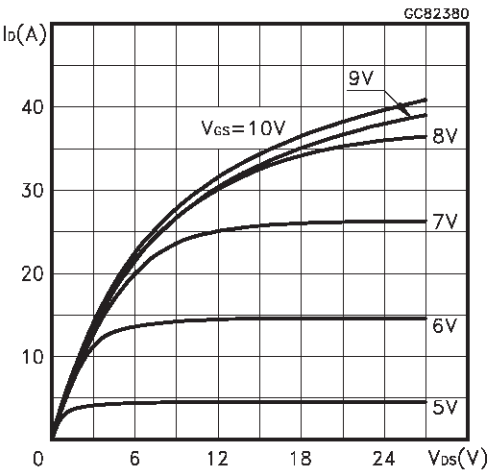


Transfer Characteristics

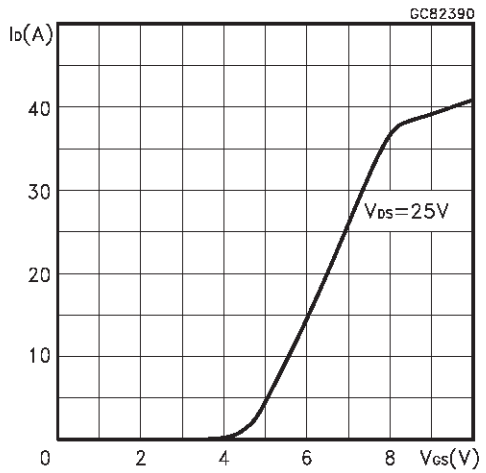


Transconductance

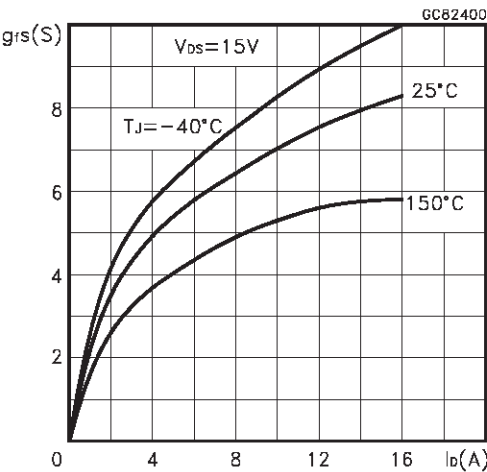


Static Drain-source On Resistance

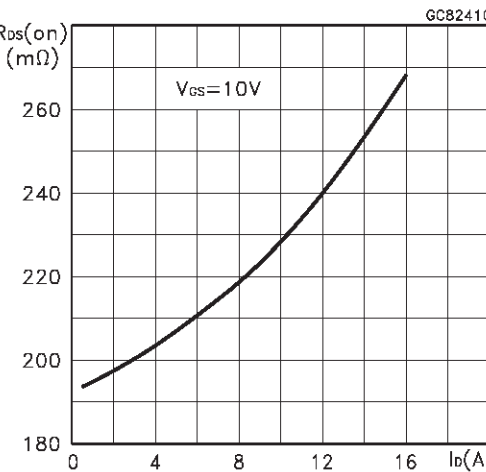


Gate Charge vs Gate-source Voltage

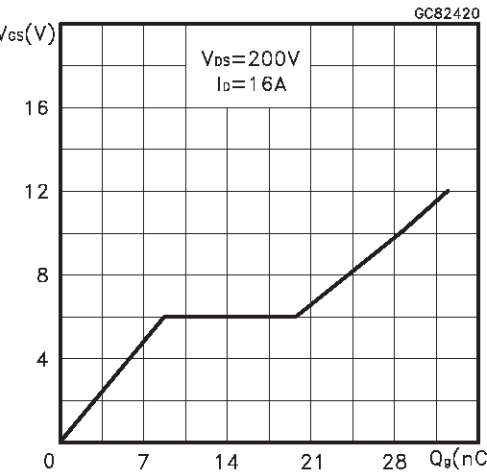


Capacitance Variations

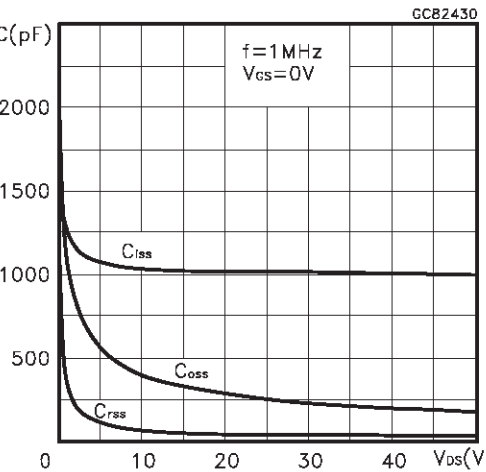

Normalized Gate Threshold Voltage vs Temperature

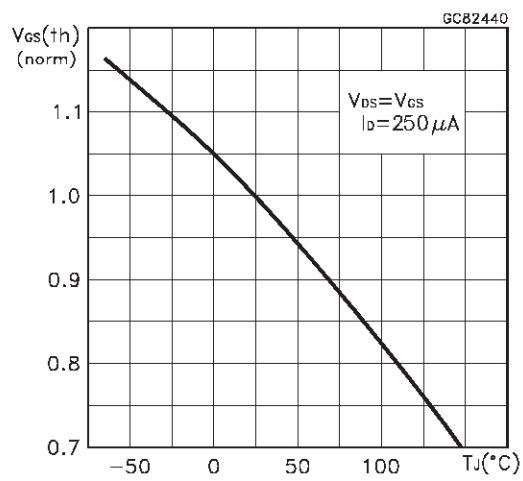

Normalized On Resistance vs Temperature

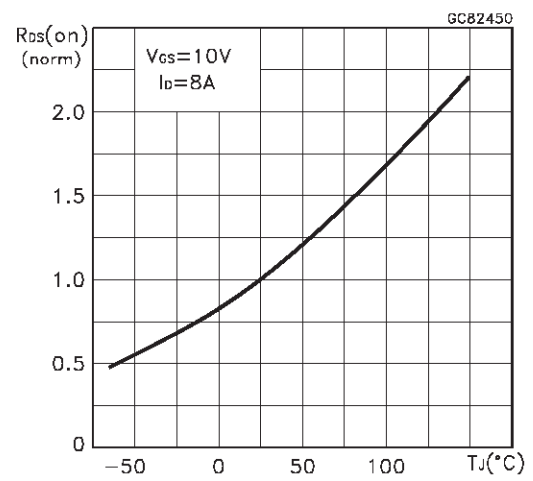

Source-drain Diode Forward Characteristics

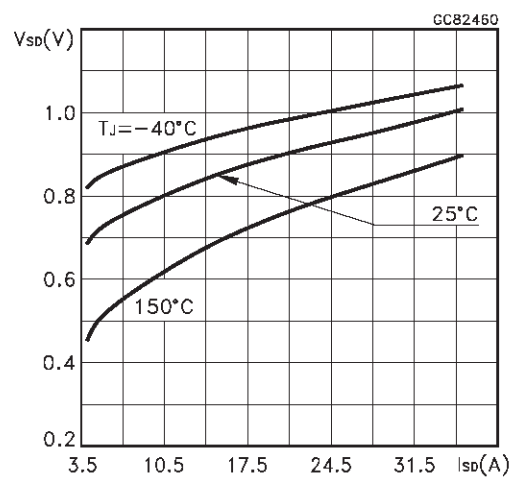


Fig. 1: Unclamped Inductive Load Test Circuit



Fig. 2: Unclamped Inductive Waveform



Fig. 3: Switching Times Test Circuits For Resistive Load



Fig. 4: Gate Charge test Circuit

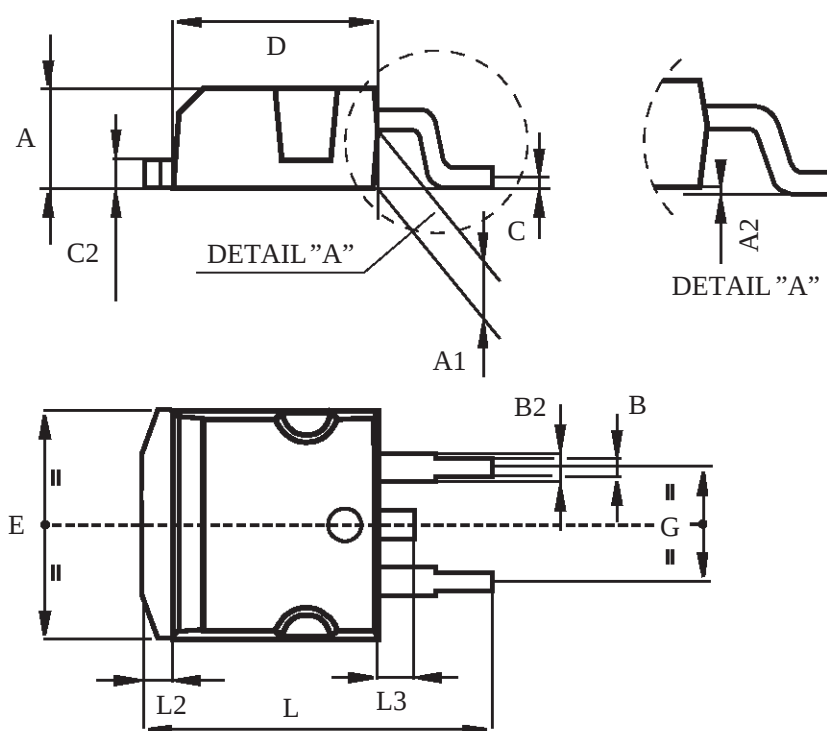


Fig. 5: Test Circuit For Inductive Load Switching And Diode Recovery Times



TO-263 (D<sup>2</sup>PAK) MECHANICAL DATA

| DIM. | mm   |      |       | inch  |      |       |
|------|------|------|-------|-------|------|-------|
|      | MIN. | TYP. | MAX.  | MIN.  | TYP. | MAX.  |
| A    | 4.4  |      | 4.6   | 0.173 |      | 0.181 |
| A1   | 2.49 |      | 2.69  | 0.098 |      | 0.106 |
| B    | 0.7  |      | 0.93  | 0.027 |      | 0.036 |
| B2   | 1.14 |      | 1.7   | 0.044 |      | 0.067 |
| C    | 0.45 |      | 0.6   | 0.017 |      | 0.023 |
| C2   | 1.21 |      | 1.36  | 0.047 |      | 0.053 |
| D    | 8.95 |      | 9.35  | 0.352 |      | 0.368 |
| E    | 10   |      | 10.4  | 0.393 |      | 0.409 |
| G    | 4.88 |      | 5.28  | 0.192 |      | 0.208 |
| L    | 15   |      | 15.85 | 0.590 |      | 0.624 |
| L2   | 1.27 |      | 1.4   | 0.050 |      | 0.055 |
| L3   | 1.4  |      | 1.75  | 0.055 |      | 0.068 |



P011P6/E

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a trademark of STMicroelectronics

© 1999 STMicroelectronics – Printed in Italy – All Rights Reserved  
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Italy - Japan - Korea - Malaysia - Malta - Mexico - Morocco - The Netherlands -  
Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.