

6R150E(50A)

POWER DIODE MODULE

600V,800V / 50A

6 in one-package


■ Features

- Glass Passivation Chip
- Easy Connection
- Insulated Type


■ Applications

- Inverters
- Battery Chargers
- DC Motors
- General Purpose DC Power Supplies

■ Outline Drawings, mm

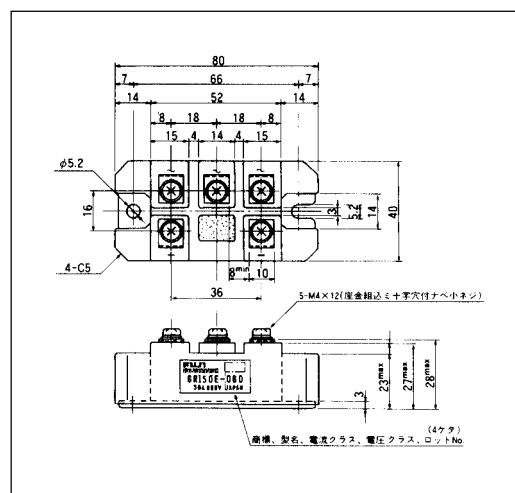

■ Inner Circuit Schematic

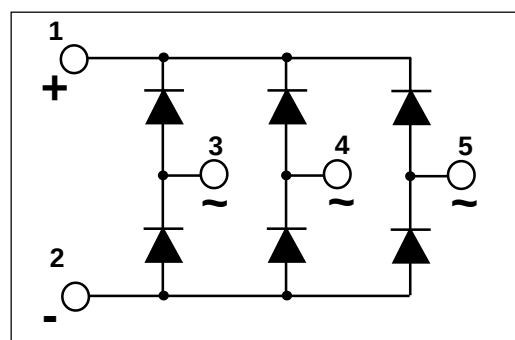

■ Maximum ratings and characteristics

- Absolute maximum ratings

Item	Symbol	Conditions	Rating		Unit
			-060	-080	
Repetitive peak reverse voltage	V _{RRM}		600	800	V
Non-repetitive peak reverse voltage	V _{RSM}		660	880	V
Average output current	I _O	50/60Hz Sine wave, Tc=102°C	50		A
Surge current	I _{FSM}	From rated load, Sine wave 10ms	480		A
I ² t	I ² t	From rated load	920		A ² s
Operating junction temperature	T _j		-40 to +150		°C
Storage temperature	T _{stg}		-40 to +125		°C
Isolation voltage	V _{is}		AC2000(1min.)		V
Screw torque			1.7 *1		N·m

*1: Recommendable value : 1.3 to 1.7 N·m(M4)

●Electrical characteristics (Ta=25°C Unless otherwise specified)

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Forward voltage drop	V_{FM}	$T_J=25^{\circ}C, I_{FM}=50A$			1.20	V
Reverse current	I_{RRM}	$T_J=150^{\circ}C, V_R=V_{RRM}$			5.0	mA


● Thermal Characteristics

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Thermal resistance	$R_{th(j-c)}$	Junction to case			0.42	°C/W
	$R_{th(c-f)}$	the base to cooling fin *			0.10	°C/W


* : With Thermal Compound

■ Characteristics


Forward Characteristics

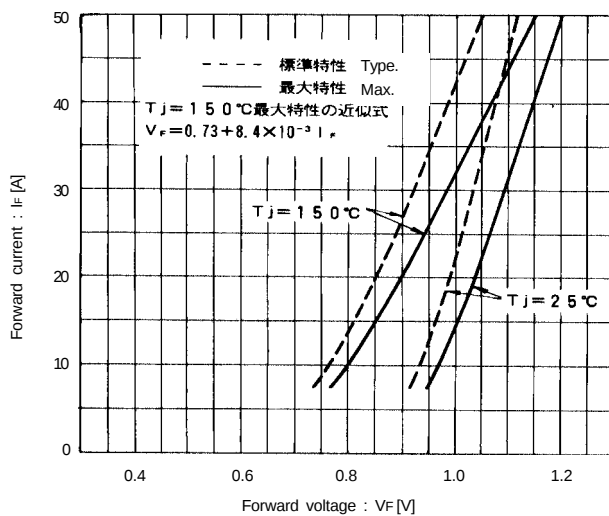


Forward Average Current vs. Power Loss

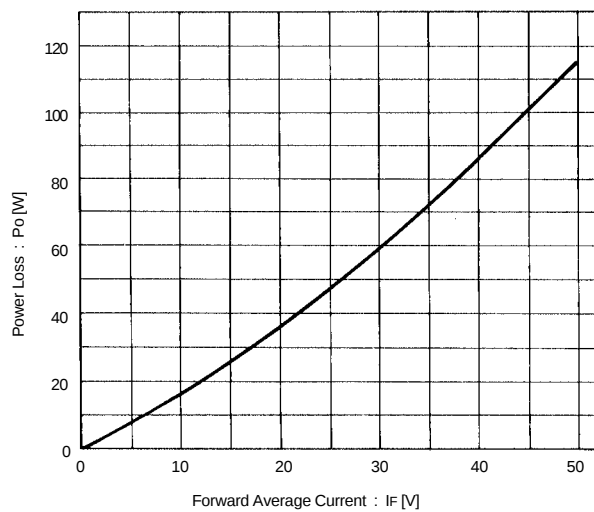

Forward Average Current vs. Case Temperature

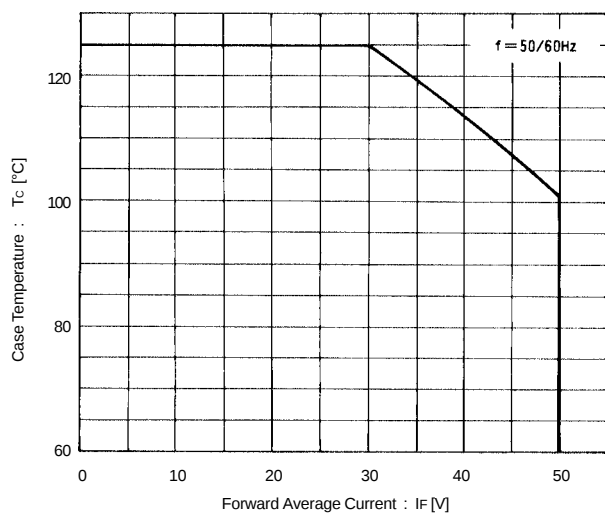

Surge Current

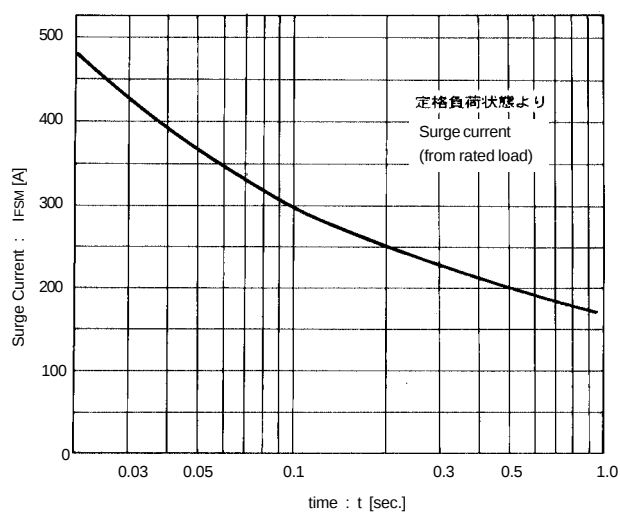

Transient Thermal Impedance

