


Rack and Panel Connectors

Side Mount

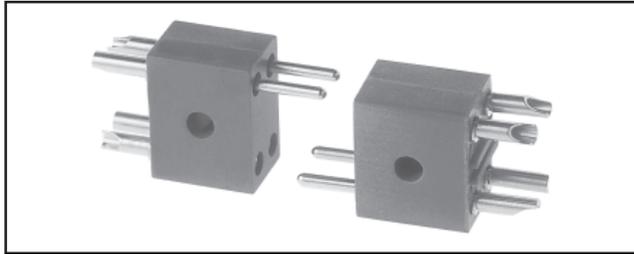

FEATURES

- Body components available with any desired pin and socket combination.
- Floating contacts.
- Polarization accomplished by reversed pin and socket combination.
- Model A20 has barriers for increased creepage distance.
- Thru hole permits use of building block technique or flat mounting.
- Meets applicable paragraphs of MIL-C-28748.

APPLICATIONS

Broad - limited only by those applications requiring physical, electrical and/or materials specifications exceeding those indicated.

ELECTRICAL SPECIFICATIONS

Breakdown Voltage (Contact to Contact):

At sea level: 2000 V RMS.

At 70,000 feet [21,336 meters]: 500 V RMS.

Current Rating: 7.5 amps.

MATERIAL SPECIFICATIONS

Standard Body: Glass-filled diallyl phthalate per MIL-M-14, type GDI-30F green.

Pin Contacts: Brass, gold plated.

Socket Contacts: Phosphor bronze, gold plated.

PHYSICAL SPECIFICATIONS

Minimum Creepage Path between Contacts:

A20 = 0.08" [2.03mm]; WA20 = 0.05" [1.27mm].

Minimum Air Space between Contacts:


A20 = 0.08" [2.03mm]; WA20 = 0.05" [1.27mm].

Contact, Center to Center: A20 = 0.150" [3.18mm];


WA20 = 0.125" [3.17mm].

DIMENSIONAL CONFIGURATIONS [Numbers in brackets indicate millimeters]

A20P-CD

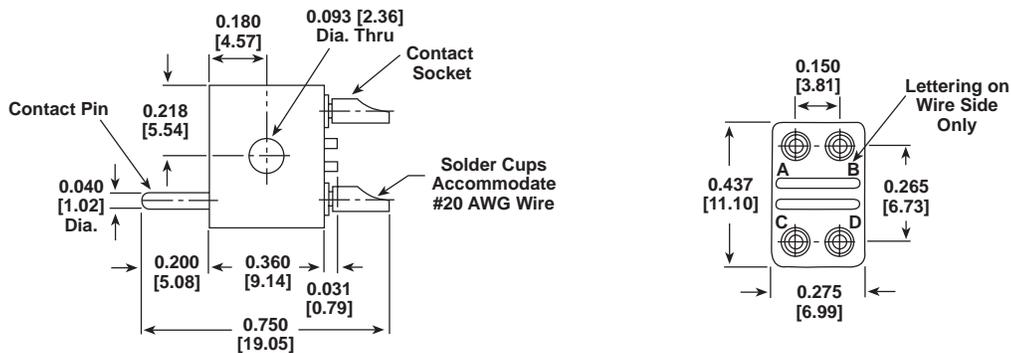



A20S-CD

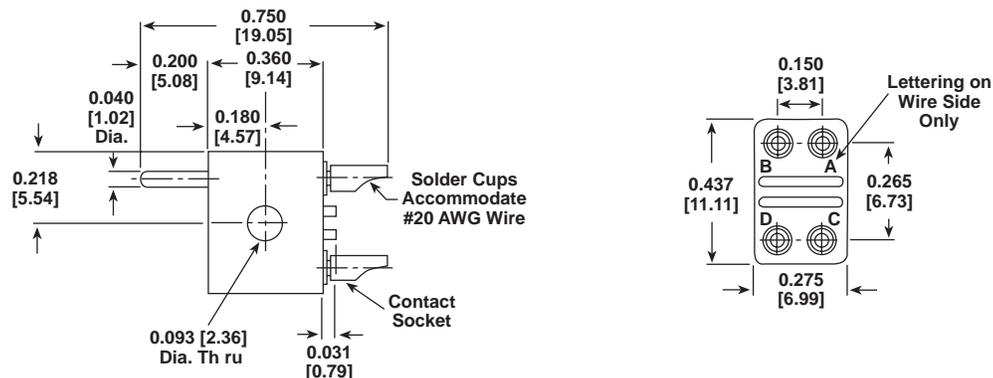





DIMENSIONAL CONFIGURATIONS [Numbers in brackets indicate millimeters]

WA20P-CD

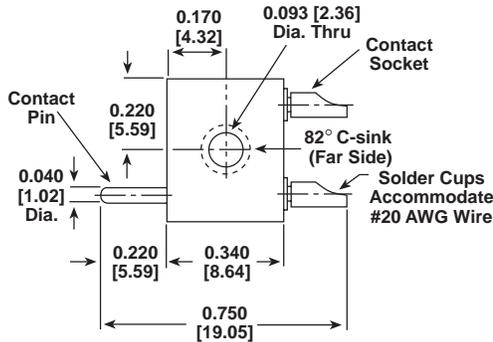

WA20S-CD

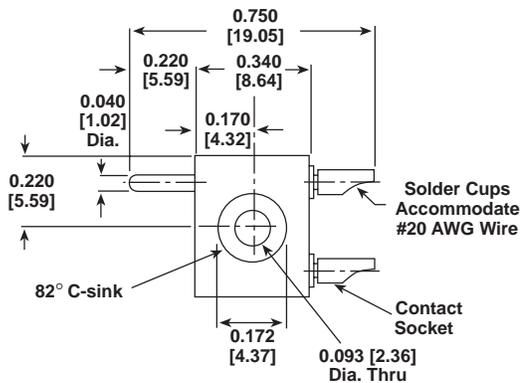

HOW TO ORDER

A20
WA20
MODEL

Side Mount with 4 positions for #20 AWG contacts.

P
BODY STYLE

P - Designates pin style body.
S - Designates socket style body.
These designations are used to identify mating connectors, however, any combination of pin and socket contacts may be ordered in either style body. Therefore, when designators 3 and 4 are the same, a connector designated A20P or WA20P will mate with a connector designated A20S or WA20S.

Example:

A20P-CD mates with A20S-CD
A20S-AB mates with A20P-CD

AB
CONTACT LOCATION

Designates pin contact positions in an A20P or WA20P connector or socket contact positions in an A20S or WA20S connector (specify "A", "B", "C", "D" or any combination of the four).

A
EMPTY CONTACT POSITIONS

Specify by contact identification letter (A, B, etc.) any contact positions which are to be left empty (omit, if none required).

EXAMPLE 1:

A20P-CD or WA20P-CD = Connector with pin contacts in positions "C" and "D" and socket contacts in positions "A" and "B".

EXAMPLE 2:

A20S-CD or WA20S-CD = Connector with socket contacts in positions "C" and "D" and pin contacts in positions "A" and "B" (would mate with Example 1 at left).

EXAMPLE 3:

A20P-BC or WA20P-BC-A = Connector with pin contacts in positions "B" and "C", socket contact in position "D" and no contact in position "A" (would mate with A20S-BC or WA20S-BC-A).