

High efficiency, three-digit numeric displays


LB-203 BL Series

The LB-203 BL series are small, three-digit numeric displays with a character height of 6.4 mm. These displays can be combined with appropriate displays in the two-digit LB-202 BL series to form a multi-digit display with an equal pitch interval between characters.

●Features

- 1) Four colors are available : red, orange, yellow and green.
- 2) Common anode and common cathode configurations are available.
- 3) Dynamic lighting system to minimize the number of pins.
- 4) Equal pitch interval between characters even with multi-digit display.
- 5) The package surface is painted black and the segments are colored the display color.


●External dimensions (Units: mm)

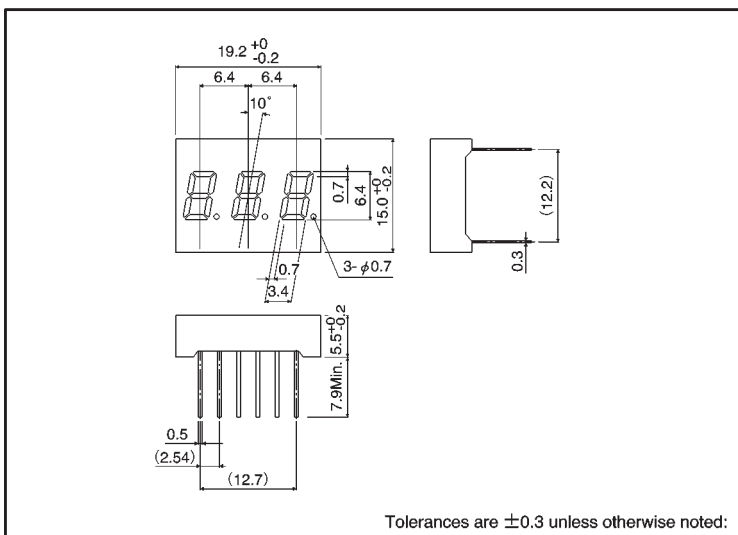

●Selection guide


Emitting color	Red	Orange	Yellow	Green
Common				
Anode	LB-203VB	LB-203DB	LB-203YB	LB-203MB
Cathode	LB-203VL	LB-203DL	LB-203YL	LB-203ML

●Pin assignments



Pin No.	Function
1	Digit 1 Common
2	Segment "e"
3	Segment "d"
4	Segment "c"
5	D.P
6	N.C
7	Digit 3 Common
8	Digit 2 Common
9	Segment "g"
10	Segment "b"
11	Segment "a"
12	Segment "f"

●Internal circuit schematic (example of common cathode)

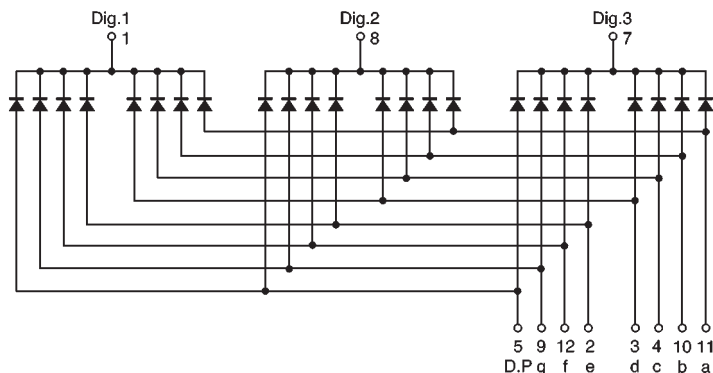

●Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Red	Orange	Yellow	Green	Unit
		LB-203VB / VL	LB-203DB / DL	LB-203YB / YL	LB-203MB / ML	
Power dissipation	P _D	960	960	960	960	mW
Power dissipation	P _D / seg	40	40	40	40	mW
Forward current	I _F	15	15	15	15	mA
Peak forward current	I _{FP}	60*	60*	60*	60*	mA
Reverse voltage	V _R	3	3	3	3	V
Operating temperature	T _{opr}	-25~+75				°C
Storage temperature	T _{stg}	-30~+85				°C

* Pulse width 1ms duty 1 / 5

●Electrical and optical characteristics (Ta = 25°C)

Parameter	Symbol	Conditions	Red			Orange			Yellow			Green			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	
Forward voltage	V _F	I _F =10mA	—	2.0	2.8	—	2.0	2.8	—	2.1	2.8	—	2.1	2.8	V
Reverse current	I _R	V _R =3V	—	—	100	—	—	100	—	—	100	—	—	100	μA
Peak wavelength	λ _P	I _F =10mA	—	650	—	—	610	—	—	585	—	—	563	—	nm
Spectral line half width	Δλ	I _F =10mA	—	40	—	—	40	—	—	40	—	—	40	—	nm

◎Not designed for radiation resistance.

● Luminous intensity

Color	λ_P	Type	Min.	Typ.	Max.	Unit
Red	650	LB-203VB	2.2	6.3	—	mcd
		LB-203VL				
Orange	610	LB-203DB	2.2	6.3	—	mcd
		LB-203DL				
Yellow	585	LB-203YB	2.2	6.3	—	mcd
		LB-203YL				
Green	563	LB-203MB	2.2	6.3	—	mcd
		LB-203ML				

Note: Measured at IF = 10mA