

## LM6317

### 120 MHz, Fast Settling, Low Power, Voltage Feedback Amplifier

#### General Description

The LM6317 is a high speed, unity-gain stable voltage feedback amplifier that consumes only 40 mW of quiescent power. Operating at  $\pm 5V$  power supply, the LM6317 provides excellent AC performance such as 120 MHz of unity-gain bandwidth, 1500V/ $\mu s$  of slew rate, and 80 dB of SFDR.

The LM6317 has the slew characteristic of a current feedback amplifier; yet it can be used in all traditional amplifier configurations. The high output current and good stability with capacitive load of LM6317 makes it ideal for driving cables. With its unity-gain stability, fast settling time and low output impedance, the LM6317 can be used to buffer A/D converters. The LM6317 also has very low input voltage and current noise, high CMRR and PSRR, desirable in precision applications such as ATE systems.


#### Features (Typical unless otherwise noted)

- Easy to use voltage feedback topology
- Unity-gain stability
- Wide unity-gain bandwidth 120 MHz
- Fast slew rate 1100V/ $\mu s$
- Fast settling time
  - 0.1% 12 ns
  - 0.01% 18 ns
- Low SFDR @ 1 MHz Driving 100 $\Omega$  80 dB
- High output current 60 mA
- High CMRR and PSRR 80 dB, 74 dB
- Low supply current 4 mA
- Specified for  $\pm 5V$  operation

#### Applications


- Active filters
- A/D Converter buffers
- Video cable drivers
- Communication systems
- Portable systems
- Ultrasound equipment
- ATE systems

#### Typical Performance



TL/H/12542-14

#### Connection Diagram



TL/H/12542-2

#### Ordering Information

Package	Temperature Range	Transport Media	NSC Drawing
	Industrial -40°C to +85°C		
8-Pin DIP	LM6317IN	Rails	N08E
8-Pin Small Outline	LM6317IM	Rails	M08A
	LM6317IMX	2.5k Tape and Reel	

TinyPak™ is a trademark of National Semiconductor Corp.

**Absolute Maximum Ratings** (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

## ESD Tolerance (Note 2)

Human Body Model	1.5 kV
Machine Model	200V

Supply Voltage ( $V^+ - V^-$ ) 12V

Differential Input Voltage 10V

Output Current (Note 3)  $\pm 60$  mA

Storage Temperature Range  $-65^\circ\text{C}$  to  $+150^\circ\text{C}$

Maximum Junction Temperature (Note 4)  $150^\circ\text{C}$

**Operating Ratings** (Note 1)

Supply Voltage  $\pm 2.3\text{V} \leq V_S \leq \pm 6\text{V}$

Junction Temperature Range  $-40^\circ\text{C} \leq T_J \leq +85^\circ\text{C}$

Thermal Resistance ( $\theta_{JA}$ )

N Package, 8-Pin Molded DIP	$110^\circ\text{C/W}$
M Package, 8-Pin Surface Mount	$170^\circ\text{C/W}$

**$\pm 5\text{V}$  DC Electrical Characteristics** Unless otherwise specified, all limits guaranteed for  $T_J = 25^\circ\text{C}$ ,  $V^+ = +5\text{V}$ ,  $V^- = -5\text{V}$ ,  $V_{CM} = 0\text{V}$ , and  $R_L = 100\Omega$ . **Boldface** limits apply at the temperature extremes.

Symbol	Parameter	Conditions	Typ (Note 5)	Limit (Note 6)	Units
$V_{OS}$	Input Offset Voltage		0.3	5 <b>7</b>	mV max
$TC\ V_{OS}$	Input Offset Voltage Average Drift		8		$\mu\text{V}/^\circ\text{C}$
$I_B$	Input Bias Current		3	12 <b>22</b>	$\mu\text{A}$ max
$I_{OS}$	Input Offset Current		0.2	2 <b>4</b>	$\mu\text{A}$ max
$R_{IN}$	Input Resistance	Differential	2		$\text{M}\Omega$
		Common	1		
$C_{IN}$	Input Capacitance	Differential	1		pF
		Common	1		
$R_O$	Open Loop Output Resistance		0.02		$\Omega$
CMRR	Common Mode Rejection Ratio	$V_{CM} = \pm 1.5\text{V}$	80	62 <b>57</b>	dB min
PSRR	Power Supply Rejection Ratio	$V_S = \pm 5\text{V}$ to $\pm 4.5\text{V}$	74	60 <b>52</b>	dB min
$A_V$	Large Signal Voltage Gain	$V_{OUT} = \pm 1\text{V}$ $R_L = 1\text{ k}\Omega$	70	55 <b>50</b>	dB min
		$V_{OUT} = \pm 1\text{V}$ $R_L = 100\Omega$	67	53 <b>48</b>	
$V_{CM}$	Input Common-Mode Voltage Range	CMRR = 60 dB	3.2	2.6 <b>2.3</b>	V min
			-3.2	-2.6 <b>-2.3</b>	V max

**± 5V DC Electrical Characteristics** (Continued) Unless otherwise specified, all limits guaranteed for  $T_J = 25^\circ\text{C}$ ,  $V^+ = +5\text{V}$ ,  $V^- = -5\text{V}$ ,  $V_{CM} = 0\text{V}$ , and  $R_L = 100\Omega$ . **Boldface** limits apply at the temperature extremes.

Symbol	Parameter	Conditions	Typ (Note 5)	Limit (Note 6)	Units
$V_O$	Output Swing	$R_L = 1\text{ k}\Omega$	3.5	3 <b>2.6</b>	V min
			-3.5	-3 <b>-2.6</b>	V max
		$R_L = 100\Omega$	3	2.5 <b>2.3</b>	V min
			-3	-2.5 <b>-2.3</b>	V max
$I_S$	Supply Current		4	6 <b>7</b>	mA max

**± 5V AC Electrical Characteristics**

Unless otherwise specified,  $T_J = 25^\circ\text{C}$ ,  $V^+ = +5\text{V}$ ,  $V^- = 5\text{V}$ ,  $A_V = 1$ , and  $R_L = 100\Omega$ .

Symbol	Parameter	Conditions	Typ (Note 5)	Units
SR	Slew Rate	5V Step	1100	V/ $\mu\text{s}$
		5V Step, $A_V = -1$ , $R_L = 500\Omega$	750	
	Unity-Gain Bandwidth	$A_V = -1$ , $R_L = 500\Omega$	120	MHz
	-3 dB Frequency	$A_V = +2$	80	MHz
$\theta_m$	Phase Margin	$A_V = -1$ , $R_L = 500\Omega$	60	°
$t_s$	Settling Time	0.1%, 2V Step	12	ns
		0.01%, 2V Step	18	
$e_n$	Input-Referred Voltage Noise	$f = 100\text{ kHz}$	4.2	$\frac{\text{nV}}{\sqrt{\text{Hz}}}$
$i_n$	Input-Referred Current Noise	$f = 100\text{ kHz}$	2	$\frac{\text{pA}}{\sqrt{\text{Hz}}}$

**Note 1:** Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not guaranteed. For guaranteed specifications and the test conditions, see the Electrical Characteristics.

**Note 2:** Human body model, 1.5 k $\Omega$  in series with 100 pF. Machine model, 200 $\Omega$  in series with 100 pF.

**Note 3:** Applies to both single-supply and split-supply operation. Sourcing and sinking more than 60 mA at the output may adversely affect reliability.

**Note 4:** The maximum power dissipation is a function of  $T_{J(\text{max})}$ ,  $\theta_{JA}$ , and  $T_A$ . The maximum allowable power dissipation at any ambient temperature is  $P_D = (T_{J(\text{max})} - T_A) / \theta_{JA}$ . All numbers apply for packages soldered directly into a PC board.


**Note 5:** Typical values represent the most likely parametric norm.

**Note 6:** All limits are guaranteed by testing or statistical analysis.

## Typical Performance Characteristics


Unless otherwise noted,  $T_A = 25^\circ\text{C}$ ,  $V_S = \pm 5\text{V}$

**Supply Current vs Supply Voltage**




TL/H/12542-3

**$I_B$  and  $I_{OS}$  vs Common-Mode Voltage**




TL/H/12542-4

**PSRR, CMRR, and Closed Loop  $R_o$**




TL/H/12542-5

**Open Loop Frequency Response**




**Bandwidth vs Supply Voltage**




TL/H/12542-7

**Bandwidth vs Capacitive Load**




TL/H/12542-8

**Non-Inverting Frequency Response**




TL/H/12542-9

**Inverting Frequency Response**




TL/H/12542-10

**Equivalent Input Noise**




TL/H/12542-11

**2nd and 3rd Harmonic Distortion**




TL/H/12542-12

**Settling Time vs Capacitive Load**



TL/H/12542-13


**Maximum Power Dissipation vs Ambient Temperature**



TL/H/12542-24

## Typical Performance Characteristics Unless otherwise noted, $T_A = 25^\circ\text{C}$ , $V_S = \pm 5\text{V}$ (Continued)


**Large Signal Pulse Response**  
( $A_V = +1$ )

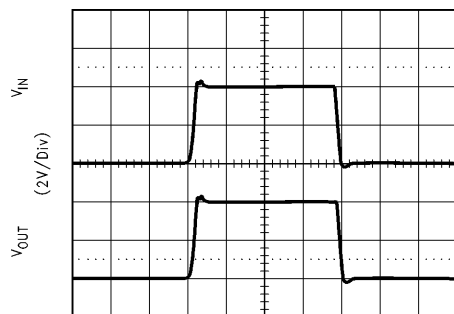

Time (50 ns/Div)

TL/H/12542-1


**Small Signal Pulse Response**  
( $A_V = +1$ )

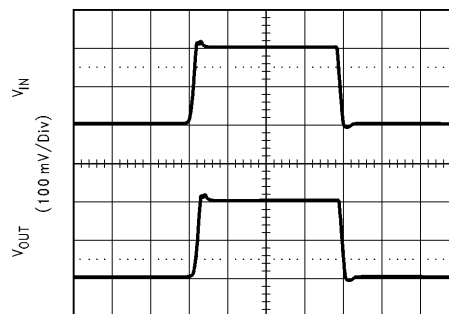

Time (50 ns/Div)

TL/H/12542-15


**Large Signal Pulse Response**  
( $A_V = -1$ )

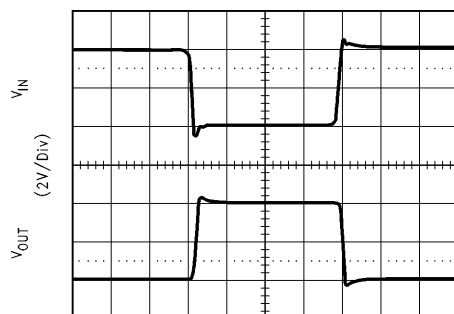

Time (50 ns/Div)

TL/H/12542-16


**Small Signal Pulse Response**  
( $A_V = -1$ )

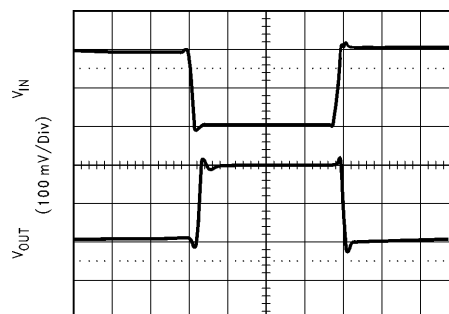

Time (50 ns/Div)

TL/H/12542-17


**Large Signal Pulse Response**  
( $A_V = +2$ )

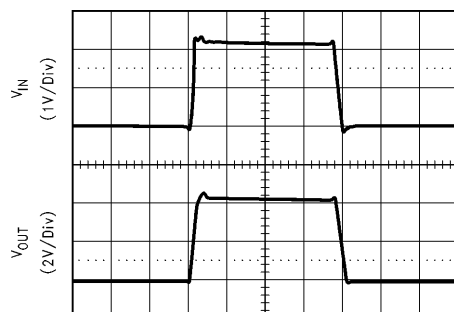

Time (50 ns/Div)

TL/H/12542-18

**Small Signal Pulse Response**  
( $A_V = +2$ )

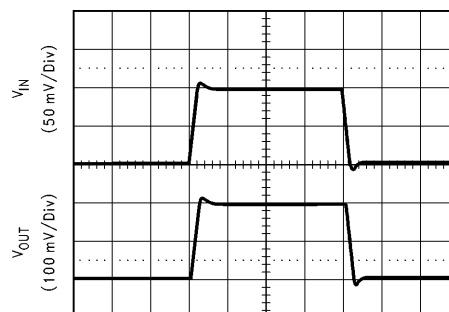

Time (50 ns/Div)

TL/H/12542-19

## Application Notes


### Using the LM6317

#### LIMITS AND PRECAUTIONS

The absolute maximum supply voltage which may be applied to the LM6317 is 12V. Designers should not design for more than 10V nominal, and carefully check supply tolerances under all conditions so that the voltages do not exceed the maximum.

#### DIFFERENTIAL INPUT VOLTAGE

Differential input voltage is the difference in voltage between the non-inverting (+) input and the inverting (–) input of the op amp. The absolute maximum differential input for the LM6317 is 10V across the inputs. This limit also applies when there is no power supplied to the op amp. This may not be a problem in most conventional op amp designs, however, designers should avoid using the LM6317 as comparators or forcing the inputs to different voltages. In some designs, diodes protection may be needed between the inputs, as shown in *Figure 1*.

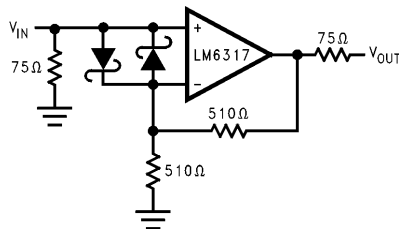

TL/H/12542–20

FIGURE 1. Input Protection for LM6317

### Layout Consideration

#### PRINTED CIRCUIT BOARDS AND HIGH SPEED OP AMPS

There are many things to consider when designing PC boards for high speed op amps. Without proper caution, it is very easy and frustrating to have excessive ringing, oscillation and other degraded AC performance in high speed circuits. As a rule, the signal traces should be short and wide to provide low inductance and low impedance paths. Any unused board space needs be grounded to reduce stray signal pickup. Critical components should also be grounded at a common point to eliminate voltage drop. Sockets add capacitance to the board and can affect frequency performance. It is better to solder the amplifier directly into the PC board without using any socket.

#### USING PROBES

Active (FET) probes are ideal for taking high frequency measurements because they have wide bandwidth, high input impedance and low input capacitance. However, the probe ground leads provide a long ground loop that will produce errors in measurement. Instead, the probes can be grounded directly by removing the ground leads and probe jackets and using scope probe jacks.

#### COMPONENTS SELECTION AND FEEDBACK RESISTOR

It is important in high speed applications to keep all component leads short because wires are inductive at high frequency. For discrete components, choose carbon composition-type resistors and mica-type capacitors. Surface mount components are preferred over discrete components for minimum inductive effect.


Large values of feedback resistors can couple with parasitic capacitance and cause undesirable effects such as ringing or oscillation in high speed amplifiers. Feedback resistor value around 1 kΩ is recommended.

#### COMPENSATION FOR INPUT CAPACITANCE

The combination of an amplifier's input capacitance with the gain setting resistors adds a pole that can cause peaking or oscillation. To solve this problem, a feedback capacitor with a value

$$C_F > (R_G \times C_{IN})/R_F$$

can be used to cancel that pole. The value of  $C_{IN}$  can be found in the DC Electrical Characteristics Table of the data-sheet. *Figure 2* illustrates the compensation circuit.

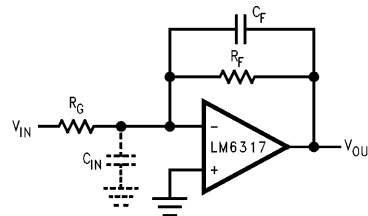


TL/H/12542–21

FIGURE 2. Compensating for Input Capacitance

### Power Supply Bypassing

Bypassing the power supply is necessary to maintain low power supply impedance across frequency. Both positive and negative power supplies should be bypassed individually by placing 0.01 μF ceramic capacitors directly to power supply pins and 2.2 μF tantalum capacitors close to the power supply pins.

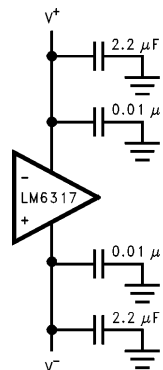

TL/H/12542–22

FIGURE 3. Power Supply Bypassing


## Application Notes (Continued)

### Termination

In high frequency applications, reflections occur if signals are not properly terminated. To minimize reflection, coaxial cable with matching characteristic impedance to the signal source should be used. The other end of the cable should be terminated with the same value terminator or resistor. For the commonly used cables, RG59 has  $75\Omega$  characteristics impedance, and RG58 has  $50\Omega$  characteristics impedance.

### Driving Capacitive Loads

Amplifiers driving capacitive loads can oscillate or have ringing at the output. To eliminate oscillation or reduce ringing, an isolation resistor can be placed as shown below in *Figure 4*. The combination of the isolation resistor and the load capacitor forms a pole to increase stability by adding more phase margin to the overall system. The desired performance depends on the value of the isolation resistor; the bigger the isolation resistor, the more damped the pulse response becomes. A  $50\Omega$  isolation resistor is recommended for initial evaluation.



TL/H/12542-23

FIGURE 4. Driving Capacitive Load

## Other High Speed and Video Amplifiers

National Semiconductor has an extensive line of high speed amplifiers, with a range of operating voltage from 3V single supply to  $\pm 15V$ , and a range of package types, such as the space saving SOT23-5 TinyPak™ ( $3.05mm \times 3.00mm \times 1.43mm$  - about the size of a grain of rice) and a wide SO-8 for better power dissipation.

This op amp line includes -




**LM6171** 100 MHz low distortion amplifier with greater than  $3000V/\mu s$  slew rate. Voltage feedback design draws only 2.5 mA. Specified at  $\pm 15V$  and  $\pm 5V$  supplies.

**LM7131** TinyPak (SOT23-5) video amplifier with 70 MHz gain bandwidth. Specified at 3V, 5V and  $\pm 5V$  supplies.

**LM7171** 200 MHz voltage feedback amplifier with 100 mA output current and  $4000V/\mu s$  slew rate. Supply current of 6.5 mA. Specified at  $\pm 15V$  and  $\pm 5V$  supplies.


Information on these parts is available from your National Semiconductor representative.

## Physical Dimensions inches (millimeters) unless otherwise noted

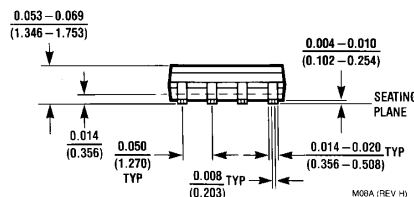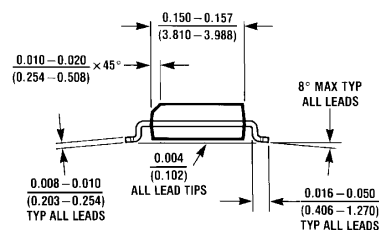

M08A (REV H)

8-Pin Small Outline  
Order Number LM6317IM or LM6317IMX  
NSC Package Number M08A

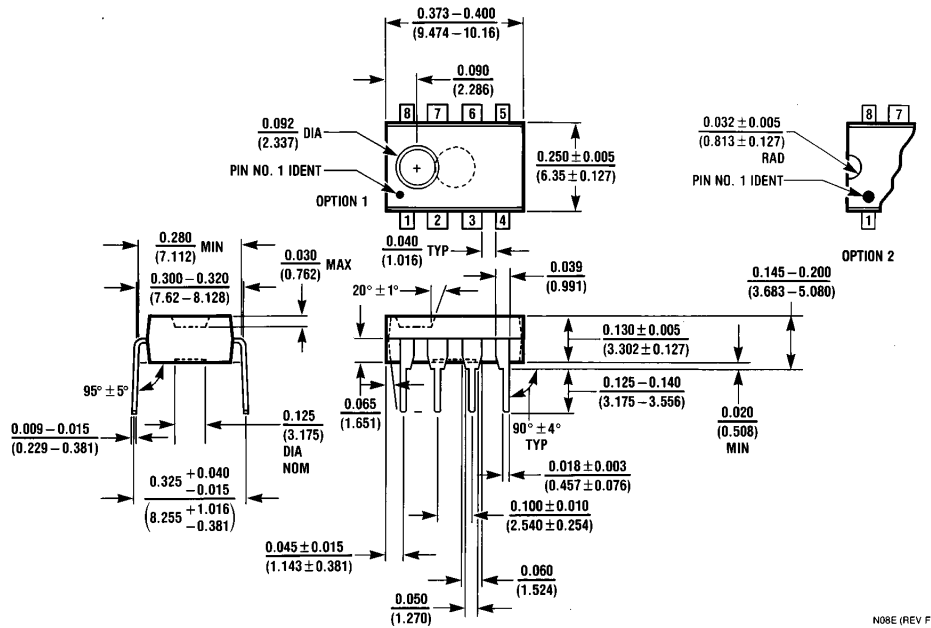**Physical Dimensions** inches (millimeters) unless otherwise noted (Continued)

**8-Pin DIP**  
**Order Number LM6317IN**  
**NSC Package Number N08E**

**LIFE SUPPORT POLICY**

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor Corporation**  
 1111 West Bardin Road  
 Arlington, TX 76017  
 Tel: 1(800) 272-9959  
 Fax: 1(800) 737-7018

<http://www.national.com>

**National Semiconductor Europe**

Fax: +49 (0) 180-530 85 86  
 Email: [europe.support@nsc.com](mailto:europe.support@nsc.com)  
 Deutsch Tel: +49 (0) 180-530 85 85  
 English Tel: +49 (0) 180-532 78 32  
 Français Tel: +49 (0) 180-532 93 58  
 Italiano Tel: +49 (0) 180-534 16 80

**National Semiconductor Hong Kong Ltd.**

13th Floor, Straight Block,  
 Ocean Centre, 5 Canton Rd.  
 Tsimshatsui, Kowloon  
 Hong Kong  
 Tel: (852) 2737-1600  
 Fax: (852) 2736-9960

**National Semiconductor Japan Ltd.**

Tel: 81-043-299-2308  
 Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.