


## MT1318-URP22

### Features

High Intensity  
 Low Current Requirements  
 IC Compatible  
 5mm Package

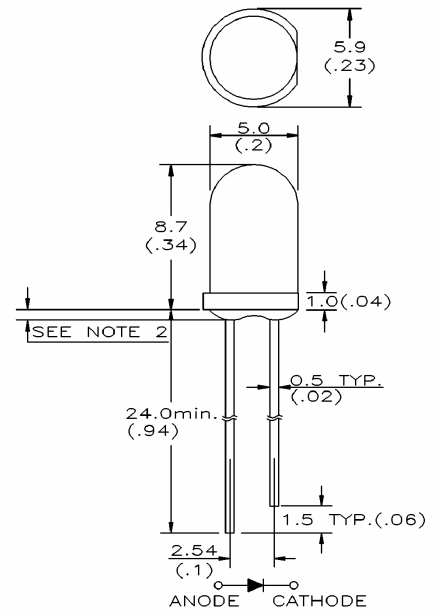

### Maximum Ratings (Ta=25°C)

Characteristic	Symbol	Max.	Unit
Forward Current	I <sub>F</sub>	50	mA
Reverse Voltage	V <sub>R</sub>	4	V
Power Dissipation	P <sub>D</sub>	140.00	mW
Operating Temperature	T <sub>opr</sub>	-25 ~ +85	°C
Storage Temperature	T <sub>stg</sub>	-40 ~ +100	°C
Soldering Temperature	T <sub>sol</sub>	260	°C
Soldering Time	-	for 5 sec. max	-

### Notes :

- All dimensions are in millimeters (inches).
- Protruded resin under flange is 1.0mm (.04" )max.
- Tolerance is ±0.25mm (0.01" )unless otherwise noted.


### Opto-Electrical Characteristics (Ta=25°C)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =20mA	-	2.20	2.80	V
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =4V	-	-	100	μ A
Luminous Intensity	I <sub>v</sub>	I <sub>F</sub> =20mA	2500.00	4500.00	-	mcd
Viewing Angle	2θ <sup>1/2</sup>	-	-	30°	-	deg.
Peak Wavelength	λ <sub>p</sub>	I <sub>F</sub> =20mA	-	642	-	nm
Dominant Wavelength	λ <sub>d</sub>	I <sub>F</sub> =20mA	-	630	-	nm
Spectral Line Half Width	Δλ	I <sub>F</sub> =20mA	-	20	-	nm


Specifications are subject to change without notice.

## MT1318-URP22 Graphs


### Typical Electrical / Optical Characteristics Curves :

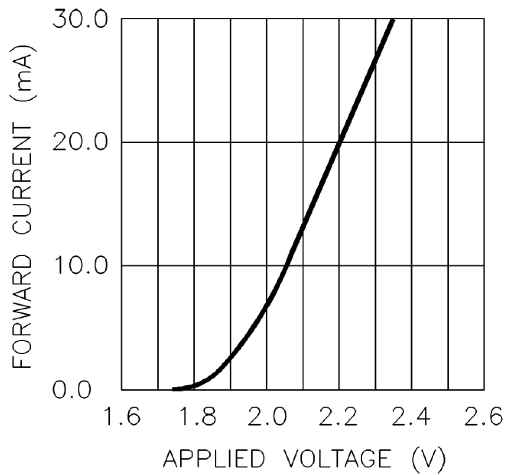


**Forward Current vs. Forward Voltage**

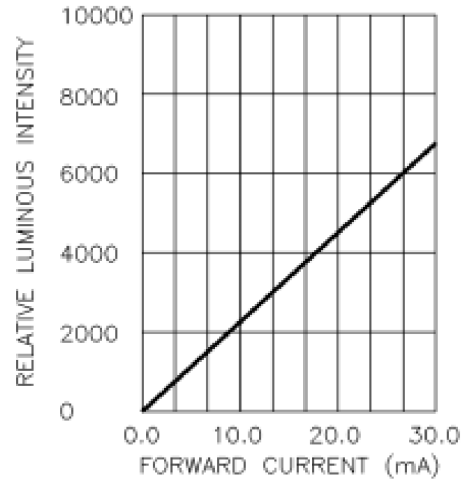

**Forward Current vs. Relative Luminous Intensity**

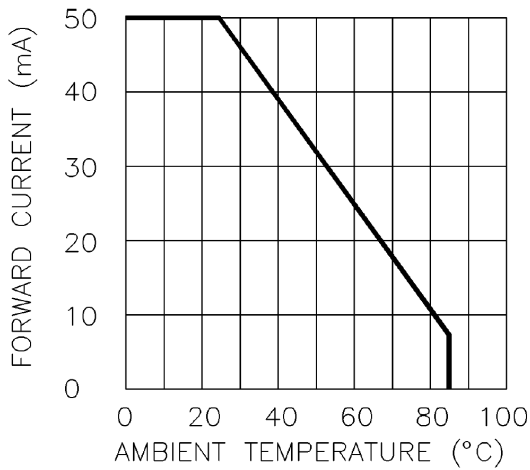

**Ambient Temperature vs. Forward Current**

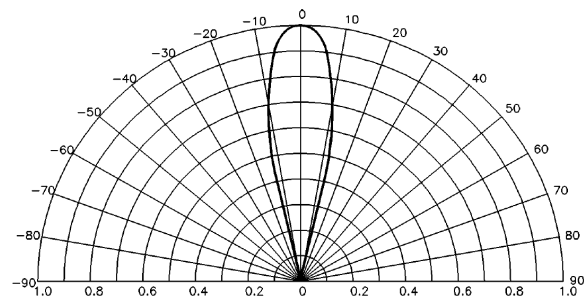

**Radiation Diagram**