

1.1x3.4mm RECTANGULAR SOLID LAMP

WP1002GD

GREEN


Features

- •LOW POWER CONSUMPTION.
- •RELIABLE AND RUGGED.
- •EXCELLENT UNIFORMITY OF LIGHT OUTPUT.
- •SUITABLE FOR LEVEL INDICATOR.
- •LONG LIFE-SOLID STATE RELIABILITY.
- ●RoHS COMPLIANT.

Description

The Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

Package Dimensions

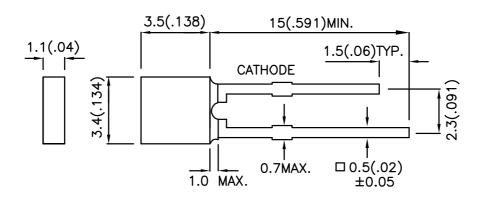

- Notes:
 1. All dimensions are in millimeters (inches).
- 2. Tolerance is ±0.25(0.01") unless otherwise noted.

 3. Lead spacing is measured where the leads emerge from the package.
- 4. Specifications are subject to change without notice.

SPEC NO: DSAF2555 REV NO: V.1 DATE: APR/16/2005 **PAGE: 1 OF 3** APPROVED: J. Lu **CHECKED: Allen Liu** DRAWN: Y.W.WANG ERP:1101000273

Kingbright

Selection Guide

Part No.	Dice	Lens Type	lv (mcd) @ 10mA		Viewing Angle
			Min.	Тур.	201/2
WP1002GD	GREEN (GaP)	GREEN DIFFUSED	0.4	2.5	110°

Note:

Electrical / Optical Characteristics at T_A=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Green	565		nm	IF=20mA
λD	Dominant Wavelength	Green	568		nm	IF=20mA
Δλ1/2	Spectral Line Half-width	Green	30		nm	IF=20mA
С	Capacitance	Green	15		pF	VF=0V;f=1MHz
VF	Forward Voltage	Green	2.2	2.5	V	IF=20mA
IR	Reverse Current	Green		10	uA	VR = 5V

Absolute Maximum Ratings at Ta=25°C

Parameter	Green	Units		
Power dissipation	105	mW		
DC Forward Current	25	mA		
Peak Forward Current [1]	140	mA		
Reverse Voltage	5	V		
Operating / Storage Temperature	-40°C To +85°C			
Lead Solder Temperature [2]	260°C For 3 Seconds			
Lead Solder Temperature [3]	e [3] 260°C For 5 Seconds			

Notes


- 1. 1/10 Duty Cycle, 0.1ms Pulse Width.
- 2. 2mm below package base.
- 3. 5mm below package base.

 SPEC NO: DSAF2555
 REV NO: V.1
 DATE: APR/16/2005
 PAGE: 2 OF 3

 APPROVED: J. Lu
 CHECKED: Allen Liu
 DRAWN: Y.W.WANG
 ERP:1101000273

 $^{1.\,\}theta1/2$ is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.


Kingbright

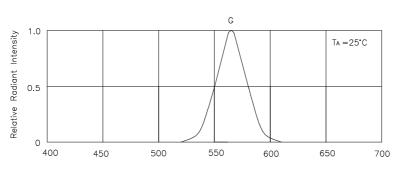



wavelength λ (nm) RELATIVE INTENSITY Vs. WAVELENGTH


Green


WP1002GD











SPATIAL DISTRIBUTION

Remarks:

If special sorting is required (e.g. binning based on forward voltage, luminous intensity, or wavelength), the typical accuracy of the sorting process is as follows:

- 1. Wavelength: +/-1nm
- 2. Luminous Intensity: +/-15%
- 3. Forward Voltage: +/-0.1V

Note: Accuracy may depend on the sorting parameters.

 SPEC NO: DSAF2555
 REV NO: V.1
 DATE: APR/16/2005
 PAGE: 3 OF 3

 APPROVED: J. Lu
 CHECKED: Allen Liu
 DRAWN: Y.W.WANG
 ERP:1101000273