

---

 PACKAGED FLIP CHIP ARRAY
 

---

**APPLICATIONS**

- ✓ Cellular Phones
- ✓ MCM Boards
- ✓ Wireless Communication Circuits
- ✓ IR LEDs
- ✓ SMART & PCMCIA Cards

**IEC COMPATIBILITY (EN61000-4)**

- ✓ 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- ✓ 61000-4-4 (EFT): 40A - 5/50ns


**FEATURES**

- ✓ **CHIP SCALE PACKAGE 0.050" (1.270mm) x 0.030" (0.762mm)**
- ✓ ESD Protection > 25 kilovolts
- ✓ Available in Multiple Voltage Types Ranging From 3.3V to 36V
- ✓ 250 Watts Peak Pulse Power per Line (tp = 8/20µs)
- ✓ Bidirectional Configuration & Monolithic Structure
- ✓ Protects 1 Line
- ✓ RoHS Compliant in Lead-Free Versions

**MECHANICAL CHARACTERISTICS**

- ✓ Encapsulated 0502 Chip
- ✓ Weight 0.73 milligrams (Approximate)
- ✓ Available in Tin-Lead or Lead-Free Pure-Tin Plating(Annealed)
- ✓ Solder Reflow Temperature:
  - Tin-Lead - Sn/Pb, 85/15: 240-245°C
  - Pure-Tin - Sn, 100: 260-270°C
- ✓ Flammability Rating UL 94V-0
- ✓ 8mm Plastic & Paper Tape and Reel Per EIA Standard 481
- ✓ Device Marking On Reel

---

**PIN CONFIGURATION**


**DEVICE CHARACTERISTICS**


MAXIMUM RATINGS @ 25°C Unless Otherwise Specified			
PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Power ( $t_p = 8/20\mu s$ ) - See Figure 1	$P_{PP}$	250	Watts
Operating Temperature	$T_J$	-55°C to 150°C	°C
Storage Temperature	$T_{STG}$	-55°C to 150°C	°C

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified							
PART NUMBER (See Note 1)	DEVICE MARKING CODE	RATED STAND-OFF VOLTAGE  $V_{WM}$ VOLTS	MINIMUM BREAKDOWN VOLTAGE	MAXIMUM CLAMPING VOLTAGE (See Fig. 2)	MAXIMUM CLAMPING VOLTAGE (See Fig. 2)	MAXIMUM LEAKAGE CURRENT (See Note 2)	TYPICAL CAPACITANCE
			@ 1mA $V_{(BR)}$ VOLTS	@ $I_p = 1A$ $V_C$ VOLTS	@ 8/20 $\mu s$ $V_C @ I_{PP}$	@ $V_{WM}$ $I_D$ $\mu A$	@ 0V, 1 MHz C pF
PKFC3.3C	03	3.3	4.0	7.0	12.5V @ 20A	75*	150
PKFC05C	05	5.0	6.0	9.8	14.7V @ 17A	10**	100
PKFC08C	08	8.0	8.5	13.4	19.2V @ 13A	10***	75
PKFC12C	12	12.0	13.3	19.0	29.7V @ 9.0A	1	50
PKFC15C	15	15.0	16.7	24.0	35.7V @ 7.0A	1	40
PKFC24C	24	24.0	26.7	43.0	55.0V @ 5.0A	1	30
PKFC36C	36	36.0	40.0	64.0	84.0V @ 3.0A	1	25


**Note 1:** All devices are bidirectional. Electrical characteristics apply in both directions.

**Note 2:** \*Typical leakage current < 5 $\mu A$  @ 2.8V. \*\*Typical leakage current < 500nA @ 3.3V. \*\*\*Typical leakage current < 200nA @ 5V.




**FIGURE 1**  
**PEAK PULSE POWER VS PULSE TIME**

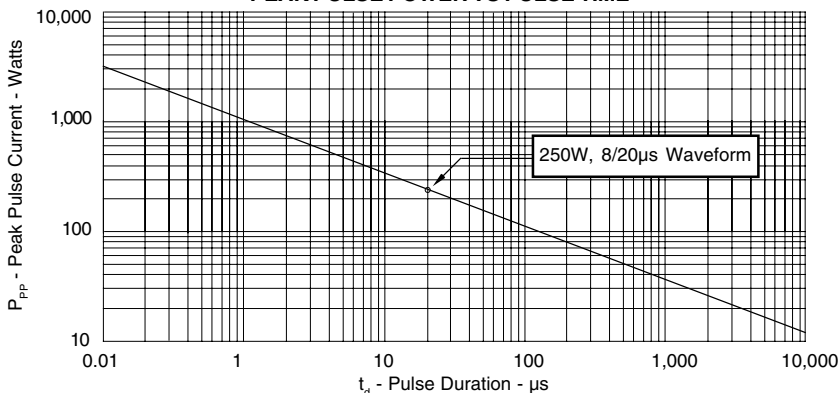

**FIGURE 2**  
**PULSE WAVEFORM**

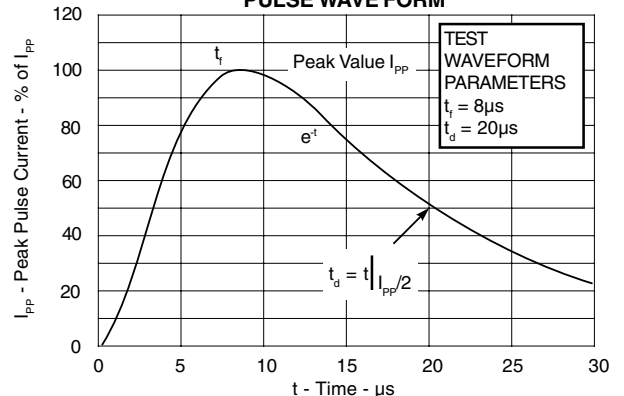

GRAPHS

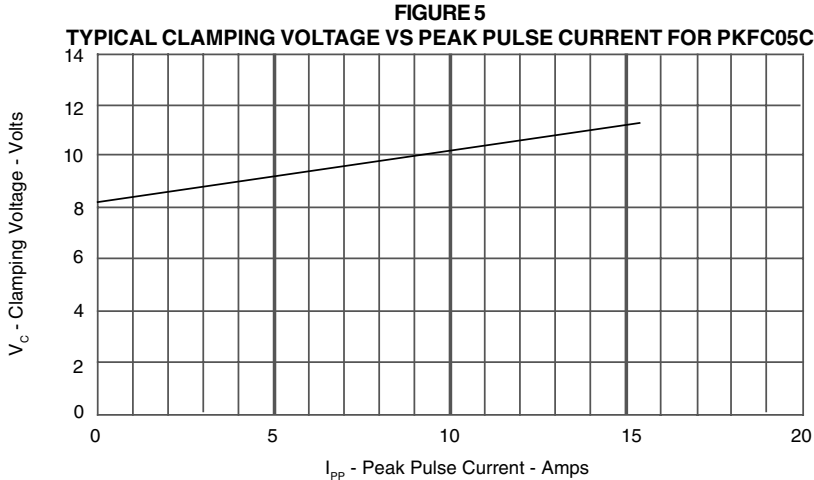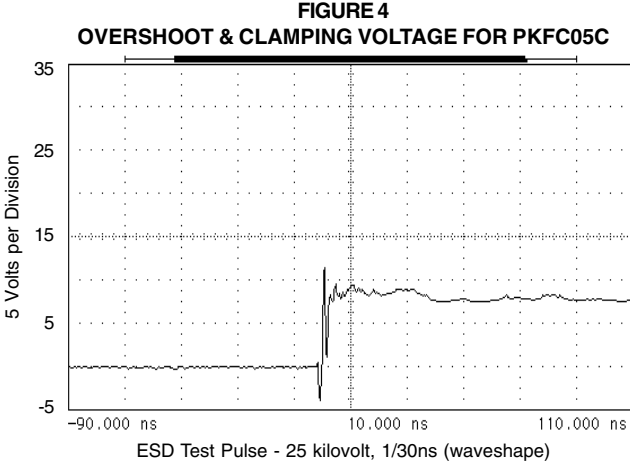
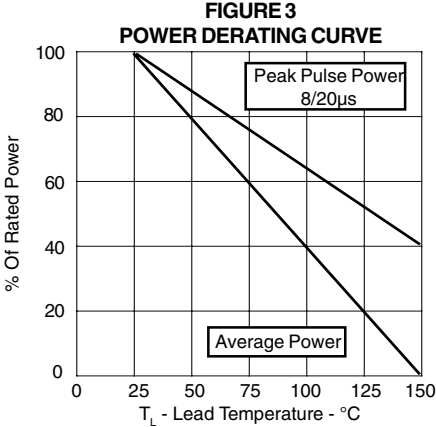


**APPLICATION INFORMATION**

PRINTED CIRCUIT BOARD RECOMMENDATIONS	
PARAMETER	VALUE
Pad Size on PCB	0.275mm
Pad Shape	Round
Pad Definition	Non-Solder Mask Defined Pads
Solder Mask Opening	0.325mm Round
Solder Stencil Thickness	0.150mm
Solder Stencil Aperture Opening (laser cut, 5% tapered walls)	0.330mm Round
Solder Paste Type	No Clean
Pad Protective Finish	OSP(Entek Cu Plus 106A)
Tolerance - Edge To Corner Ball	±50µm
Solder Ball Side Coplanarity	±20µm
Maximum Dwell Time Above Liquidous (183°C)	60 Seconds
Soldering Maximum Temperature	270°C

REQUIREMENTS
Temperature: $T_p$ for Lead-Free (SnAgCu): 260-270°C $T_p$ for Tin-Lead: 240-245°C Preheat time and temperature depends on solder paste and flux activation temperature, component size, weight, surface area & plating.

**RECOMMENDED NON-SOLDER MASK DEFINED PAD ILLUSTRATION**

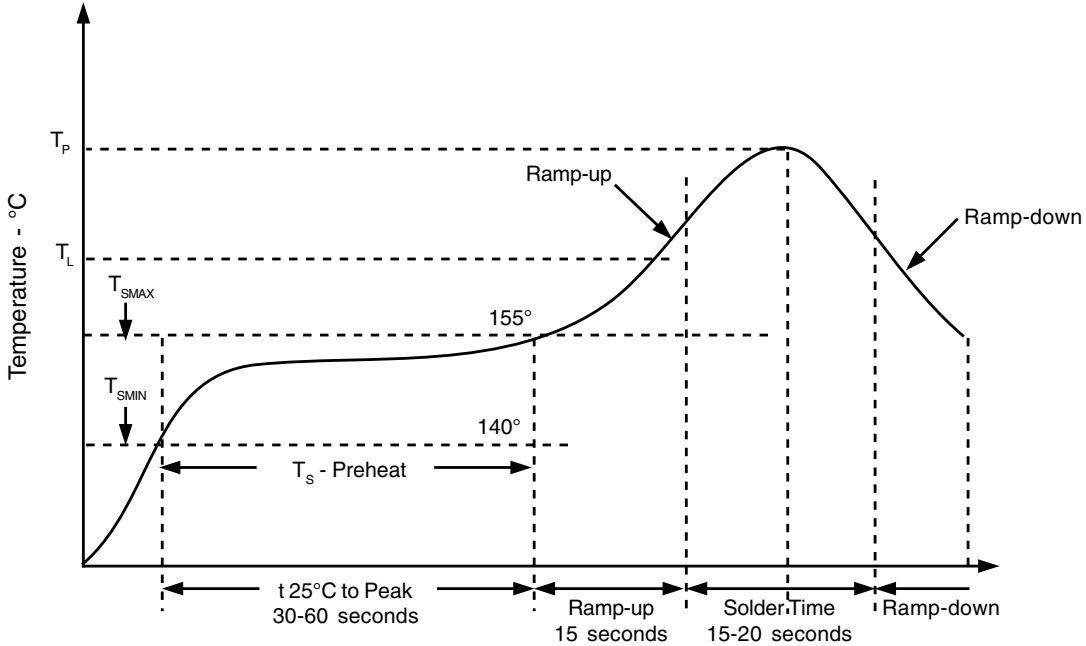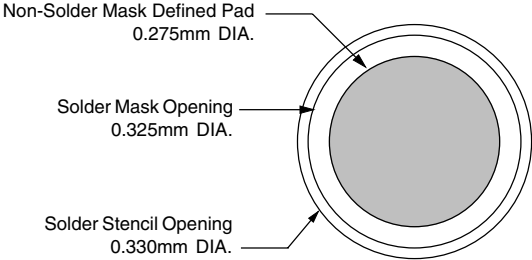

**PACKAGE OUTLINE & DIMENSIONS**

**PACKAGE OUTLINE**

**MOUNTING PAD**

**PACKAGE DIMENSIONS**

DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.73	0.76	0.79	0.029	0.030	0.031
B	1.22	1.27	1.32	0.048	0.050	0.052
C	0.73	0.76	0.79	0.029	0.030	0.031
D	0.54	0.57	0.60	0.021	0.023	0.024
E	0.10	0.13	0.16	0.004	0.005	0.006
F	0.55	0.58	0.61	0.022	0.023	0.024
G	0.27	0.30	0.33	0.011	0.012	0.013
H	0.38	0.41	0.44	0.015	0.016	0.017
J	0.35	0.38	0.41	0.014	0.015	0.016
K	0.35	0.38	0.41	0.014	0.015	0.016

**NOTES**

- Controlling dimensions in inches.
- Decimal tolerances for mounting pad : ± 0.003" (± 0.08mm).
- Maximum size: 0.052" (1.321mm) by 0.036" (0.914mm).
- All dimensions ± 0.003" on package outline.

---

**TAPE & REEL ORDERING NOMENCLATURE**

- Surface mount product is taped and reeled in accordance with EIA 481.
- 8mm Plastic Tape: 7 Inch Reels - 5,000 pieces per reel. Ordering Suffix: -T75-1 (i.e., PKFC05C-T75-1).
- Suffix -LF = Lead-Free, Pure-Tin Plating, i.e., PKFC05C-LF-T75-1.

**PAD DIMENSIONS**

DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.00	1.02	1.04	0.039	0.040	0.041
B	0.62	0.64	0.66	0.024	0.025	0.026
C	1.44	1.47	1.50	0.056	0.058	0.060
E	0.18	0.20	0.22	0.007	0.008	0.009
F	0.49	0.51	0.53	0.019	0.020	0.021
G	0.31	0.33	0.35	0.012	0.013	0.014
J	0.31	0.33	0.35	0.012	0.013	0.014

**TAPE & REEL ORIENTATION**


**NOTE**

- Top view of tape. Solder PADS face down in tape package.

**Outline & Dimensions: Rev 1 - 8/03, 06040**

Tape & Reel Specifications (Dimensions in millimeters)

Reel Dia.	Tape Width	A0	B0	K0	D	E	F	W	P0	P2	P	t
178mm (7")	8mm	1.08 ± 0.05	1.60 ± 0.05	0.72 ± 0.05	1.50 ± 0.10	1.75 ± 0.10	3.50 ± 0.05	8.00 ± 0.30	4.00 ± 0.10	2.00 ± 0.05	4.00 ± 0.10	0.20 ± 0.025

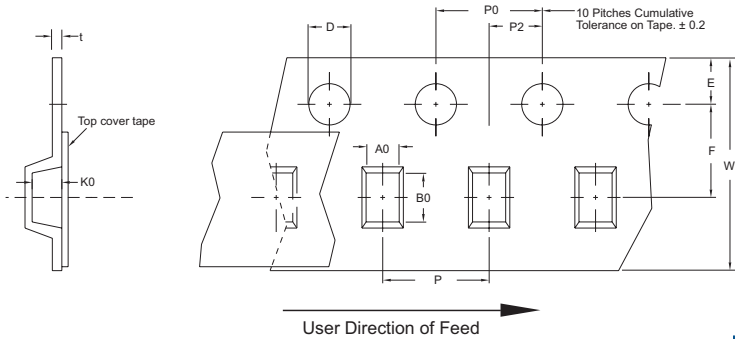

**COPYRIGHT © ProTek Devices 2005**  
 SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice (except JEDEC).  
 DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice, and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance, ProTek assumes no responsibility with respect to the selection or specifications of such products.

**ProTek Devices**  
 2929 South Fair Lane, Tempe, AZ 85282  
 Tel: 602-431-8101 Fax: 602-431-2288  
 E-Mail: [sales@protekdevices.com](mailto:sales@protekdevices.com)  
 Web Site: [www.protekdevices.com](http://www.protekdevices.com)