

**M•C•C**

Micro Commercial Components  
21201 Itasca Street Chatsworth  
CA 91311  
Phone: (818) 701-4933  
Fax: (818) 701-4939

## Features

- Low Current Leakage
- Metalurgically Bonded Construction
- Low Cost

## Maximum Ratings

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- Maximum Thermal Resistance; 35 °C/W Junction To Ambient

Electrical Characteristics @ 25°C Unless Otherwise Specified


Reverse Voltage	$V_R$	75V	
Peak Reverse Voltage	$V_{RM}$	100V	
Average Rectified Current	$I_O$	150mA	Resistive Load $f \geq 50\text{Hz}$
Power Dissipation	$P_{TOT}$	500mW	
Junction Temperature	$T_J$	150°C	
Peak Forward Surge Current	$I_{FSM}$	500mA	$t < 1\text{s}$
Instantaneous Forward Voltage	$V_F$	1.0V(MAX) 0.62-0.72V	$I_{FM} = 100\text{mA};$ $I_{FM} = 5.0\text{mA}$
Maximum DC Reverse Current At Rated DC Blocking Voltage	$I_R$	25nA 50 $\mu$ A 5uA	$V_R = 20\text{Volts}$ $T_J = 25^\circ\text{C}$ $T_J = 150^\circ\text{C}$ $V_R = 75\text{Volts}$
Typical Junction Capacitance	$C_J$	4pF	Measured at 1.0MHz, $V_R = 4.0\text{V}$
Reverse Recovery Time	$T_{rr}$	4nS	$I_F = 10\text{mA}$ $V_R = 6\text{V}$ $R_L = 100\Omega$

\*Pulse test: Pulse width 300  $\mu\text{sec}$ , Duty cycle 2%

**1N4448**

**500mW 100Volt  
Switching Diode**

**DO-35**

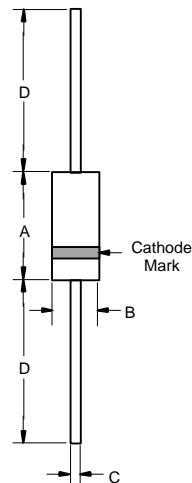


DIM	DIMENSIONS				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	---	.166	---	4.2	
B	---	.079	---	2.00	
C	---	.020	---	.52	
D	1.000	---	25.40	---	

# 1N4448


MCC

Figure 1  
Typical Forward Characteristics

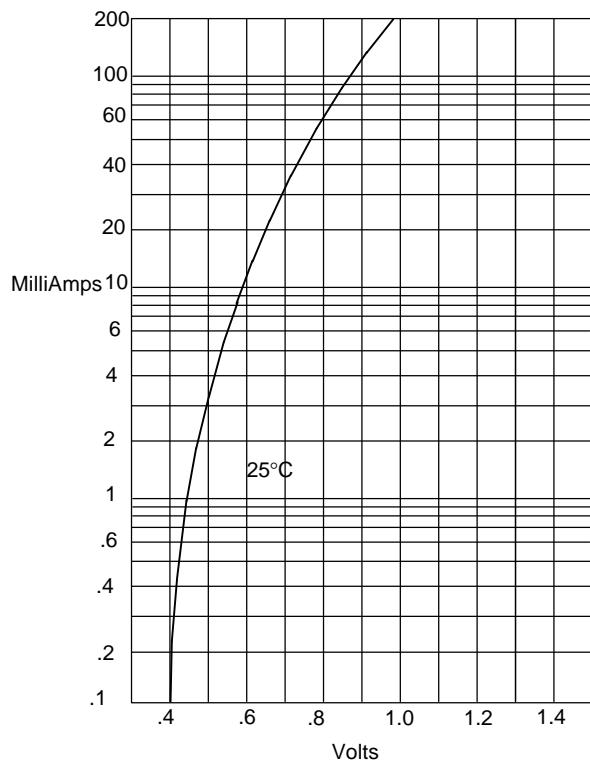


Instantaneous Forward Current - Amperesversus  
Instantaneous Forward Voltage - Volts

Figure 2  
Forward Derating Curve

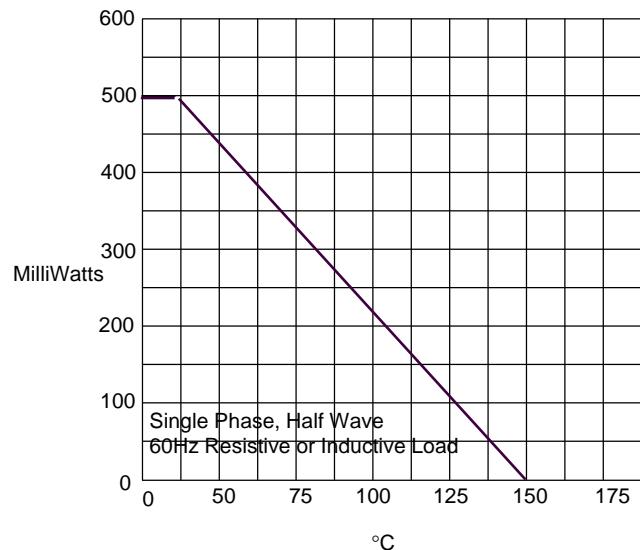

Admissible Power Dissipation - MilliWattsversus  
Ambient Temperature - °C

Figure 3  
Junction Capacitance

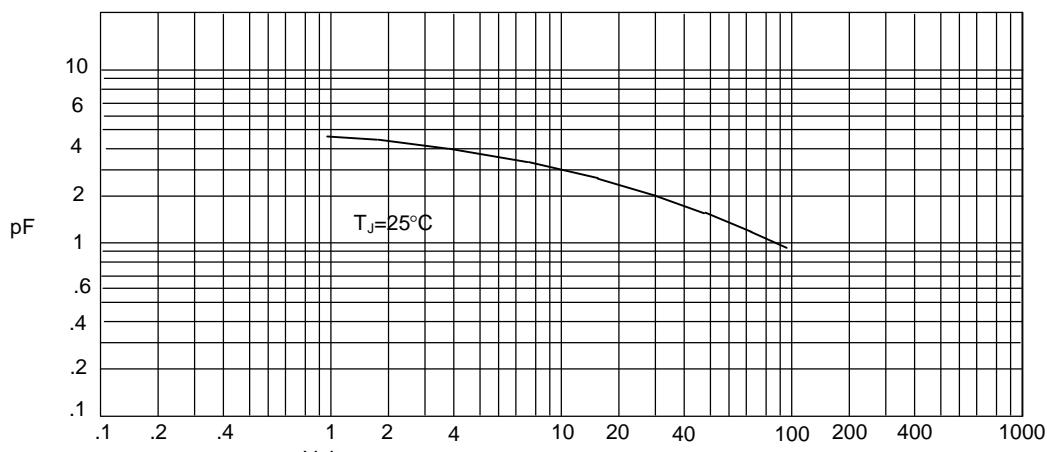


Junction Capacitance - pFversus  
Reverse Voltage - Volts

# 1N4448


MCC

Figure 4  
Typical Reverse Characteristics

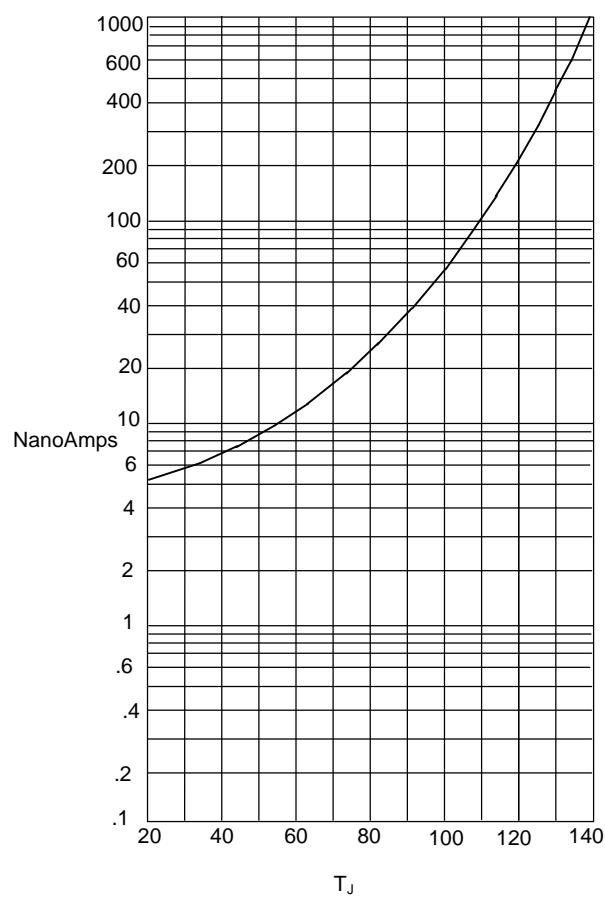

Instantaneous Reverse Leakage Current - NanoAmperesversus  
Junction Temperature - °C

Figure 5  
Peak Forward Surge Current

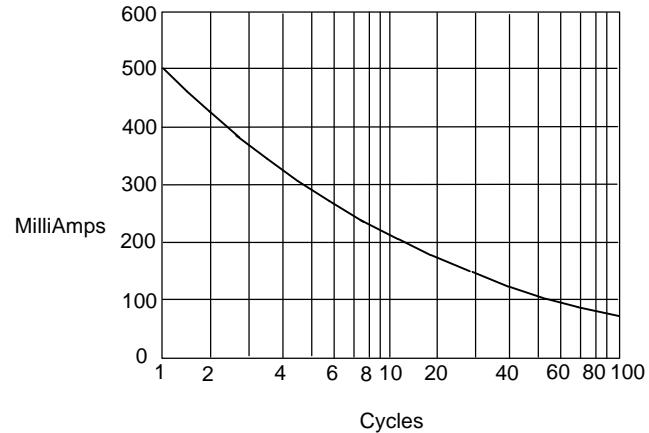

Peak Forward Surge Current - Amperesversus  
Number Of Cycles At 60Hz - Cycles

$T_A=25^\circ\text{C}$   
 $T_A=100^\circ\text{C}$