


**Features**

- For general applications
- Low turn-on voltage
- PN junction guard ring

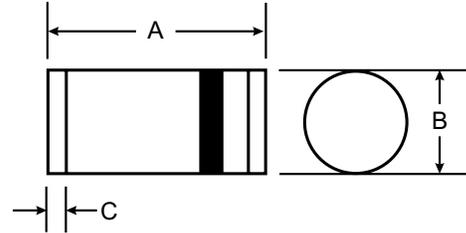

**Mechanical Data**

- Glass case
- Weight: 0.05g (approx)

	Min	Max
<b>A</b>	3.4	3.6
<b>B</b>	1.40	1.50
<b>C</b>	0.20	0.40
<b>All Dimensions in mm</b>		

**Maximum Ratings** @  $T_A = 25^\circ\text{C}$  unless otherwise specified

Characteristic	Symbol	Value	Unit
Continuous reverse voltage	$V_R$	30	V
Forward continuous current*	$I_F$	200	mA
Peak forward current*	$I_{FM}$	300	mA
Surge forward current* @ $t_p = 1\text{s}$	$I_{FSM}$	600	mA
Power dissipation* @ $T_A = 65^\circ\text{C}$	$P_{tot}$	200	mW
Junction temperature	$T_j$	125	$^\circ\text{C}$
Operating temperature range	$T_A$	-65 to +125	$^\circ\text{C}$
Storage temperature range	$T_{STG}$	-65 to +150	$^\circ\text{C}$

**Electrical Characteristics** @  $T_j = 25^\circ\text{C}$  unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit
Reverse breakdown voltage 10 $\mu\text{A}$ pulses	$V_{(BR)R}$	30	—	—	V

\* Valid provided that electrodes are kept at ambient temperature.