

VICOR CONFIDENTIAL

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

	REV.		DATE	APPROVED	
Ī	01	DRN- E990450	RCM	3/9/00	DPK

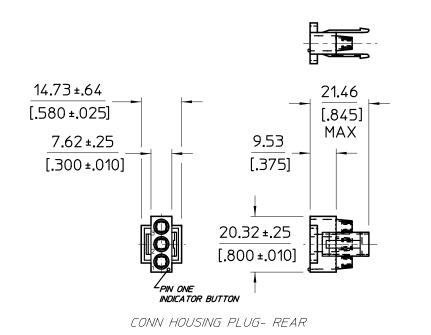

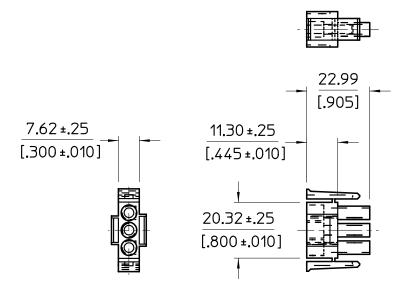

CONN HOUSING PLUG- FRONT

FEATURES:

Product Type: Housing

Connector Line: Universal MATE-N-LOK II. Contact Diameter (mm [in]): 2.13 [.084]

Centerline (mm [in]): 6.35 [.250]

No. of Circuits: 3 Contact Layout: In-Line Housing type: Plug Mount: Free Hanging

Packaging Method: Front & Rear Component

Housing Material: Nylon

Color: White

Lock Type: Positive Lock

High Current: No

OTHER PROPERTIES:
Packaging Quantity: 250
Voltage: 600 Volts

Current Rating: 19 Amps Max

Housing Flammability Rating: UL 94V-0

Sealable: No

Industry Application: Standard

DRAWN BY RCM			VICOR_					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM/(INCHES) TOLERANCES ARE: DECIMALS .XXX= ± 0.13/[.005]		CONNECTOR HSG, 3 PIN, 19A, 600V UNIVERSAL PLUG						
THIRD ANGLE I	size B	6713	1	DWG NO	20687		01	
DO NOT SCALE	DRAWING	SCALE	FULL			SHEET 1	OF	1