

HDSL MAGNETICS

Transformer

TM99AG


- Designed for signal transmission over the frequency range of 1 kHz to 1 MHz
- Compatible with IEC-950-based safety standards
- UL, CSA, BABT and VDE approved
- Minimum interwinding breakdown voltage of 3000 Vrms

ELECTRICALS at 25° C

Part Number	Turns Ratio ± 3%	Primary Inductance* mH min	Leakage Inductance μH max	DCR Ω max		Interwinding Capacitance pF max
				Pri	Sec	
2776C	1 : 1	23	12	2.24	1.7	18

* Measured at 1 kHz, 0.1 Vac


SCHEMATIC

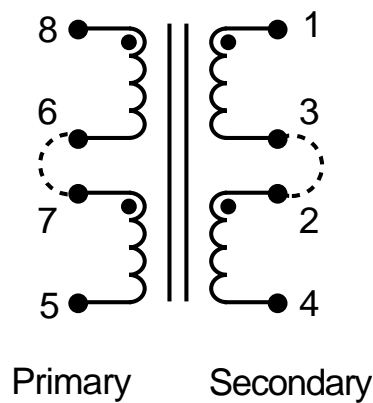

TM99AG

MECHANICAL

2776C

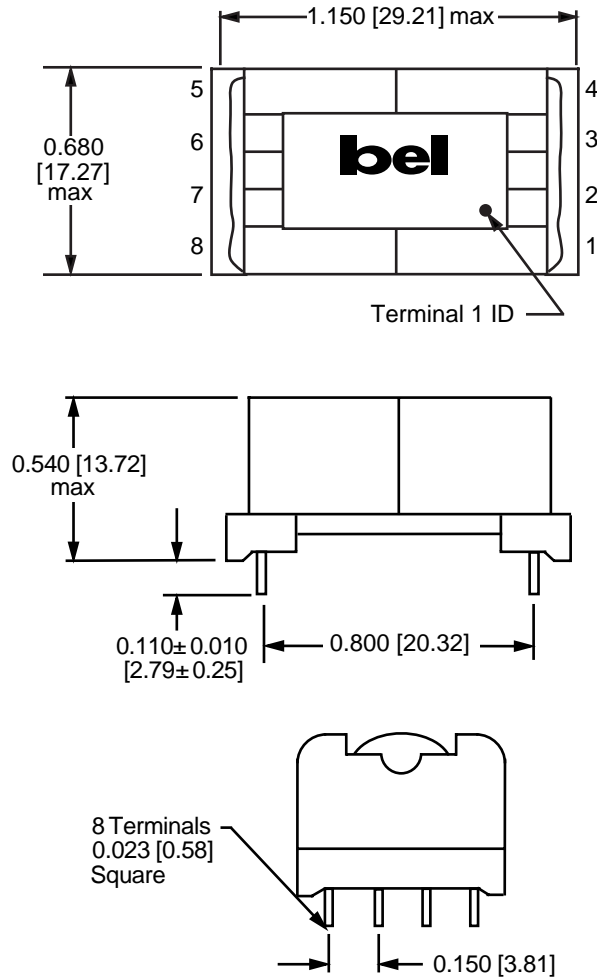

Note: Unless otherwise specified, dimensions are nominal and in inches [millimeters].

©1999 Bel Fuse Inc. Specifications subject to change without notice.

CORPORATE

Bel Fuse Inc.
198 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

PAGE#

FAR EAST

Bel Fuse Ltd.
8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite F23, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com