



# LED SPECIFICATION



## ATTENTION

OBSERVE PRECAUTIONS  
FOR HANDLING  
ELECTROSTATIC  
DISCHARGE  
SENSITIVE  
DEVICES

## 330MR2C


### Features:

- Single color
- High bright output
- Low power consumption
- High reliability and long life

### Descriptions:


- Dice material: AlGaInP
- Emitting Color: Super Bright Red
- Device Outline:  $\phi$  3mm Round Type
- Lens Type: Water Clear

### Directivity:

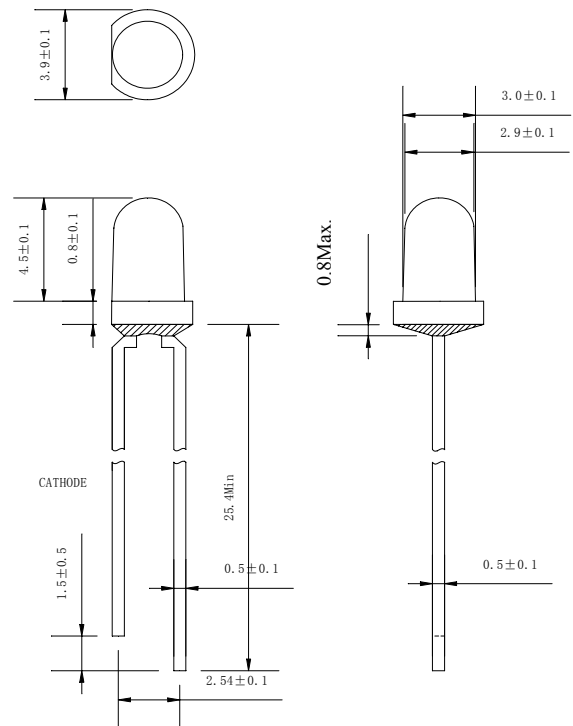

All dimensions are millimeters.

Tolerance is +/-0.25mm unless otherwise noted.

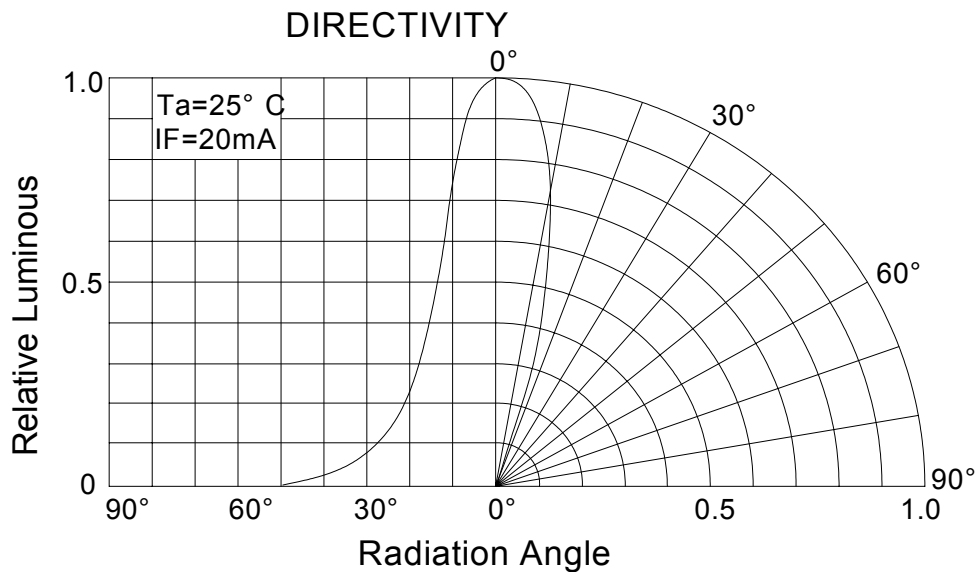



# LED SPECIFICATION

## 330MR2C

### ➤ Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Test Condition	Values		Unit
			Min.	Max.	
Reverse Voltage	VR	IR = 30 μA	5	--	V
Forward Current	IF	----		30	mA
Power Dissipation	Pd	----		75	mW
Pulse Current	Ipeak	Duty=0.1mS, 1kHz	----	100	mA
Operating Temperature	Topr	----	-20	+85	°C
Storage Temperature	Tstr	----	-25	+100	°C

### ➤ Electrical and optical characteristics (Ta = 25°C)

Parameter	Symbol	Test Condition	Values			Unit
			Min.	Typ.	Max.	
Forward Voltage	VF	IF=20mA		2.0	2.5	V
Reverse Current	IR	VR=5V	----	----	30	μA
Dominant Wavelength	λd	IF=20mA		624	----	nm
Peak Wavelength	λp	IF=20mA		632	----	nm
Spectral Line half-width	Δλ	IF=20mA	----	20	----	nm
Luminous Intensity	Iv	IF=20mA		BIN	----	mcd
Viewing Angle	2θ 1/2	IF=20mA	24.....	.....27.....	.....30	deg.

### Luminous Intensity Bins (Ta = 25°C)

Unit:mcd

Bin	S	T	U	V	W
Min	770	1100	1520	2130	3000
Max	1100	1520	2130	3000	4180

### ➤ Dominant Wavelength Bins Unit:nm

Bin	R2	R3
Min	621	624
Max	624	627

➤ **Typical electrical/optical characteristic curves/光电特性曲线:**

Fig.1 正向电流 Vs. 正向电压

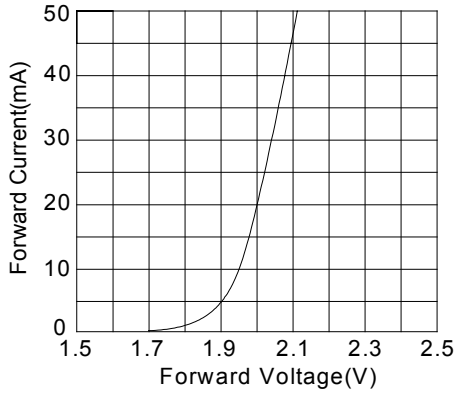


Fig.2 相对亮度 Vs. 正向电流

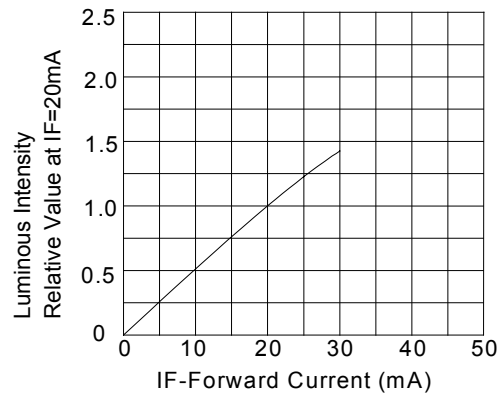


Fig.3 正向电流 Vs. 环境温度

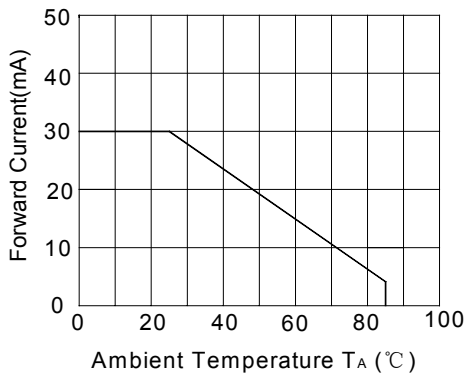


Fig.4 相对亮度 Vs. 环境温度

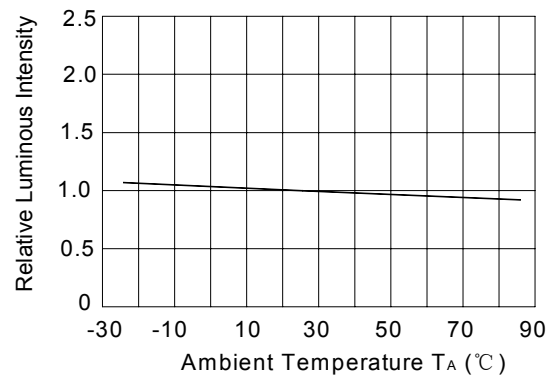


Fig.5 辐射强度 Vs. 波长

