



Large size Aluminum electrolytic capacitors

Introduction

The B41605 and B41607 series were designed for applications with stringent demands for power and current carrying capacity at ambient temperatures ranging up to 150 °C. Tinned copper leads of 1.2 mm diameter, also allowing determination of the poles because of the different lead length, can be either welded or soldered.

To stand up to extreme demands for vibrational stability in an automobile, EPCOS developed a special process for these models, in the meantime patented, that fixes the capacitor winding so reliably by a sophisticated corrugation configuration that vibrational stability of **40 g** can be specified even for these large-sized models.


40 g vibration stability version



Snap-in version



Outstanding long-term 40 g vibrational strength thanks to rugged corrugation

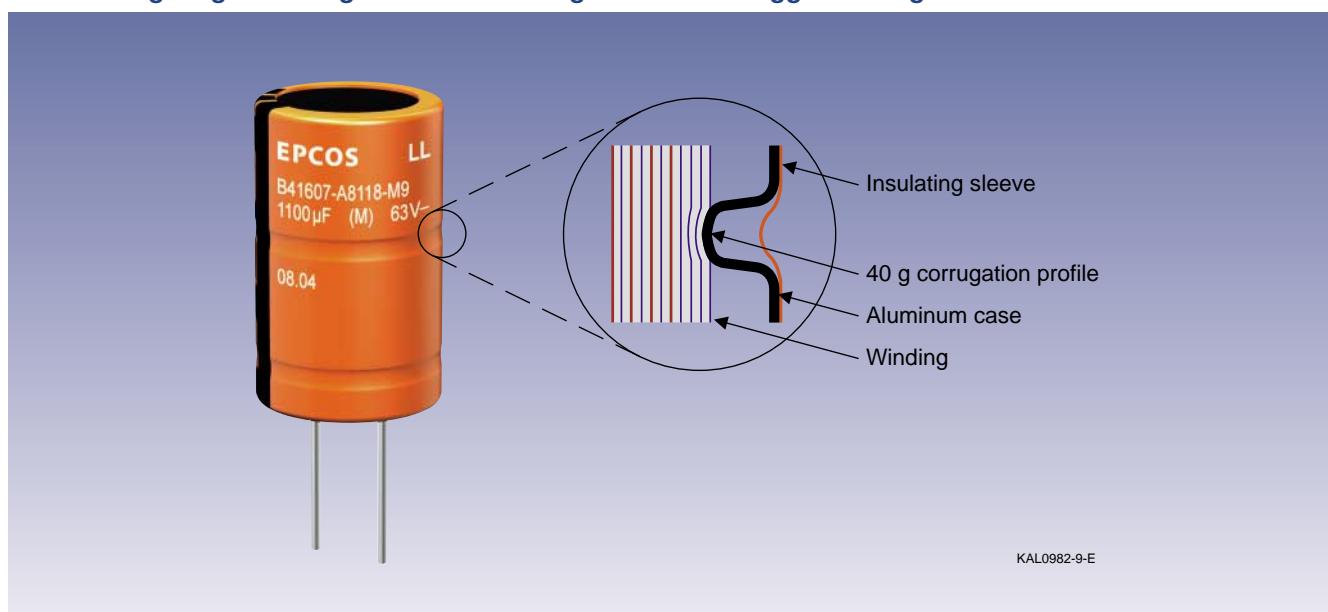

Data sheet

B41605



Specifications and characteristics in brief			
Rated voltage V_R	25 ... 63 VDC		
Surge voltage V_{surge}	$1.15 \cdot V_R$		
Rated capacitance C_R	1500 ... 20000 μF		
Capacitance tolerance	$\pm 20\% \leq M$		
Leakage current I_{leak} (5 min, 20 °C)	$I_{\text{leak}} \leq 0.006 \cdot \mu\text{A} \left(\frac{C_R}{\mu\text{F}} \cdot \frac{V_R}{V} \right) + 4 \mu\text{A}$		
Self-inductance ESL	10 nH		
Useful life 140 °C; V_R ; 0.6 · I_{R} 125 °C; V_R ; I_{R} 85 °C; V_R ; 2.3 · I_{R} 40 °C; V_R ; 2.0 · I_{R}	> 2 000 h > 5 000 h > 20 000 h > 500 000 h	Requirements: $\Delta C/C$ ESR I_{leak}	$\leq \pm 30\%$ of initial value ≤ 3 times initial specified limit \leq initial specified limit
Voltage endurance test 125 °C; V_R	2 000 h	Post test requirements: $\Delta C/C$ ESR I_{leak}	$\leq \pm 10\%$ of initial value ≤ 1.3 times initial specified limit \leq initial specified limit
Vibration resistance	To IEC 60068-2-6, test Fc: 40 g vibration stability version displacement amplitude 3 mm, frequency range at 10 Hz ... 2 kHz, acceleration max. 40 g, duration 3 x 2 h		
IEC climatic category	To IEC 60068-1: 55/125/56 (-55 °C/+125 °C/56 days damp heat test)		
Detail specification Sectional specification	Similar to CECC 30301-809 IEC 60384-4		

Features


- Extremely high reliability and long useful life
- Very high ripple current capability optimized for high frequencies
- Can be operated at temperatures up to 140 °C
- Compact design
- Vibration resistance up to 40 g
- Shelf life more than 15 years
- Variable pin configurations
 - 40 g vibration stability version with wired terminals.
 - Weldable and solderable terminals. Tinned copper leads (\varnothing 1.2 mm).
 - Snap-in with 3 terminals, protection against polarity reversal.
- Without insulation sleeve upon request



Data sheet


B41605

Large size capacitor, 40 g vibration stability version with wired terminals

Dimensional drawing	Dimensions and weights		
	Dimensions (mm)	Approx. weight (g)	
	d +1	I ± 2	
*) Permissible range of positions for minus pole marking	22	40	21
	25	40	28
	25	50	35
	30	50	50
	35	50	68

Packing units on request.

Large size capacitor, snap-in version with 3 terminals

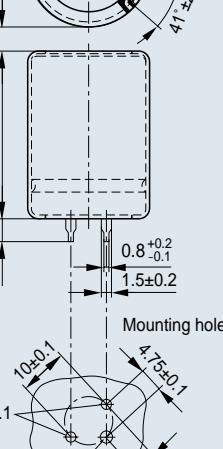Dimensional drawing	Dimensions, weights and packing units		
	Dimensions (mm)	Approx. weight (g)	Packing units (pieces)
	d +1	I ± 2	
	22	40	160
	25	40	130
	25	50	130
	30	50	80
	35	50	60

Data sheet

B41605



Technical data, case dimensions and ordering codes

V_R VDC	C_R 100 Hz 20 °C µF	Case dimensions d x l mm	ESR_{typ} 100 Hz 20 °C mΩ	ESR_{max} 100 Hz 20 °C mΩ	ESR_{max} -40 °C mΩ	ESR_{max} 10 kHz 20 °C mΩ	Z_{max} 100 kHz 20 °C mΩ	I_{~max} 10 kHz 105 °C A	I_{~R} 10 kHz 125 °C A	I_{~max} 10 kHz 140 °C A	Ordering code
25	5000	22 x 40	22	30	115	28	27	10.0	5.1	3.1	B41605A5508M**
	6800	25 x 40	15	21	80	18	18	13.5	6.9	4.1	B41605A5688M**
	10000	25 x 50	11	15	55	13	13	17.2	8.8	5.3	B41605A5109M**
	13000	30 x 50	10	14	45	12	12	18.8	9.6	5.8	B41605A5139M**
	20000	35 x 50	9	12	32	12	12	19.0	9.7	5.8	B41605A5209M**
40	3000	22 x 40	25	35	115	29	27	9.8	5.0	3.0	B41605A7308M**
	3800	25 x 40	18	25	80	18	18	13.5	6.9	4.1	B41605A7388M**
	5400	25 x 50	13	18	60	14	14	17.2	8.8	5.3	B41605A7548M**
55	1800	22 x 40	30	43	115	29	27	9.8	5.0	3.0	B41605A0188M**
	2700	25 x 40	19	27	80	18	18	13.5	6.9	4.1	B41605A0278M**
	3600	25 x 50	15	21	60	13	13	17.2	8.8	5.3	B41605A0368M**
	5000	30 x 50	12	17	45	12	12	18.7	9.6	5.8	B41605A0508M**
	7000	35 x 50	11	15	35	12	12	19.1	9.8	5.9	B41605A0708M**
63	1500	22 x 40	32	44	115	28	27	9.6	4.9	2.9	B41605A8158M**
	2100	25 x 40	22	30	85	18	18	13.5	6.9	4.1	B41605A8218M**
	2700	25 x 50	17	24	65	14	14	17.2	8.8	5.3	B41605A8278M**
	4000	30 x 50	13	18	45	12	12	18.7	9.6	5.8	B41605A8408M**
	5600	35 x 50	11	16	35	12	12	19.1	9.8	5.9	B41605A8568M**

*** = "002" for snap-in version with 3 terminals (protection against polarity reversal), fully insulated.

"009" for 40 g vibration stability version with wired terminals, fully insulated.




Data sheet

B41605

Characteristics


Useful life

depending on ambient temperature T_A under ripple current operating conditions at V_R

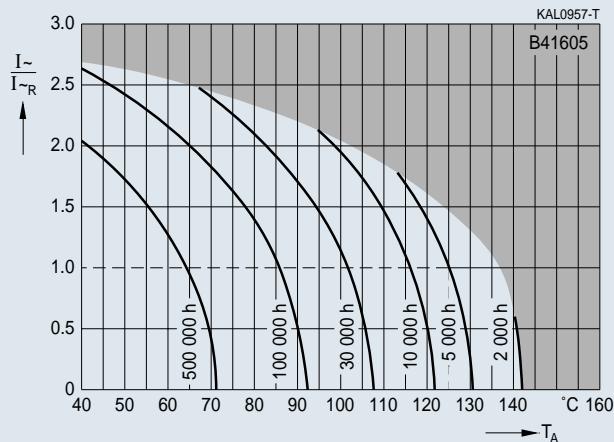

Useful life

depending on case temperature T_C under ripple current operating conditions at V_R

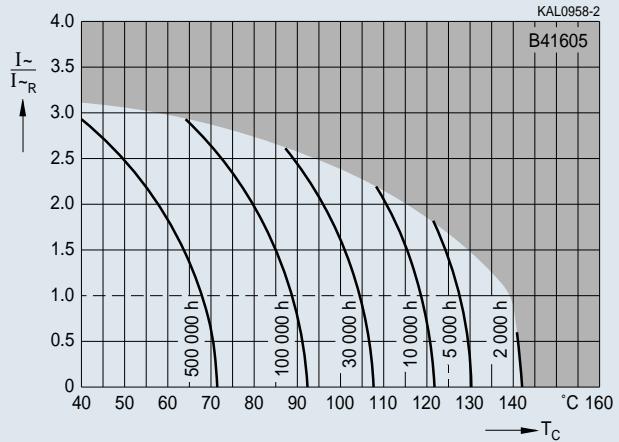

Useful life


depending on ambient temperature T_A under ripple current operating conditions at V_{op}

$V_R = 25 \text{ V}: V_{\text{op}} \leq 20 \text{ V}$

$V_R = 40 \text{ V}: V_{\text{op}} \leq 35 \text{ V}$

$V_R = 55 \text{ V}: V_{\text{op}} \leq 48 \text{ V}$

$V_R = 63 \text{ V}: V_{\text{op}} \leq 55 \text{ V}$

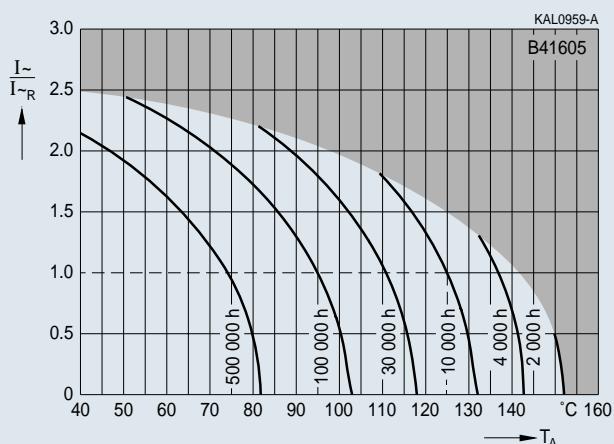

Useful life


depending on case temperature T_C under ripple current operating conditions at V_{op}

$V_R = 25 \text{ V}: V_{\text{op}} \leq 20 \text{ V}$

$V_R = 40 \text{ V}: V_{\text{op}} \leq 35 \text{ V}$

$V_R = 55 \text{ V}: V_{\text{op}} \leq 48 \text{ V}$

$V_R = 63 \text{ V}: V_{\text{op}} \leq 55 \text{ V}$

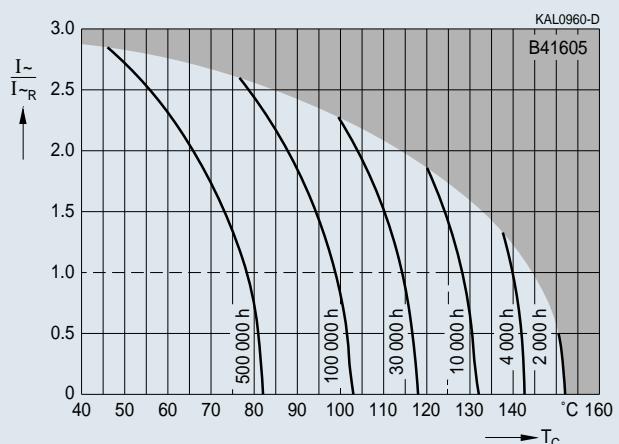


Data sheet

B41605




Characteristics


Frequency factor of permissible ripple current I_{\sim} versus frequency f

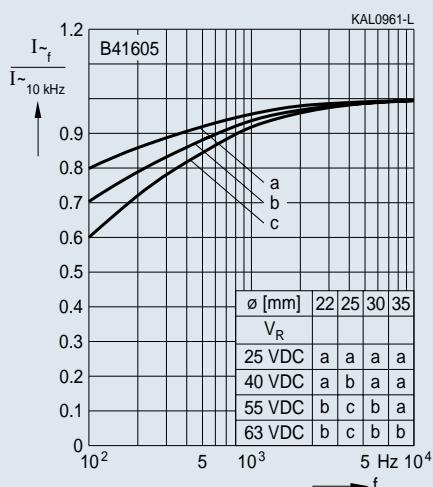


Frequency characteristics of ESR versus frequency f at different temperatures T
Typical behavior

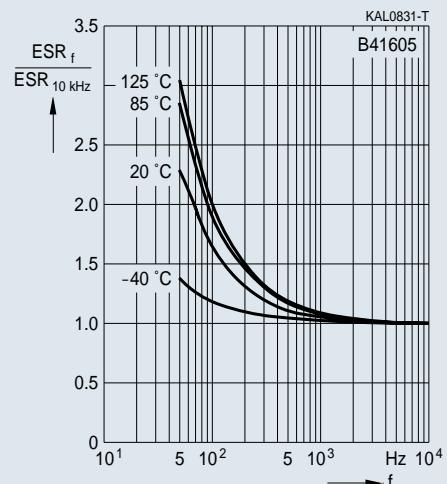

Equivalent series resistance ESR versus frequency f at different temperatures
Typical behavior for 2700 μ F/55 V

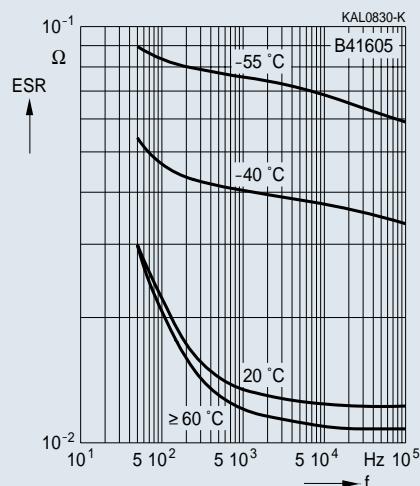

Impedance Z versus frequency f at different temperatures
Typical behavior for 2700 μ F/55 V

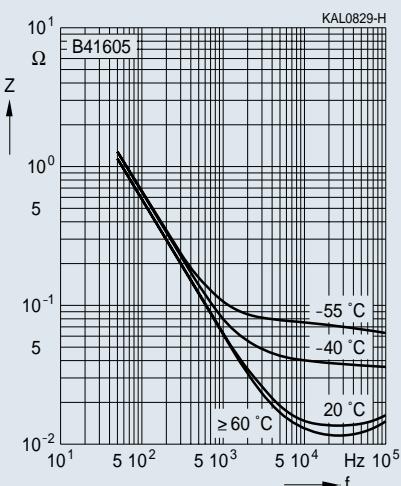

Herausgegeben von EPCOS AG

Unternehmenskommunikation, Postfach 80 17 09, 81617 München, DEUTSCHLAND

☎ ++49 89 636 09, FAX (0 89) 636-2 26 89

© EPCOS AG 2004. Vervielfältigung, Veröffentlichung, Verbreitung und Verwertung dieser Broschüre und ihres Inhalts ohne ausdrückliche Genehmigung der EPCOS AG nicht gestattet.

Bestellungen unterliegen den vom ZVEI empfohlenen Allgemeinen Lieferbedingungen für Erzeugnisse und Leistungen der Elektroindustrie, soweit nichts anderes vereinbart wird.

Diese Broschüre ersetzt die vorige Ausgabe.

Fragen über Technik, Preise und Liefermöglichkeiten richten Sie bitte an den Ihnen nächstgelegenen Vertrieb der EPCOS AG oder an unsere Vertriebsgesellschaften im Ausland. Bauelemente können aufgrund technischer Erfordernisse Gefahrstoffe enthalten. Auskünfte darüber bitten wir unter Angabe des betreffenden Typs ebenfalls über die zuständige Vertriebsgesellschaft einzuholen.

Published by EPCOS AG

Corporate Communications, P.O. Box 80 17 09, 81617 Munich, GERMANY

☎ ++49 89 636 09, FAX (0 89) 636-2 26 89

© EPCOS AG 2004. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.