




The information contained in this document is proprietary to VARRTRONIX LTD. and shall be protected from any reproduction in part or as a whole without Varrtronix's written approval.

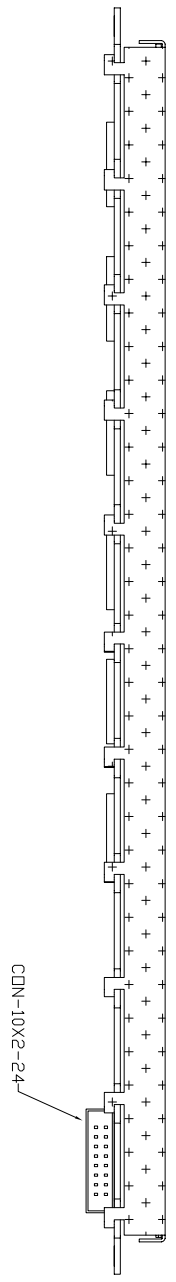

(DOT SIZE FOR CUSTOMER REFERENCE ONLY)

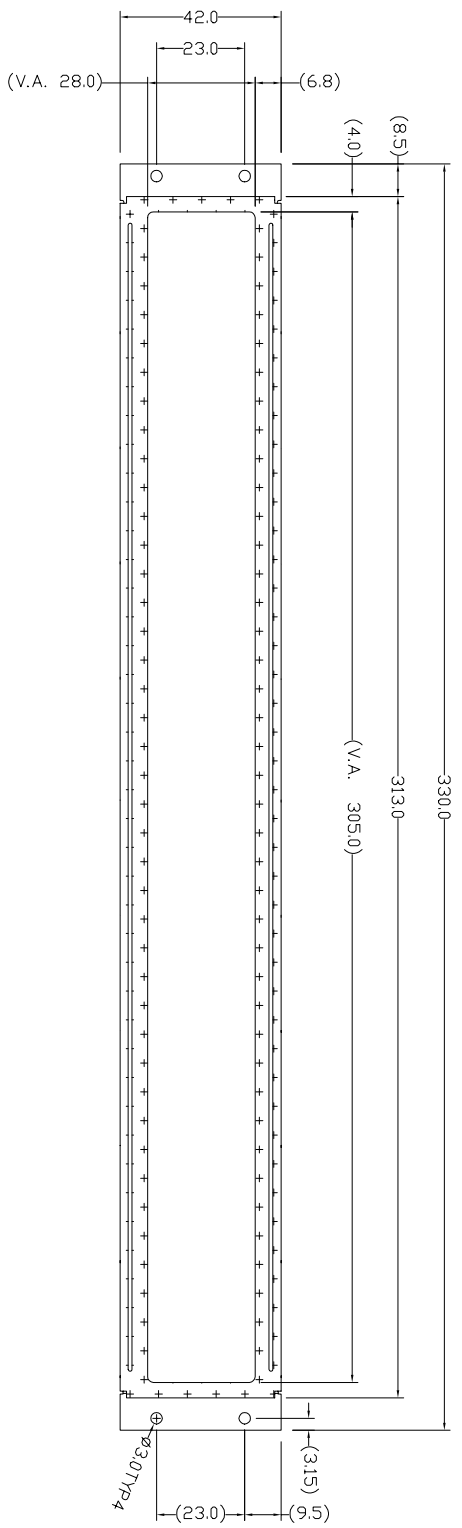


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VLCD	GND	VDD	M	DOFF	FLM	LP-C	LP-S	XCK	D0	D1	D2	D3	AD0	AD1	AD2

- NOTES:
- 1 ◇ : SPECIAL CHARACTERISTIC
  - 2 + : SAFETY CHARACTERISTIC
  - 3 ▽ : CRITICAL DIMENSION
  - 4 ( ) : REFERENCE DIMENSION



VARRTRONIX LIMITED

ISSUE	AMENDMENT	DATE



Display Type	Graphic Display, Reflective, BCD, Blue & White
Display Resolution	352 x 32
Viewing Angle	All angle
Mix ratio and bias level	1/32, 1/7
Logic Voltage (V)	3V - 5V
LCD Driving Voltage	TBD
Operation Temperature	0°C to +40°C
Storage Temperature	-20°C to +70°C

TITLE: PRELIMINARY SPECIFICATION OF MODULE

PROJECT NO: BCD35232

TOLERANCE UNLESS OTHERWISE SPECIFIED:  
 X.X ±0.3  
 X.XX ±0.1  
 ANGULAR: ±1°

MATERIAL: N/A FINISH: N/A  
 SCALE: DID NOT IN SCALE OVERALL THK: N/A

THIRD ANGLE PROJECTION	NAME	SIGN	DATE

DRAWN: CHAN KAM FAI 05.07.29

CHECKED: FUNG

APPROVED: K.P.HO

ITEM NO.:  
 DESCRIPTION:  
 FILE NO.: D:/ BCD35232 REV: 1

SHEET 1 OF 1